


Standard Avalanche Sinterglass Diode

Features

- Controlled avalanche characteristics
- Glass passivated junction
- Low reverse current
- High surge current capability
- Wave and reflow solderable



15811

Applications

Surface mounting
General purpose rectifier

Parts Table

| Part | Type differentiation | Package |
|--------|---|----------|
| BYG10D | $V_R = 200 \text{ V @ } I_{FAV} = 1.5 \text{ A}$ | DO-214AC |
| BYG10G | $V_R = 400 \text{ V @ } I_{FAV} = 1.5 \text{ A}$ | DO-214AC |
| BYG10J | $V_R = 600 \text{ V @ } I_{FAV} = 1.5 \text{ A}$ | DO-214AC |
| BYG10K | $V_R = 800 \text{ V @ } I_{FAV} = 1.5 \text{ A}$ | DO-214AC |
| BYG10M | $V_R = 1000 \text{ V @ } I_{FAV} = 1.5 \text{ A}$ | DO-214AC |
| BYG10Y | $V_R = 1600 \text{ V @ } I_{FAV} = 1.5 \text{ A}$ | DO-214AC |

Absolute Maximum Ratings

$T_{amb} = 25 \text{ }^\circ\text{C}$, unless otherwise specified

| Parameter | Test condition | Part | Symbol | Value | Unit |
|--|---|-------------------|-----------------|---------------|------------------|
| Reverse voltage = Repetitive peak reverse voltage | | BYG10D | $V_R = V_{RRM}$ | 200 | V |
| | | BYG10G | $V_R = V_{RRM}$ | 400 | V |
| | | BYG10J | $V_R = V_{RRM}$ | 600 | V |
| | | BYG10K | $V_R = V_{RRM}$ | 800 | V |
| | | BYG10M | $V_R = V_{RRM}$ | 1000 | V |
| | | BYG10Y | $V_R = V_{RRM}$ | 1600 | V |
| Peak forward surge current | $t_p = 10 \text{ ms}$, half sinewave | | I_{FSM} | 30 | A |
| Average forward current | | | I_{FAV} | 1.5 | A |
| Junction and storage temperature range | | | $T_j = T_{stg}$ | - 55 to + 150 | $^\circ\text{C}$ |
| Pulse energy in avalanche mode, non repetitive (inductive load switch off) | $I_{(BR)R} = 1 \text{ A}$, $T_j = 25 \text{ }^\circ\text{C}$ | BYG10D- BYG10M | E_R | 20 | mJ |

Maximum Thermal Resistance

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

| Parameter | Test condition | Part | Symbol | Value | Unit |
|------------------|---|------|------------|-------|------|
| Junction lead | $T_L = \text{const.}$ | | R_{thJL} | 25 | K/W |
| Junction ambient | mounted on epoxy-glass hard tissue | | R_{thJA} | 150 | K/W |
| | mounted on epoxy-glass hard tissue, 50 mm ² 35 μm Cu | | R_{thJA} | 125 | K/W |
| | mounted on Al-oxid-ceramic (Al ₂ O ₃), 50 mm ² 35 μm Cu | | R_{thJA} | 100 | K/W |

Electrical Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

| Parameter | Test condition | Part | Symbol | Min | Typ. | Max | Unit |
|-----------------------|---|------|----------|-----|------|------|------|
| Forward voltage | $I_F = 1\text{ A}$ | | V_F | | | 1.1 | V |
| | $I_F = 1.5\text{ A}$ | | V_F | | | 1.15 | V |
| Reverse current | $V_R = V_{RRM}$ | | I_R | | | 1 | μA |
| | $V_R = V_{RRM}, T_j = 100\text{ }^{\circ}\text{C}$ | | I_R | | | 10 | μA |
| Reverse recovery time | $I_F = 0.5\text{ A}, I_R = 1\text{ A}, i_R = 0.25\text{ A}$ | | t_{rr} | | | 4 | μs |

Typical Characteristics ($T_{amb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

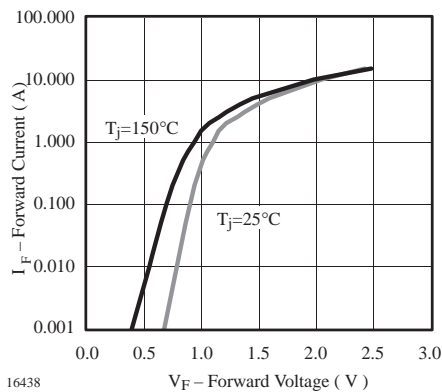


Figure 1. Forward Current vs. Forward Voltage

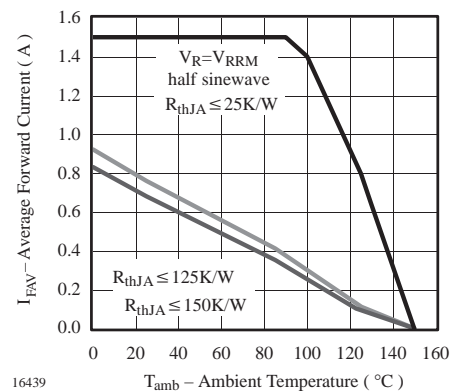


Figure 2. Max. Average Forward Current vs. Ambient Temperature

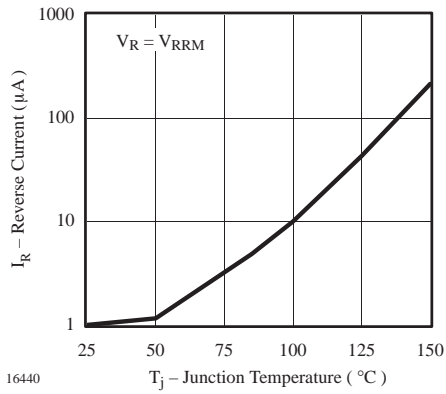


Figure 3. Reverse Current vs. Junction Temperature

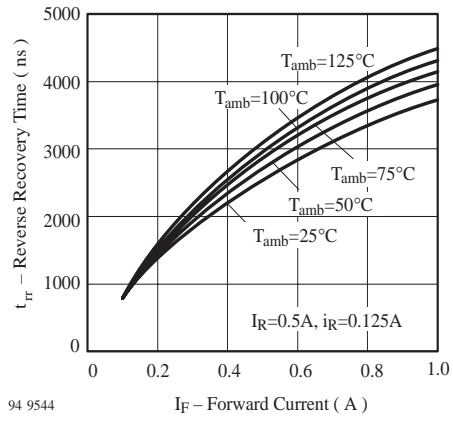


Figure 6. Typ. Reverse Recovery Time vs. Forward Current

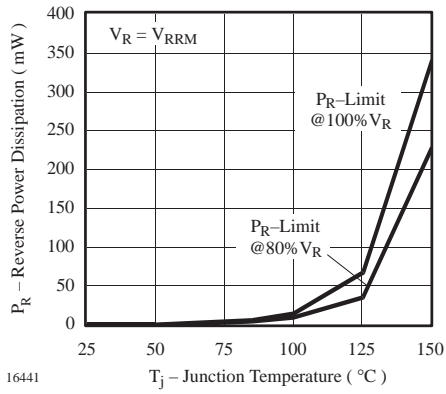


Figure 4. Max. Reverse Power Dissipation vs. Junction Temperature

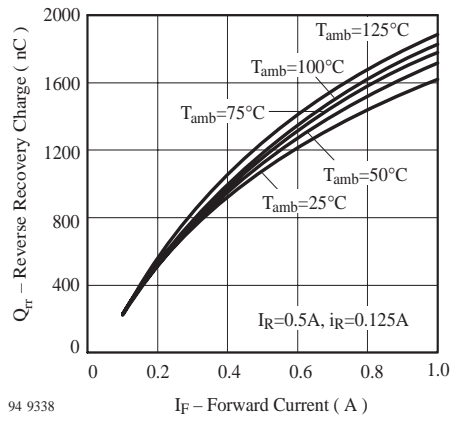


Figure 7. Typ. Reverse Recovery Charge vs. Forward Current

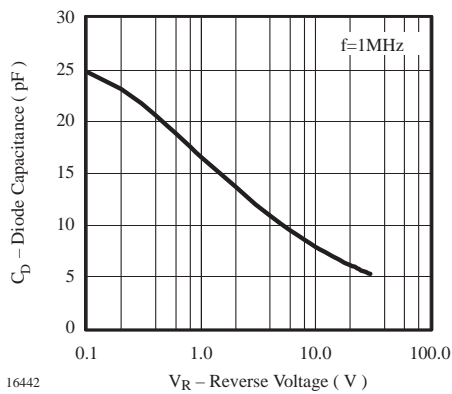


Figure 5. Diode Capacitance vs. Reverse Voltage


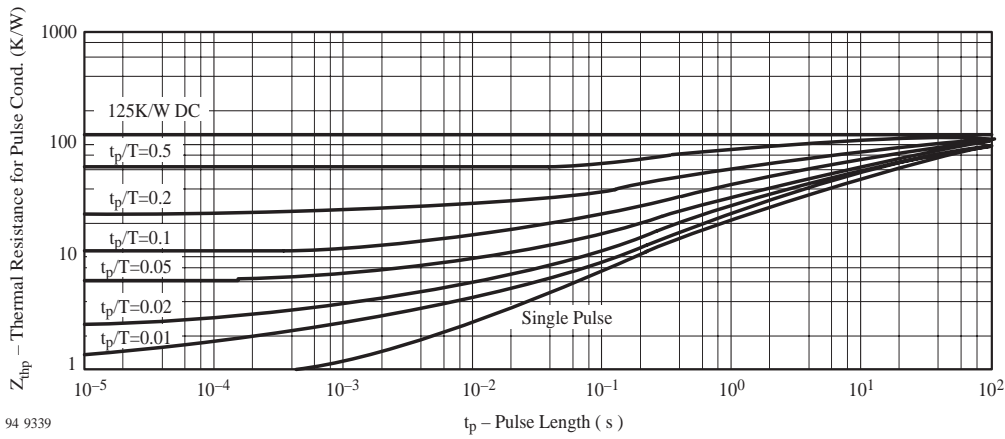


Figure 8. Thermal Response

Package Dimensions in mm



14275-1

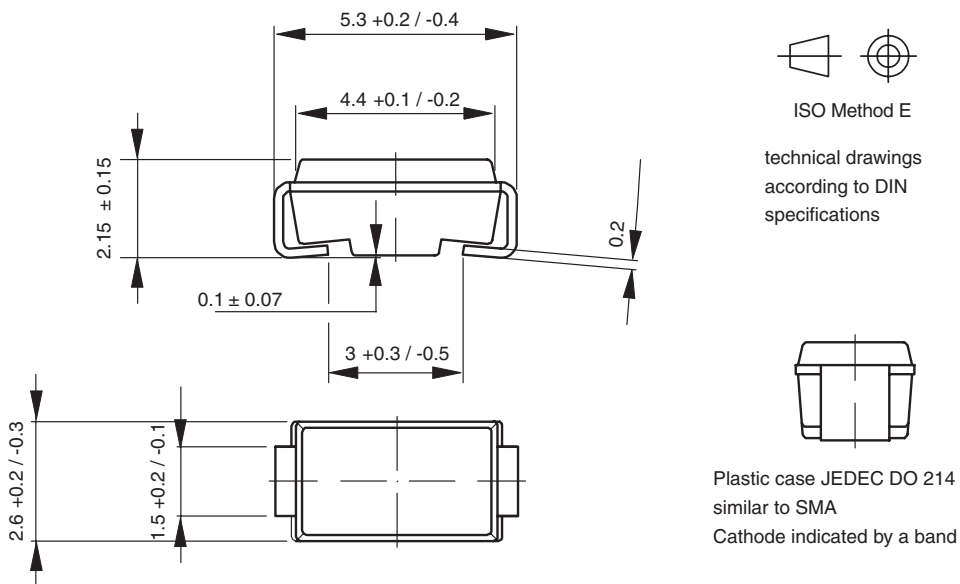

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.