

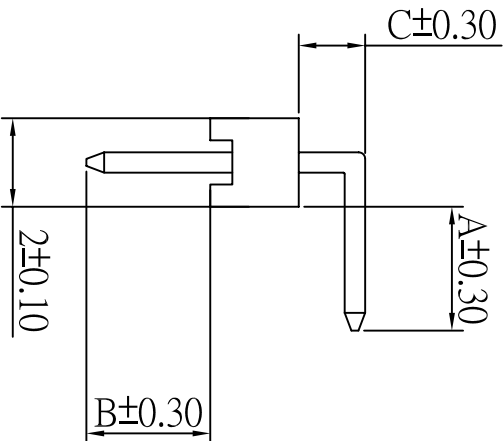


CUSTOMER COPY

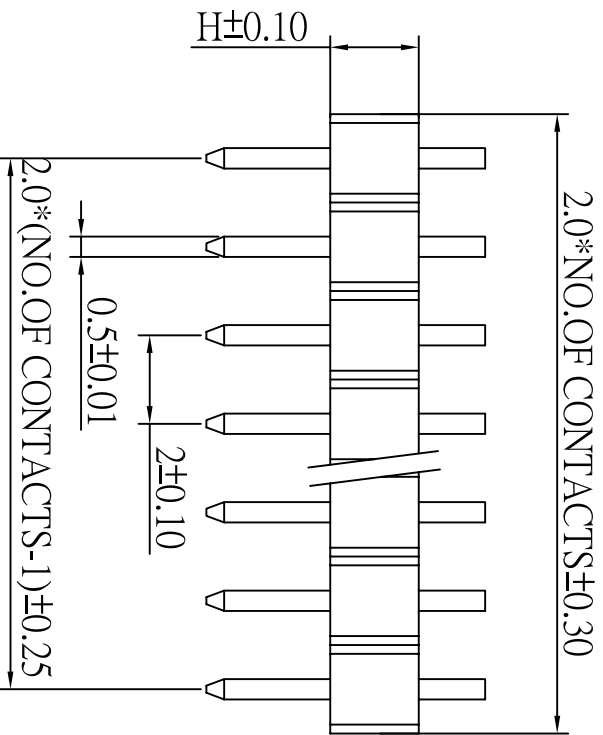

Pin Chart

No.	A	B	C	H
00	12.50	2.30	2.00	2.00
01	4.00	2.80	1.25	2.00
02	7.50	2.00	0.50	2.00
03	7.00	2.00	2.00	2.00
04	5.50	2.00	1.00	2.00
05	4.00	2.80	2.00	2.00

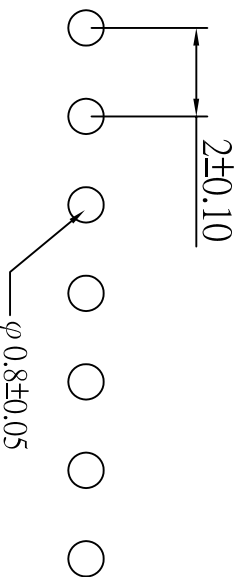

Recommended P.C. Board
Hole Layout

ORDER INFORMATION

183 00 XX XX X

REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

Plating:
3: All Gold
No. Of Contacts
(02 ~ 40)

Type
Pin chart

SPECIFICATION

- * Current Rating: 1 A
- * Withstanding Voltage: 600 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 30 Milliohms MAX.
- * Operating Temperature: -40°C to +85°C
- * Contact: BRASS
- 0.50mm square post
- * Insulator: High temperature plastic
- * Retention Force: 600g MIN.
- * Plating: All Gold

MATERIAL



ACMELUX CO., LTD.
TEL:886-85124595 FAX:886-85124322

0.0±	SCALE:	TITLE:	PART NO:109210
0.00±	UNIT:	2.00MM (.079") CENTER PIN	APP BY:
0.000±	MM	HEADER R/A single Row	CHK BY:



DWG. NO. C18300XXXXX DR BY: J.C