

.079" (2.00mm) 2000 SERIES CRIMP TERMINAL HOUSING

SPECIFICATION

- * Current Rating:
2 A
- * Withstanding Voltage:
650 VAC (1 min.)
- * Insulation Resistance:
1000 MΩ min.
- * Contact Resistance:
20 mΩ max.
- * Operating Temperature:
-40°C to +85°C

MATERIAL

- * Terminal: Phosphor Bronze,
Tin Plate
- * Housing: PBT UL 94V-0

ORDER INFORMATION



Housing
H2000 - X - XX

1: Single row
2: Double row


No. of Contact
2-40

Terminal
T2000

TERMINAL

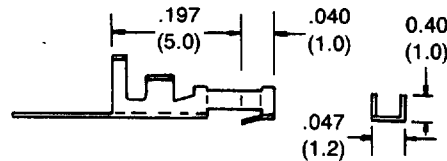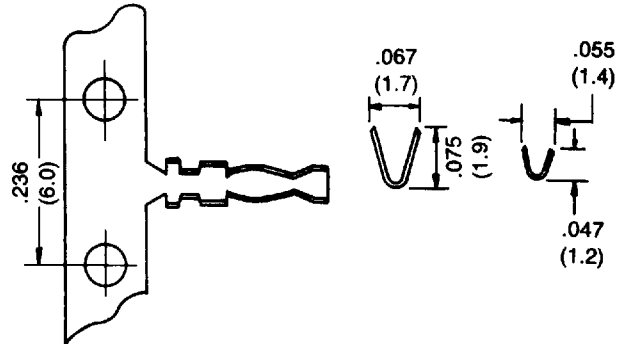

HOUSING

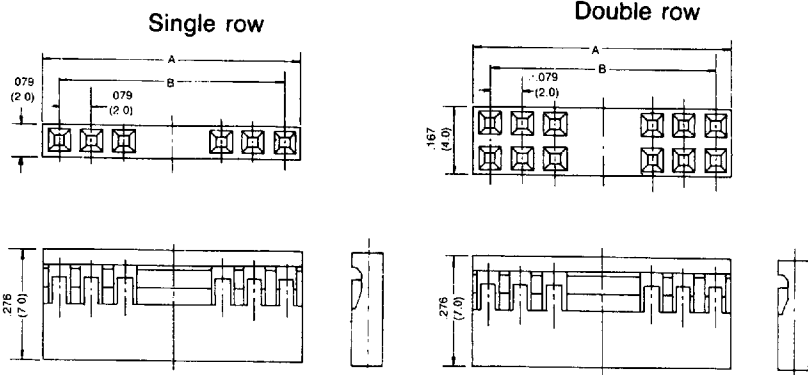

POS	A	B
2	4.0	2.0
3	6.0	4.0
4	8.0	6.0
5	10.0	8.0
6	12.0	10.0
7	14.0	12.0
8	16.0	14.0
9	18.0	16.0
10	20.0	18.0
11	22.0	20.0

POS	A	B
12	24.0	22.0
13	26.0	24.0
14	28.0	26.0
15	30.0	28.0
16	32.0	30.0
17	34.0	32.0
18	36.0	34.0
19	38.0	36.0
20	40.0	38.0

Specifications are subject to change without notice