

SPECIFICATIONS

Mechanical

Contact Retention Force: 1.0Kg min.

Electrical

Voltage Rating: 750V

Current Rating: 1A

Contact Resistance: 45mΩ max.

Dielectrical Withstanding Voltage: 1000V

Insulation Resistance: 1000MΩ min.

Physical

Housing: LCP, UL 94-0 rated, Ivory White

Contact: Phosphor Bronze

Plating: See "ORDERING INFORMATION"


FUTURE BUS CONNECTOR

1F Series


Header Press Fit Type

2.0mm Pitch

4 Rows



DRAWING

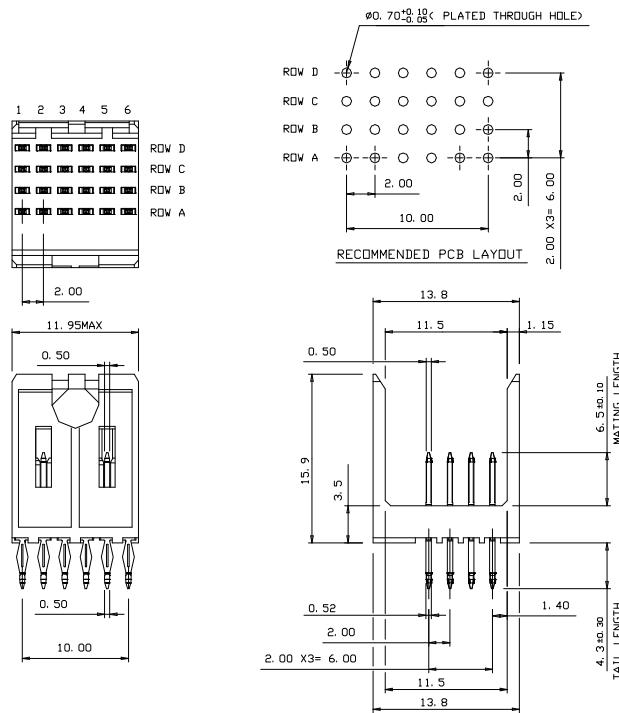

ORDERING INFORMATION

PRODUCT NO.: 1 F 1 1 * * * * - P 0 8 H 0 * - * *

POS. NO.: _____
024=024 pos.

Mating Area Plating: _____

- 1=GOLD FLASH
- 3=0.76um(30u")MIN. GOLD PLATING
- 5=1.27um(50u")MIN. GOLD PLATING
- 6=0.25um(10u")MIN. GOLD PLATING
- A=0.76um(30u")MIN. FPT PLATING,
- 0.25um(10u")MIN. GOLD INCLUDED
- C=1.27um(50u")MIN. FPT PLATING.
- 0.50um(10u")MIN. GOLD INCLUDED.
- D=1.27um(50u")MIN. FPT PLATING.
- 0.25um(10u")MIN. GOLD INCLUDED.
- K=0.50um(20u")MIN. FPT PLATING.
- GOLD FLASH INCLUDED.

Lead Free Code:

- N=None
- F=Lead Free

Package Type:

- A=Tube

Extension Code:

- N,T,L,M

BODY STYLE

(SPECIAL FOR ERICSSON)

Tail Style:

- P=Press Fit