

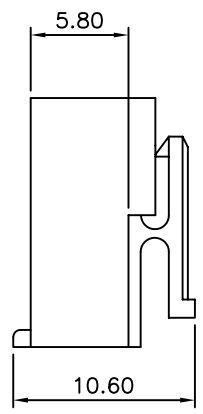
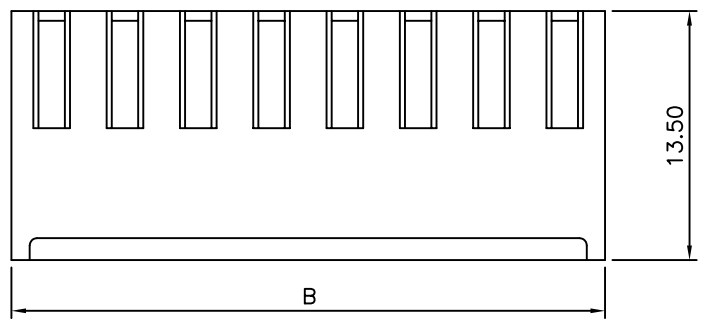


SPECIFICATIONS

Current Rating: 7A AC/DC
 Voltage Rating: 250V AC/DC
 Insulation Resistance: 1000 Megohms
 Withstand Voltage: 1000V AC/Minute
 Temperature Range: -25°C To +85°C
 Material: Nylon 66, UL94V-0

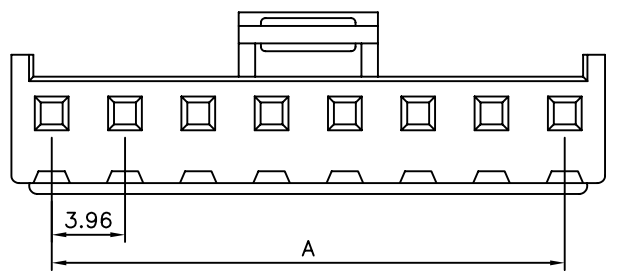

| Poles | A | B [△] |
|-------|-------|----------------|
| 2 | 3.96 | 8.22 |
| 3 | 7.92 | 12.18 |
| 4 | 11.88 | 16.14 |
| 5 | 15.84 | 20.10 |
| 6 | 19.80 | 24.06 |
| 7 | 23.76 | 28.02 |
| 8 | 27.72 | 31.98 |
| 9 | 31.68 | 35.94 |
| 10 | 35.64 | 39.90 |
| 11 | 39.60 | 43.86 |
| 12 | 43.56 | 47.87 |



A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

| | | | | |
|----------------------|------|--------------------|----|--|
| CATEGORY | | APPROVED BY MEI | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.50 .XX ±0.25 .XXX ±0.10 ANG. ±2° |
| PART No. VHXXH | | CHECKED BY SHIN | | |
| DRAWING No. VHXXH | | DRAWING BY HZF | | |
| SCALE | NONE | REV. | A1 | |
| UNIT mm | | | | |

| | | | | |
|------|------|---------------|------|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A1 | | Update DIM. B | HZF | 12/05/2008 |
| △ A0 | | NEW RELEASE | SHIN | 04/16/2006 |