
**FUNCTIONAL DIAGRAM &
TERMINAL ASSIGNMENT**

The RCA CD54/74AC14 and CD54/74ACT14 each contain six inverting Schmitt Triggers in one package. These devices use the RCA ADVANCED CMOS technology.

The CD74AC14 and CD74ACT14 are supplied in 14-lead dual-in-line plastic packages (E suffix) and in 14-lead dual-in-line small-outline plastic packages (M suffix). Both package types are operable over the following temperature ranges: Commercial (0 to 70°C); Industrial (-40 to +85°C); and Extended Industrial/Military (-55 to +125°C).

The CD54AC14 and CD54ACT14, available in chip form (H suffix), are operable over the -55 to +125°C temperature range.

Hex Inverting Schmitt Trigger


Type Features:

- Operates with much slower than standard input rise and fall slew rates
- Exceptionally high noise immunity

Family Features:

- Exceeds 2-kV ESD Protection - MIL-STD-883, Method 3015
- SCR-Latchup-resistant CMOS process and circuit design
- Speed of bipolar FAST®/AS/S with significantly reduced power consumption
- Balanced propagation delays
- AC types feature 1.5-V to 5.5-V operation and balanced noise immunity at 30% of the supply
- $\pm 24\text{-mA}$ output drive current
 - Fanout to 15 FAST® ICs
 - Drives 50- Ω transmission lines
- Greater noise immunity than standard inverters

*FAST is a Registered Trademark of Fairchild Semiconductor Corp.

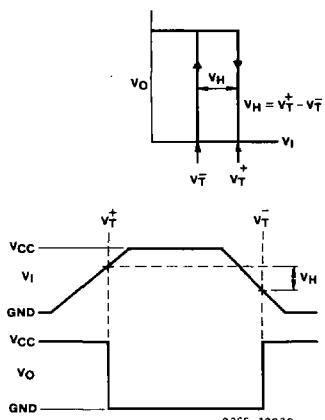
Fig. 1 - Hysteresis definition and characteristic.

TRUTH TABLE

INPUT	OUTPUT
A	Y
L	H
H	L

H = High Level
L = Low Level

CD54/74AC14**CD54/74ACT14****MAXIMUM RATINGS, Absolute-Maximum Values:**

DC SUPPLY-VOLTAGE (V_{cc})	-0.5 to 6 V
DC INPUT DIODE CURRENT, I_{ik} (for $V_i < -0.5$ V or $V_i > V_{cc} + 0.5$ V)	± 20 mA
DC OUTPUT DIODE CURRENT, I_{ok} (for $V_o < -0.5$ V or $V_o > V_{cc} + 0.5$ V)	± 50 mA
DC OUTPUT SOURCE OR SINK CURRENT per Output Pin, I_o (for $V_o > -0.5$ V or $V_o < V_{cc} + 0.5$ V)	± 50 mA
DC V_{cc} or GROUND CURRENT (I_{cc} or I_{GND})	+100 mA*

POWER DISSIPATION PER PACKAGE (P_D):

For $T_A = -55$ to $+100^\circ\text{C}$ (PACKAGE TYPE E)	500 mW
For $T_A = -100$ to $+125^\circ\text{C}$ (PACKAGE TYPE E)	Derate Linearly at $8 \text{ mW}/^\circ\text{C}$ to 300 mW
For $T_A = -55$ to $+70^\circ\text{C}$ (PACKAGE TYPE M)	400 mW
For $T_A = -70$ to $+125^\circ\text{C}$ (PACKAGE TYPE M)	Derate Linearly at $6 \text{ mW}/^\circ\text{C}$ to 70 mW

OPERATING-TEMPERATURE RANGE (T_A)**STORAGE TEMPERATURE (T_{stg})****LEAD TEMPERATURE (DURING SOLDERING):**

At distance $1/16 \pm 1/32$ in. (1.59 ± 0.79 mm) from case for 10 s maximum $+265^\circ\text{C}$

Unit inserted into PC board min. thickness $1/16$ in. (1.59 mm) with solder contacting lead tips only $+300^\circ\text{C}$

*For up to 4 outputs per device, add ± 25 mA for each additional output.

RECOMMENDED OPERATING CONDITIONS:

For maximum reliability, normal operating conditions should be selected so that operation is always within the following ranges:

CHARACTERISTIC	LIMITS		UNITS
	MIN.	MAX.	
Supply-Voltage Range, V_{cc} *: (For T_A = Full Package-Temperature Range) AC Types ACT Types	1.5 4.5	5.5 5.5	V V
DC Input or Output Voltage, V_i , V_o	0	V_{cc}	V
Operating Temperature, T_A	-55	+125	$^\circ\text{C}$
Input Rise and Fall Slew Rate, dt/dv †: at 1.5 V to 5.5 V (AC Types) at 4.5 V to 5.5 V (ACT Types)	0 0	150 20	ms/V ns/V

*Unless otherwise specified, all voltages are referenced to ground.

†5 Outputs switching

$V_{cc} = 5$ V

Load = 500Ω , 50 pF

T_A = Full temperature range

For AC14, V_i = 5.5 V sawtooth

For ACT14, V_i = 3 V sawtooth

CD54/74AC14
CD54/74ACT14

STATIC ELECTRICAL CHARACTERISTICS: AC Series

CHARACTERISTICS	TEST CONDITIONS		V _{CC} (V)	AMBIENT TEMPERATURE (T _A) - °C						UNITS	
				+25		-40 to +85		-55 to +125			
	V _I (V)	I _O (mA)		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
Positive-Going Threshold Voltage	V _T ⁺		5	2.6	3.4	2.6	3.4	2.6	3.4	V	
Negative-Going Threshold Voltage	V _T ⁻		5	1.6	2.4	1.6	2.4	1.6	2.4	V	
Hysteresis Voltage	V _H		5	0.5	—	0.5	—	0.5	—	V	
High-Level Output Voltage	V _{OH}	V _T ⁺ or V _T ⁻ #, *	-0.05	1.5	1.4	—	1.4	—	1.4	—	V
			-0.05	3	2.9	—	2.9	—	2.9	—	
			-0.05	4.5	4.4	—	4.4	—	4.4	—	
			-4	3	2.58	—	2.48	—	2.4	—	
			-24	4.5	3.94	—	3.8	—	3.7	—	
			-75	5.5	—	—	3.85	—	—	—	
			-50	5.5	—	—	—	—	3.85	—	
Low-Level Output Voltage	V _{OL}	V _T ⁺ or V _T ⁻ #, *	0.05	1.5	—	0.1	—	0.1	—	0.1	V
			0.05	3	—	0.1	—	0.1	—	0.1	
			0.05	4.5	—	0.1	—	0.1	—	0.1	
			12	3	—	0.36	—	0.44	—	0.5	
			24	4.5	—	0.36	—	0.44	—	0.5	
			75	5.5	—	—	—	1.65	—	—	
			50	5.5	—	—	—	—	—	1.65	
Input Leakage Current	I _I	V _{CC} or GND	—	5.5	—	±0.1	—	±1	—	±1	μA
Quiescent Supply Current,SSI	I _{CC}	V _{CC} or GND	0	5.5	—	4	—	40	—	80	μA

#Test one output at a time for a 1-second maximum duration. Measurement is made by forcing current and measuring voltage to minimize power dissipation.

*Test verifies a minimum 50-ohm transmission-line-drive capability at +85°C, 75 ohms at +125°C.

CD54/74AC14**CD54/74ACT14**

STATIC ELECTRICAL CHARACTERISTICS: ACT Series

CHARACTERISTICS	TEST CONDITIONS	V _{CC} (V)	AMBIENT TEMPERATURE (T _A) - °C						UNITS	
			+25		-40 to +85		-55 to +125			
			MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
Positive-Going Threshold Voltage	V _{T+}		5	1.4	2	1.4	2	1.4	2	V
Negative-Going Threshold Voltage	V _{T-}		5	0.9	1.3	0.9	1.3	0.9	1.3	V
Hysteresis Voltage	V _H		5	0.4	—	0.4	—	0.4	—	V
High-Level Output Voltage	V _{OH}	V _{T+} or V _{T-}	-0.05	4.5	4.4	—	4.4	—	4.4	V
		#,* {	-24	4.5	3.94	—	3.8	—	3.7	
			-75	5.5	—	—	3.85	—	—	
			-50	5.5	—	—	—	—	3.85	
Low-Level Output Voltage	V _{OL}	V _{T+} or V _{T-}	0.05	4.5	—	0.1	—	0.1	—	V
		#,* {	24	4.5	—	0.36	—	0.44	—	
			75	5.5	—	—	—	1.65	—	
			50	5.5	—	—	—	—	1.65	
Input Leakage Current	I _I	V _{CC} or GND	—	5.5	—	±0.1	—	±1	—	±1 μA
Quiescent Supply Current,SSI	I _{QC}	V _{CC} or GND	0	5.5	—	4	—	40	—	80 μA
Additional Quiescent Supply Current per Input Pin TTL Inputs High 1 Unit Load	ΔI _{QC}	V _{CC} -2.1	—	4.5 to 5.5	—	2.4	—	2.8	—	3 mA

#Test one output at a time for a 1-second maximum duration. Measurement is made by forcing current and measuring voltage to minimize power dissipation.

* Test verifies a minimum 50-ohm transmission-line-drive capability at +85°C, 75 ohms at +125°C.

ACT INPUT LOADING TABLE

INPUT	UNIT LOAD*
ALL	0.21

*Unit load is ΔI_{QC} limit specified in Static Characteristics Chart, e.g., 2.4 mA max. @ 25°C.

CD54/74AC14 CD54/74ACT14

SWITCHING CHARACTERISTICS: AC Series; $t_r, t_f = 3$ ns, $C_L = 50$ pF

CHARACTERISTICS	SYMBOL	V_{CC} (V)	AMBIENT TEMPERATURE (T_A) - °C				UNITS	
			-40 to +85		-55 to +125			
			MIN.	MAX.	MIN.	MAX.		
Propagation Delays: Input to Output	t_{PLH} t_{PHL}	5†	2.7	9.5	2.6	10.5	ns	
Power Dissipation Capacitance	$C_{PD\$}$	—	—	45 Typ.	—	45 Typ.	pF	
Input Capacitance	C_I	—	—	10	—	10	pF	

SWITCHING CHARACTERISTICS: ACT Series; $t_r, t_f = 3$ ns, $C_L = 50$ pF


CHARACTERISTICS	SYMBOL	V_{CC} (V)	AMBIENT TEMPERATURE (T_A) - °C				UNITS	
			-40 to +85		-55 to +125			
			MIN.	MAX.	MIN.	MAX.		
Propagation Delays: Input to Output	t_{PLH} t_{PHL}	5†	3.7	13.2	3.6	14.5	ns	
			2.4	8.6	2.4	9.5		
Power Dissipation Capacitance	$C_{PD\$}$	—	—	45 Typ.	—	45 Typ.	pF	
Input Capacitance	C_I	—	—	10	—	10	pF	

†5 V: min. is @ 5.5 V
max. is @ 4.5 V

\$ C_{PD} is used to determine the dynamic power consumption, per gate.

For AC series: $P_D = V_{CC}^2 f_i (C_{PD} + C_L)$

For ACT series: $P_D = V_{CC}^2 f_i (C_{PD} + C_L) + V_{CC} \Delta I_{CC}$ where f_i = input frequency
 C_L = output load capacitance
 V_{CC} = supply voltage.

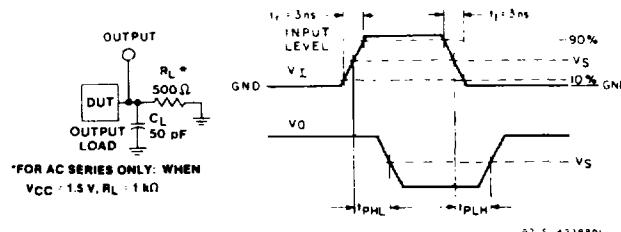

9

	CD54/74AC	CD54/74ACT
Input Level	V_{CC}	3 V
Input Switching Voltage, V_s	$0.5 V_{CC}$	1.5 V
Output Switching Voltage, V_s	$0.5 V_{CC}$	$0.5 V_{CC}$

Fig. 1 - Propagation delay times and test circuit.