

## Surface Mount Fast Switching Rectifier

### Major Ratings and Characteristics

$I_{F(AV)}$	3.0 A
$V_{RRM}$	50 V to 800 V
$I_{FSM}$	100 A
$t_{rr}$	150 ns, 250 ns, 500 ns
$V_F$	1.3 V
$T_j$ max.	150 °C



DO-214AB (SMC)

### Features

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- Fast switching for high efficiency
- High forward surge capability
- Meets MSL level 1, per J-STD-020C
- Solder Dip 260 °C, 40 seconds



### Mechanical Data

**Case:** DO-214AB (SMC)

Epoxy meets UL-94V-0 Flammability rating

**Terminals:** Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade, HE3 suffix for high reliability grade (AEC Q101 qualified)

**Polarity:** Color band denotes cathode end

### Typical Applications

For use in fast switching rectification of power supply, inverters, converters, and freewheeling diodes for consumer, automotive and Telecommunication

### Maximum Ratings

( $T_A = 25\text{ °C}$  unless otherwise noted)

Parameters	Symbols	RS3A	RS3B	RS3D	RS3G	RS3J	RS3K	Units
Device marking code		RA	RB	RD	RG	RJ	RK	
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	500	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	V
Maximum average forward rectified current at $T_L = 75\text{ °C}$	$I_{F(AV)}$	3.0						A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	$I_{FSM}$	100						A
Operating junction and storage temperature range	$T_J, T_{STG}$	- 55 to + 150						°C

### Electrical Characteristics

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

Parameters	Test condition	Symbols	RS3A	RS3B	RS3D	RS3G	RS3J	RS3K	Units
Maximum instantaneous forward voltage	at 2.5 A	$V_F$	1.3						V
Maximum DC reverse current at rated DC blocking voltage	$T_A = 25\text{ }^\circ\text{C}$ $T_A = 125\text{ }^\circ\text{C}$	$I_R$	10 250						$\mu\text{A}$
Maximum reverse recovery time	$I_F = 0.5\text{ A}$ , $I_R = 1.0\text{ A}$ , $t_{rr} = 0.25\text{ A}$	$t_{rr}$	150			250		500	ns
Typical junction capacitance	at 4.0 V, 1 MHz	$C_J$	44			34			pF

### Thermal Characteristics

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

Parameters	Symbols	RS3A	RS3B	RS3D	RS3G	RS3J	RS3K	Units	
Typical thermal resistance <sup>(1)</sup>	$R_{\theta JA}$ $R_{\theta JL}$	50 15							$^\circ\text{C/W}$

Notes:

(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.3 x 0.3" (8.0 x 8.0 mm) copper pad area

### Ratings and Characteristics Curves

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

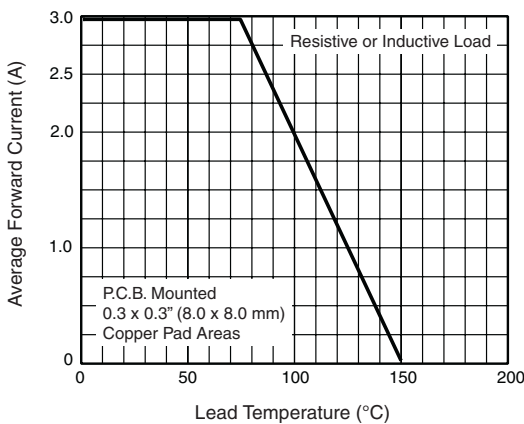


Figure 1. Forward Current Derating Curve

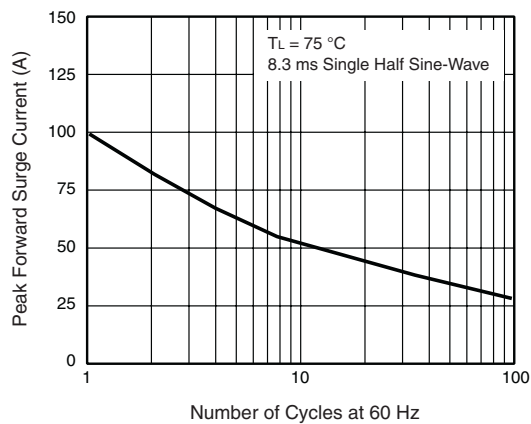


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

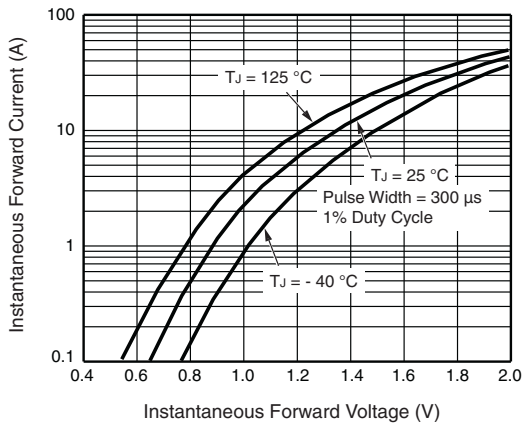


Figure 3. Typical Instantaneous Forward Characteristics

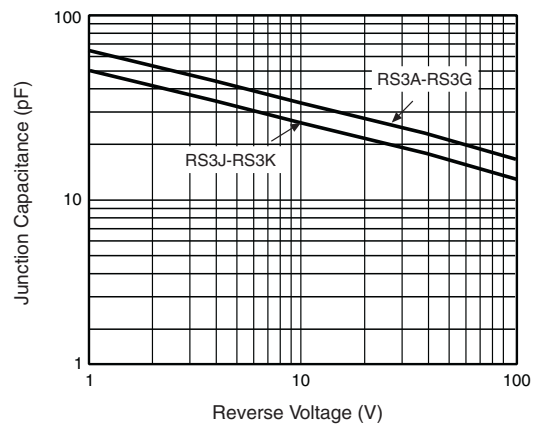


Figure 5. Typical Junction Capacitance

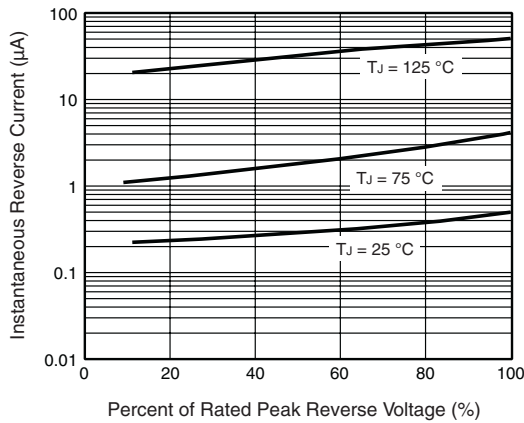


Figure 4. Typical Reverse Characteristics


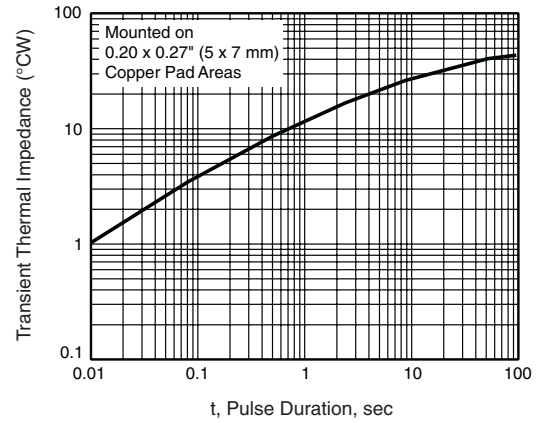


Figure 6. Typical Transient Thermal Impedance

## Package outline dimensions in inches (millimeters)



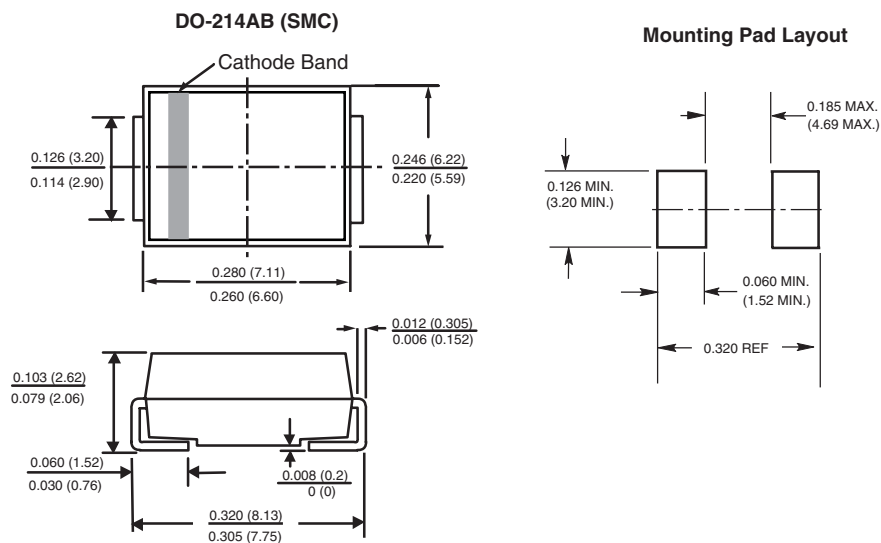

---

**Notice**

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.