

2.0mm (0.079") Pin Header

1205 Series





APPLICATION AND FEATURES

1. Standoffs facilitate post soldering clean.
2. Variable pin length, gold, selective gold or tin plated.
3. Mate with 2.0mm pitch P.C.Board
Female Connector and shunt connector such as 1215,1212,1213 & 1206 series.


SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40° to +105°C
 Contact Material: Phosphor bronze
 Insulator Material: Polyester, UL 94V-0

©Standard: P.P.S

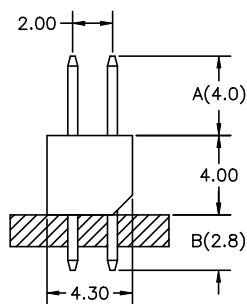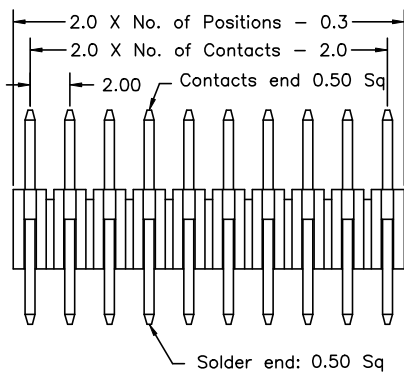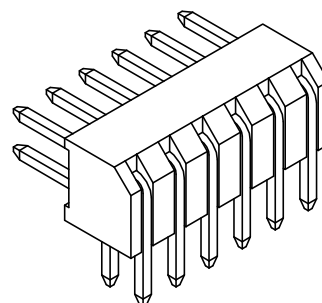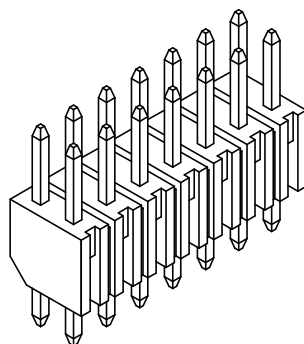


Type: "S1"

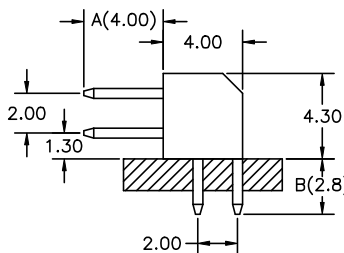

Type: "R"

Recommended P.C.Board
Hole Layout

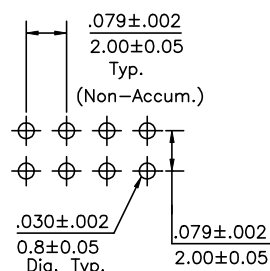

Order Information 1205 Series

Example: 1205 - 20 - S1 - 02 - A/B

Series No.	Number of Contacts	Connector Type		Contact Plating		Pin Length mm	
		Straight	Right Angle	Tin Plated	Gold Plated	A	B
1205	06 to 50 Contacts	4.0mm Bass	4.3mm Bass	01	02	4.0	2.8
				10	30		
				Flash			
				10 μ"			
				30 μ"			