


.100" (2.54mm) Low Profile Vertical Through Hole Dual Row Connectors (.100" x .100" Tails)

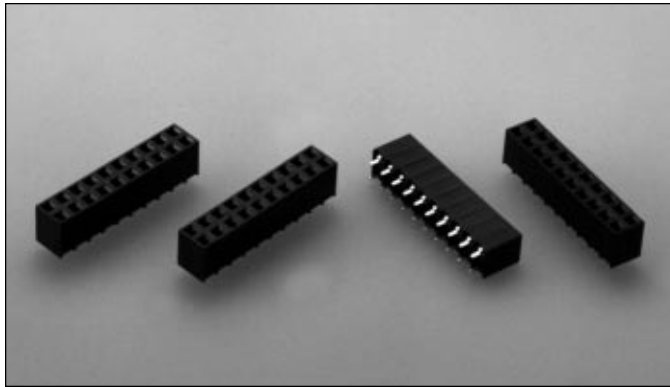

9000 SERIES "POST/BOXE"

PART NUMBER LEGEND






900X-4XX-30X

- TAIL CONFIGURATION 3 = .12 (3.05)
7 = .05 (1.37)
- NUMBER OF POSITIONS PER ROW 2-40
- CONTACT FINISH 0 = TIN
8 = .000030 SELECTIVE GOLD
F = .000015 SELECTIVE GOLD

MATING HEADERS: 9100 SERIES

NOTES:

- 1) INSULATOR MATERIAL:
900X: POLYESTER (PCT), 30% GLASS FILLED, UL 94V-0; COLOR: BLACK.
- 2) CONTACT MATERIAL: PHOSPHOR BRONZE.
- 3) CONTACT FINISH:
90X0: BRUTE TIN PLATE
90XB: .000050 NICKEL PLATE ALL OVER; .000030 SEL. GOLD PLATING AS INDICATED; .0001-0002 90/10 TIN/LEAD PLATING ON SOLDER TAIL
90XE: .000050 NICKEL PLATE ALL OVER; .000015 SEL. GOLD PLATING AS INDICATED; .0001-0002 90/10 TIN/LEAD PLATING ON SOLDER TAIL
90XP-4XX-303 ONLY: (POST-SHEAR PLATING) .000050 NICKEL PLATE ALL OVER; .000030 SEL. GOLD PLATING AS INDICATED; .0001-0002 90/10 TIN/LEAD PLATING ON SOLDER TAIL.
90XR-4XX-303 ONLY: (POST-SHEAR PLATING) .000050 NICKEL PLATE ALL OVER; .000015 SEL. GOLD PLATING AS INDICATED; .0001-0002 90/10 TIN/LEAD PLATING ON SOLDER TAIL.
- 4) END STANDOFFS ARE PRESENT ON P/N 90XX-402-30X ONLY. P/N 90XX-403-30X THRU 90XX-440-30X WILL NOT HAVE END STANDOFFS.
- 5) DIMENSIONS ARE IN IN./MM

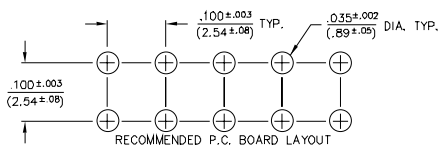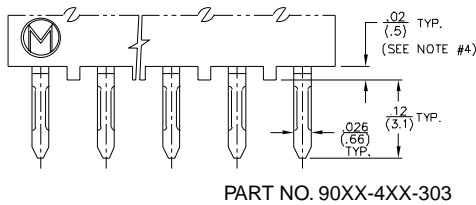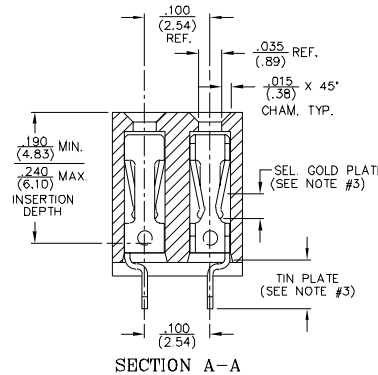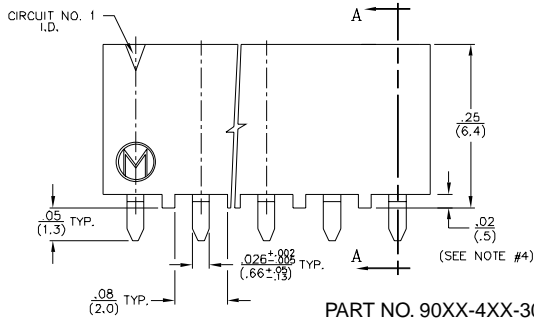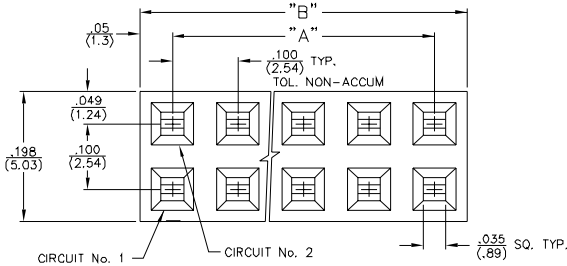

PART NO.	No. OF CIRCUITS	"DIM. A"	"DIM. B"
90XX-402-30X	4	.190 (4.83)	.20 (5.1)
↑-403-↑	6	.200 (5.08)	.20 (5.1)
-404-	8	.300 (7.62)	.20 (5.1)
-405-	10	.400 (10.16)	.20 (5.1)
-406-	12	.500 (12.70)	.20 (5.1)
-407-	14	.600 (15.24)	.20 (5.1)
-408-	16	.700 (17.78)	.20 (5.1)
-409-	18	.800 (20.32)	.20 (5.1)
-410-	20	.900 (22.86)	.20 (5.1)
-411-	22	1.000 (25.40)	.20 (5.1)
-412-	24	1.100 (27.94)	.20 (5.1)
-413-	26	1.200 (30.48)	.20 (5.1)
-414-	28	1.300 (33.02)	.20 (5.1)
-415-	30	1.400 (35.56)	.20 (5.1)
-416-	32	1.500 (38.10)	.20 (5.1)
-417-	34	1.600 (40.64)	.20 (5.1)
-418-	36	1.700 (43.18)	.20 (5.1)
-419-	38	1.800 (45.72)	.20 (5.1)
-420-	40	1.900 (48.26)	.20 (5.1)
-421-	42	2.000 (50.80)	.20 (5.1)
-422-	44	2.100 (53.34)	.20 (5.1)
-423-	46	2.200 (55.88)	.20 (5.1)
-424-	48	2.300 (58.42)	.20 (5.1)
-425-	50	2.400 (60.96)	.20 (5.1)
-426-	52	2.500 (63.50)	.20 (5.1)
-427-	54	2.600 (66.04)	.20 (5.1)
-428-	56	2.700 (68.58)	.20 (5.1)
-429-	58	2.800 (71.12)	.20 (5.1)
-430-	60	2.900 (73.66)	.20 (5.1)
-431-	62	3.000 (76.20)	.20 (5.1)
-432-	64	3.100 (78.74)	.20 (5.1)
-433-	66	3.200 (81.28)	.20 (5.1)
-434-	68	3.300 (83.82)	.20 (5.1)
-435-	70	3.400 (86.36)	.20 (5.1)
-436-	72	3.500 (88.90)	.20 (5.1)
-437-	74	3.600 (91.44)	.20 (5.1)
-438-	76	3.700 (93.98)	.20 (5.1)
-439-	78	3.800 (96.52)	.20 (5.1)
90XX-440-30X	80	3.900 (99.06)	.20 (5.1)

ADDITIONAL SPECIFICATIONS