


1 2 3 4 5 6 7

A

A

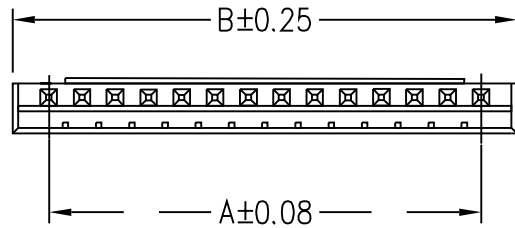


B

B

Circuits	Dimension mm	
	A	B
2	2.0	6.0
3	4.0	8.0
4	6.0	10.0
5	8.0	12.0
6	10.0	14.0
7	12.0	16.0
8	14.0	18.0
9	16.0	20.0
10	18.0	22.0
11	20.0	24.0
12	22.0	26.0
13	24.0	28.0
14	26.0	30.0
15	28.0	32.0
16	30.0	34.0

C

C

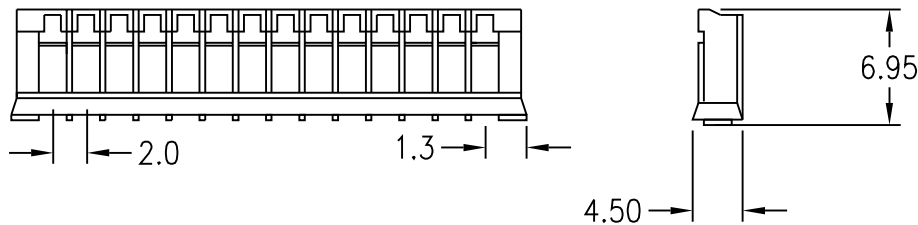

Features:

- \* Available in 2 through 16 circuits
- \* Nylon 66 UL94V-0

Specifications:



- \* Pitch between poles 2.0mm
- \* Rated Voltage 250v AC,DC
- \* Rated Current 2A AC,DC
- \* Withstand Voltage 800V AC/Minute
- \* Insulation Resistance 1,000M $\Omega$ /min
- \* Temperature Range -25~85 °C
- \* TOLERANCE  $\pm 0.2$

D

D

E

E

 <b>易昕企業有限公司</b> LEAMAX ENTERPRISE CO., LED.					
PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO <b>4320-H</b>		
APP			MODEL	FILE NO	REV.
CHK	CCJ	91.02.22	PITCH:2.00mm	HOUSING	X1
DGN	AMY	91.02.22	UNIT	SHT 1 OF 1	SIZE
DRW	SHIEH	91.02.22	MM		A4

1 2 3 4 5 6 7