


**FEMALE HEADER „THROUGH HOLE“**

**ID: 100**


BL 1-XXF / BL 2-XXF / BL 3-XXF

Series 401

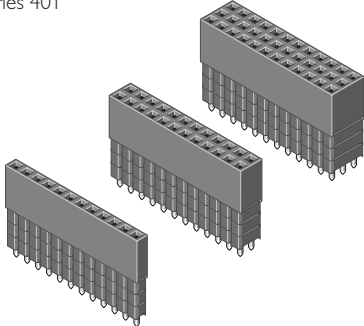

**TECHNICAL DATA**

Pitch	2,54 mm
Insulating Material	high temp. thermoplast UL94V-0
Contact Material	phosphor bronze
Rated Current	3 Amp.
Rated Voltage	250 V <sub>AC/DC</sub>
Withstanding Voltage	1000 V <sub>AC</sub> for one minute
Operating Temperature	-40°C to +105°C
Maximum Soldering Temperature	260°C for 10 seconds

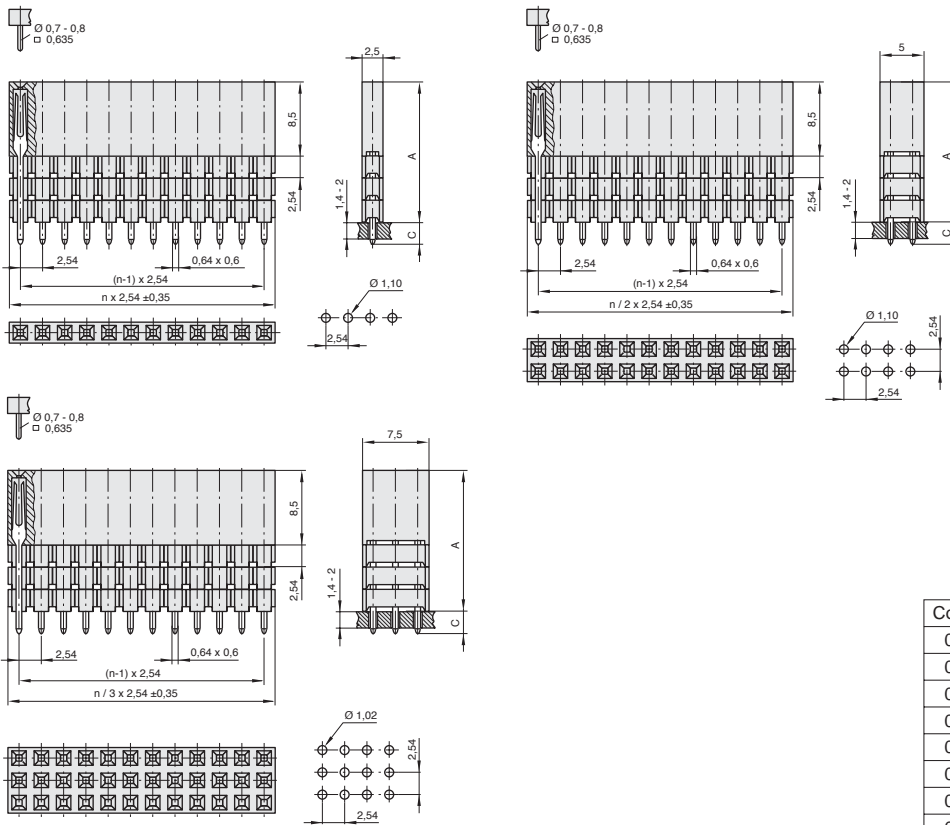

Code	A	C
01	11,05	2,30
02	11,05	7,35
03	13,59	4,85
04	16,13	2,30
06	11,05	12,20
07	13,59	9,65
08	16,13	7,10
09	18,67	4,60

All dimensions in mm.  
Other dimensions upon request.

