
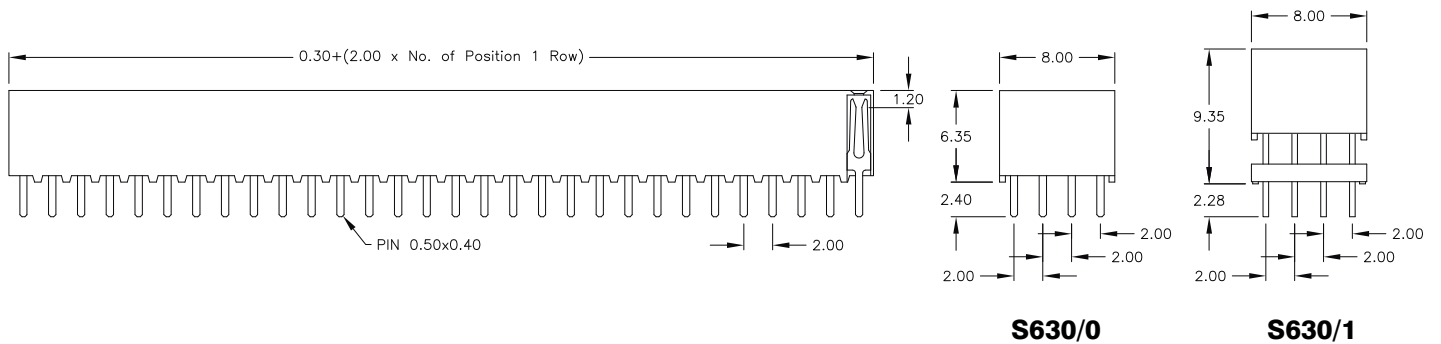
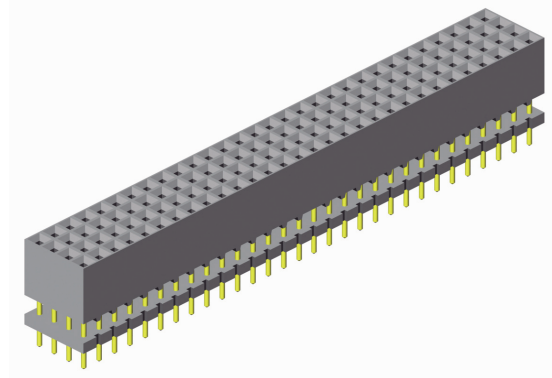


2.00mm pitch Female Header - THT -
 "PC 104+ Type" Quad Row, 120 contacts max.

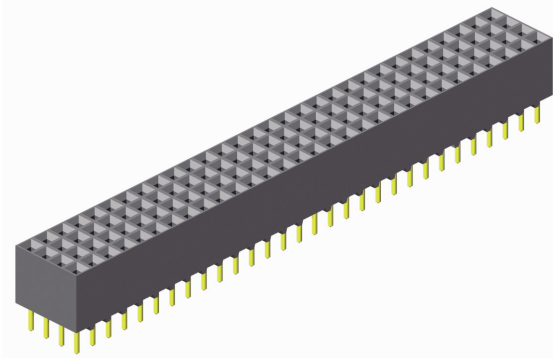


S630/0

S630/1

SPECIFICATIONS

Current rating	1 A
Insulator resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Contact material <i>(RoHS compliant)</i>	Phosphor Bronze
Insulator material <i>(RoHS compliant)</i>	Nylon UL 94 V-0

PCB Hole Layout

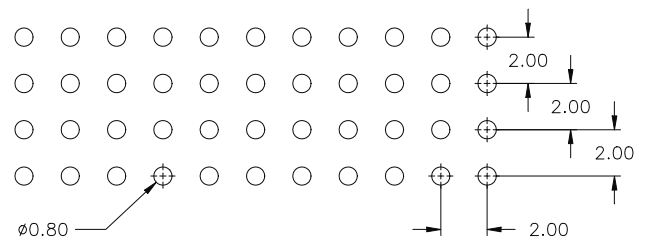

APPLICATION AND FEATURES

- Low and high Profile PC/104-Plus Type
- Designed for "board to board" small spacing interconnection
- With standoff's for post solder cleaning
- Mate with pin header SL4 - xxx - S830/x - xx/2

How to order

BL4 - xxx - S xxx/x - 55 /2

