




# 2SA1012

## PNP SILICON TRANSISTOR

### HIGH CURRENT SWITCHING APPLICATION

■ FEATURES

- \*Low Collector Saturation Voltage  
 $V_{CE(SAT)} = -0.4V(\text{max.})$  At  $I_c = -3A$
- \*High Speed Switching Time:  $t_s = 1.0\mu s(\text{Typ.})$
- \*Complementary To 2SC2562

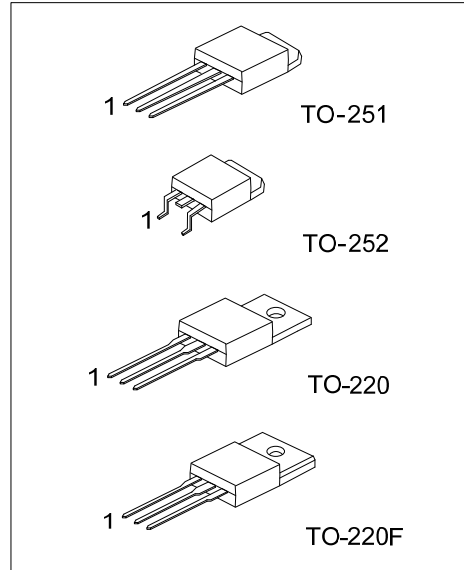

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free Plating	Halogen Free		1	2	3	
2SA1012L-x-TA3-T	2SA1012G-x-TA3-T	TO-220	B	C	E	Tube
2SA1012L-x-TF3-T	2SA1012G-x-TF3-T	TO-220F	B	C	E	Tube
2SA1012L-x-TM3-T	2SA1012G-x-TM3-T	TO-251	B	C	E	Tube
2SA1012L-x-TN3-R	2SA1012G-x-TN3-R	TO-252	B	C	E	Tape Reel
2SA1012L-x-TN3-T	2SA1012G-x-TN3-T	TO-252	B	C	E	Tube

<p>2SA1012L-x-TA3-T</p> <p>(1) Packing Type (2) Package Type (3) Rank (4) Lead Plating</p>	<p>(1) T: Tube, R: Tape Reel (2) TA3: TO-220, TF3: TO-220F, TM3: TO-251, TN3: TO-252 (3) x: reference to Classification of <math>h_{FE1}</math> (4) L: Lead Free Plating, G: Halogen Free</p>
--	---

■ ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ )

PARAMETER	SYMBOL	RATINGS	UNIT
Collector-Base Voltage	$V_{CBO}$	-60	V
Collector-Emitter Voltage	$V_{CEO}$	-50	V
Collector-Emitter Voltage	$V_{EBO}$	-5	V
Peak Collector Current	$I_C$	-5	A
Power Dissipation	$P_D$	25	W
Junction Temperature	$T_J$	150	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-55 ~ +150	$^\circ\text{C}$

Note Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.







■ ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ , unless otherwise specified.)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage		$BV_{CBO}$	$I_C = -100\mu\text{A}, I_E = 0$	-60			V
Collector-Emitter Breakdown Voltage		$BV_{CEO}$	$I_C = -10\text{mA}, I_B = 0$	-50			V
Emitter-Base Breakdown Voltage		$BV_{EBO}$	$I_E = -100\mu\text{A}, I_C = 0$	-5			V
Collector Cut-off Current		$I_{CBO}$	$V_{CB} = -50\text{V}, I_E = 0$			-1.0	$\mu\text{A}$
Emitter Cut-off Current		$I_{EBO}$	$V_{EB} = -5\text{V}, I_C = 0$			-1.0	$\mu\text{A}$
DC Current Gain	$h_{FE1}$		$V_{CE} = -1\text{V}, I_C = -1\text{A}$	70		360	
	$h_{FE2}$		$V_{CE} = -1\text{V}, I_C = -3\text{A}$	30			
Collector-Emitter Saturation Voltage		$V_{CE(SAT)}$	$I_C = -3\text{A}, I_B = -0.15\text{A}$		-0.2	-0.4	V
Base-Emitter Saturation Voltage		$V_{BE(SAT)}$	$I_C = -3\text{A}, I_B = -0.15\text{A}$		-0.9	-1.2	V
Transition frequency		$f_T$	$V_{CE} = -4\text{V}, I_C = -1\text{A}$		60		MHz
Collector output capacitance		$C_{ob}$	$V_{CB} = -10\text{V}, I_E = 0, f = 1\text{MHz}$		170		pF
Switching time	Turn-on time	$t_{ON}$			0.1		$\mu\text{s}$
	Storage time	$t_S$			1.0		$\mu\text{s}$
	Fall time	$t_F$				0.1	





■ CLASSIFICATION of  $h_{FE1}$

RANK	O	Y	R	R1
RANGE	70 ~ 140	120 ~ 240	180 ~ 360	>255

## ■ TYPICAL CHARACTERISTICS

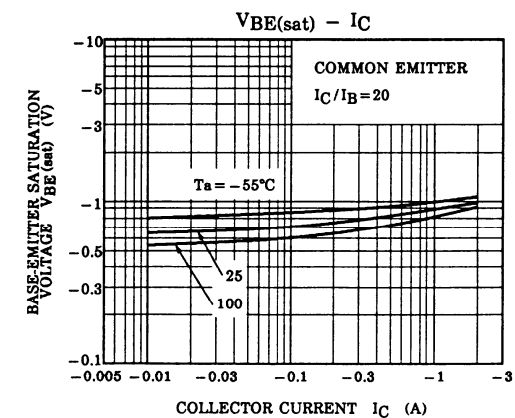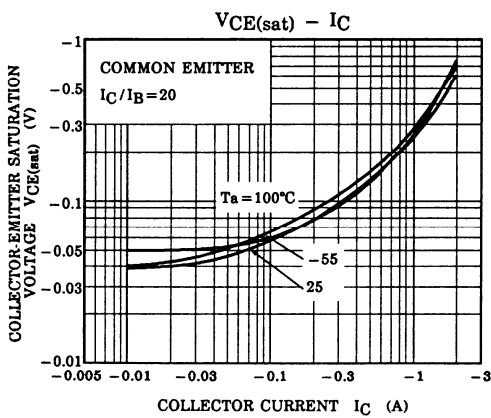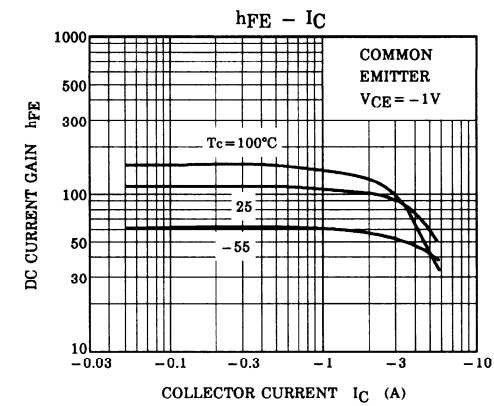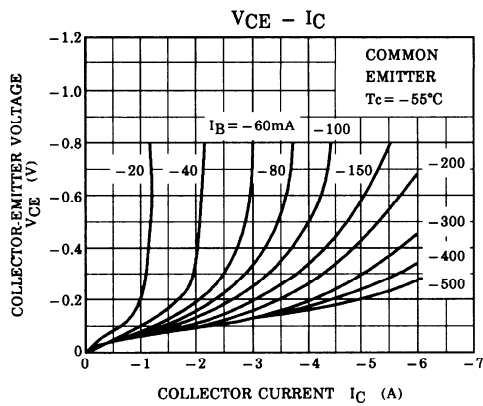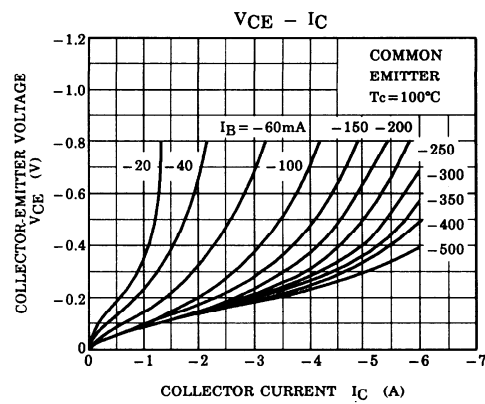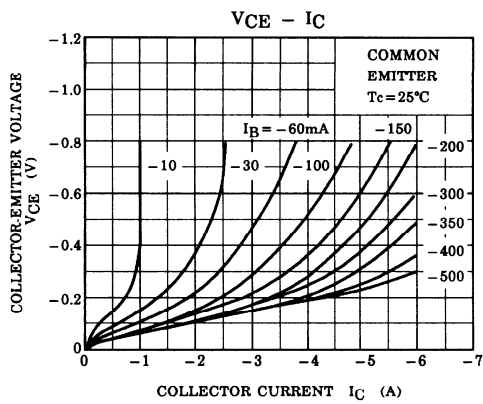

## ■ TYPICAL CHARACTERISTICS (Cont.)

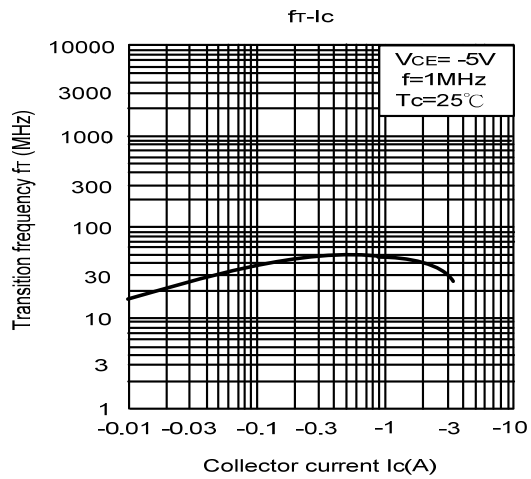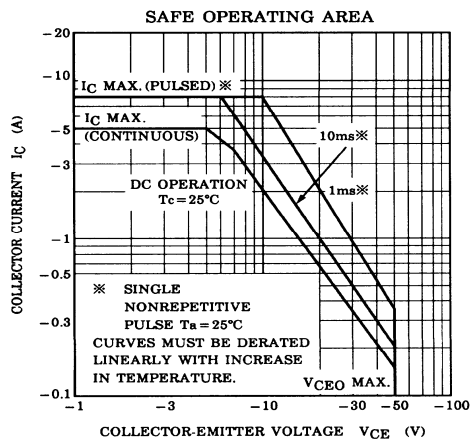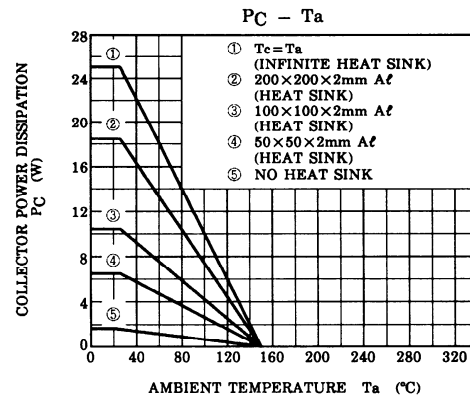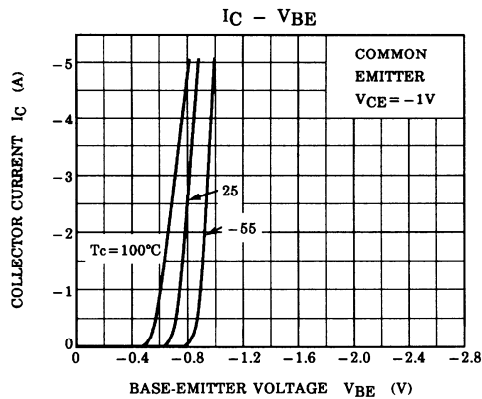

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.