




Dual Low VF Schottky Rectifier

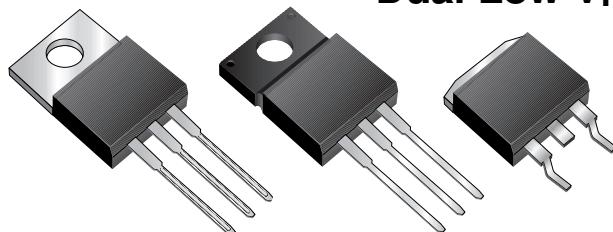

TO-220AB (SBL25LxxCT)

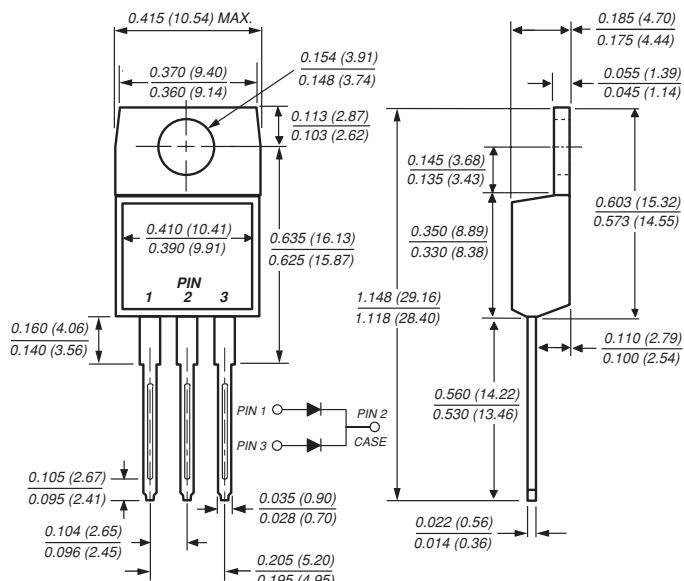

Mounting Pad Layout TO-263AB

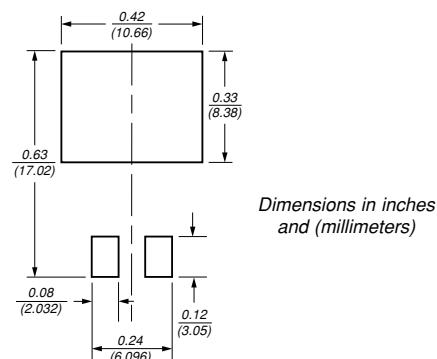


Features


- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Dual rectifier construction, positive center tap
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- Guardring for overvoltage protection
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 250°C/10 seconds, 0.25" (6.35mm) from case

Reverse Voltage 20 to 30V
Forward Current 25A

ITO-220AB (SBLF25LxxCT)

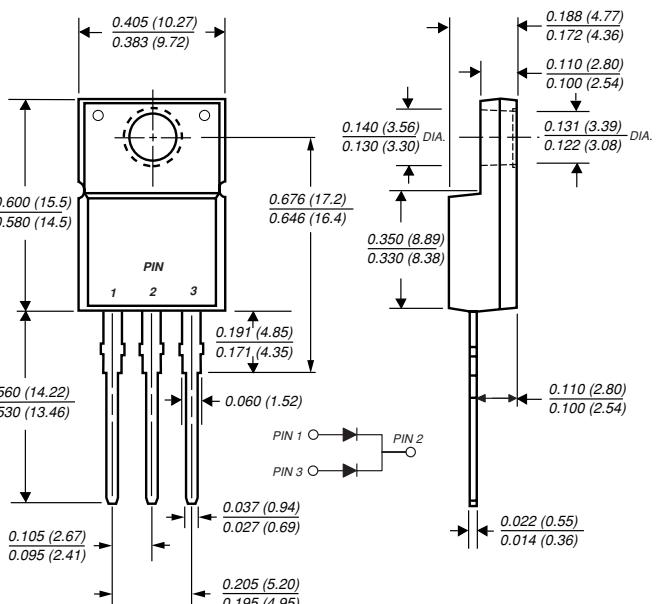

TO-263AB (SBLB25LxxCT)

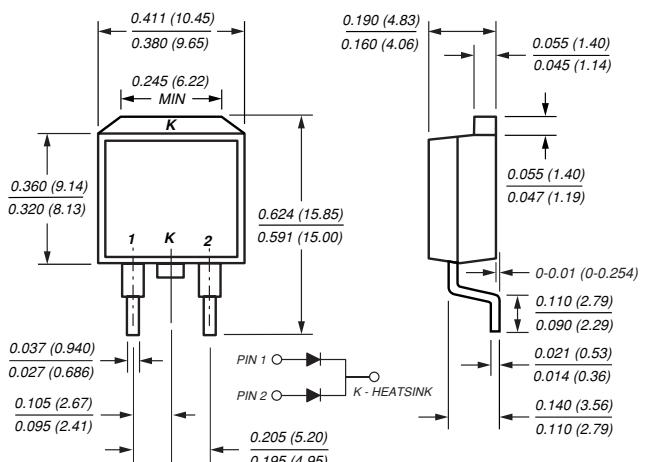

Mechanical Data

Case: JEDEC TO-220AB, ITO-220AB & TO-263AB molded plastic body

Terminals: Plated leads, solderable per MIL-STD-750, Method 2026

Polarity: As marked

Mounting Position: Any

Mounting Torque: 10 in-lbs maximum

Weight: 0.08 oz., 2.24 g

Maximum Ratings ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	SBL25L20CT	SBL25L25CT	SBL25L30CT	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	20	25	30	V
Working peak reverse voltage	V_{RWM}	14	17	21	V
Maximum DC blocking voltage	V_{DC}	20	25	30	V
Maximum average forward rectified current at $T_c = 95^\circ\text{C}$ <i>Total device per leg</i>	$I_{F(AV)}$		25 12.5		A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) per leg	I_{FSM}		180		A
Operating junction and storage temperature range	T_J, T_{STG}		-55 to +150		$^\circ\text{C}$
RMS Isolation voltage (SBLF type only) from terminals to heatsink with $t = 1.0$ second, $\text{RH} \leq 30\%$	V_{ISOL}		4500 (NOTE 1) 3500 (NOTE 2) 1500 (NOTE 3)		V

Electrical Characteristics ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value		Unit
Maximum instantaneous forward voltage per leg at 12.5A (NOTE 4)	V_F	0.39 0.49		V
Maximum instantaneous reverse current at rated DC blocking voltage per leg (NOTE 4)	I_R	0.90 50 100		mA

Thermal Characteristics ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	SBL	SBLF	SBLB	Unit
Typical thermal resistance from junction to case per leg	$R_{\Theta JC}$	1.5	4.0	1.5	$^\circ\text{C/W}$

Notes:

- (1) Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset
- (2) Clip mounting (on case), where leads do overlap heatsink
- (3) Screw mounting with 4-40 screw, where washer diameter is ≤ 4.9 mm (0.19")
- (4) Pulse test: 300μs pulse width, 1% duty cycle

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Forward Current Derating Curve

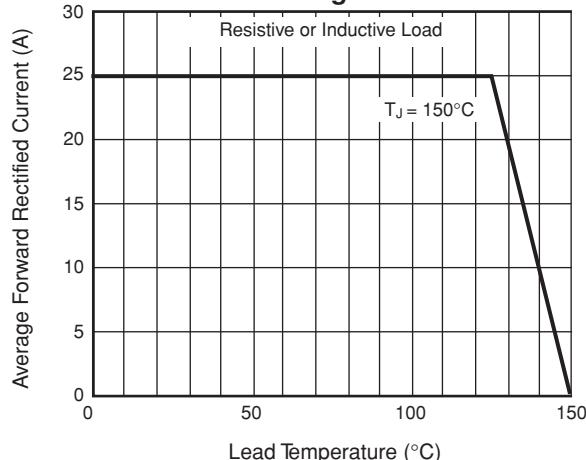


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current Per Leg

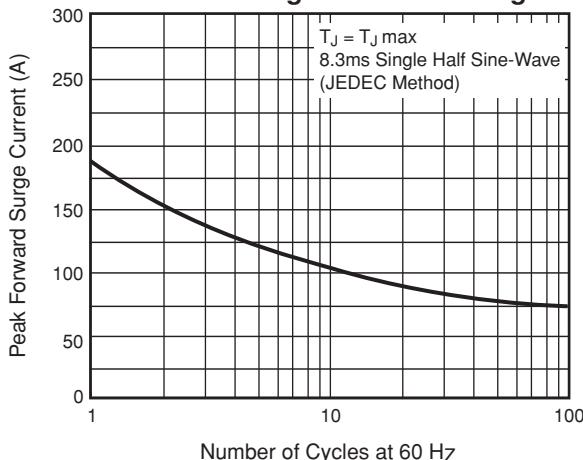


Fig. 3 – Typical Instantaneous Forward Characteristics Per Leg

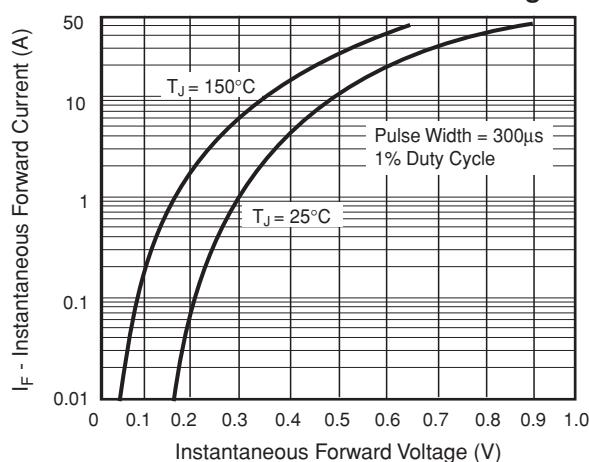


Fig. 4 – Typical Reverse Characteristics Per Leg

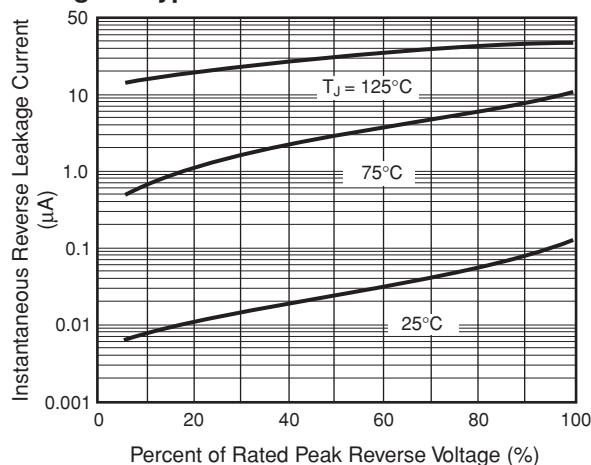


Fig. 5 – Typical Junction Capacitance Per Leg


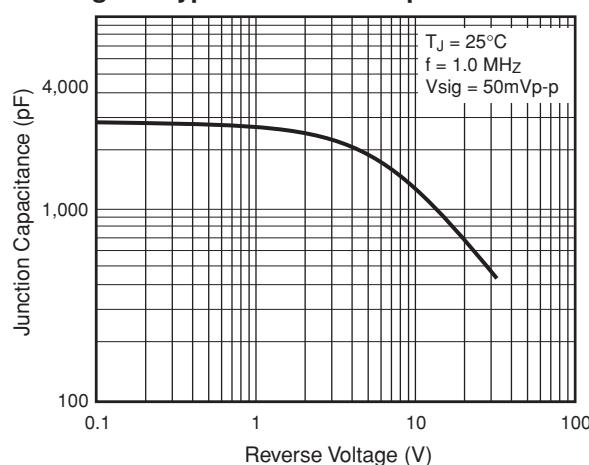


Fig. 6 – Typical Transient Thermal Impedance Per Leg



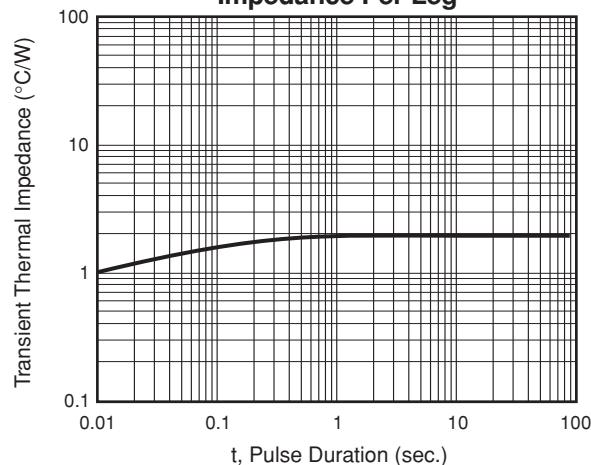

Legal Disclaimer Notice

Vishay

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.