


SN54ALS174, SN54ALS175, SN54AS174, SN54AS175B SN74ALS174, SN74ALS175, SN74AS174, SN74AS175B HEX/QUADRUPLE D-TYPE FLIP-FLOPS WITH CLEAR


SDAS207D - APRIL 1982 - REVISED MAY 1996

- 'ALS174 and 'AS174 Contain Six Flip-Flops With Single-Rail Outputs
- 'ALS175 and 'AS175B Contain Four Flip-Flops With Double-Rail Outputs
- Buffered Clock and Direct-Clear Inputs
- Applications Include:
 - Buffer/Storage Registers
 - Shift Registers
 - Pattern Generators
- Fully Buffered Outputs for Maximum Isolation From External Disturbances ('AS Only)
- Package Options Include Plastic Small-Outline (D) Packages, Ceramic Chip Carriers (FK), and Standard Plastic (N) and Ceramic (J) 300-mil DIPs


SN54ALS174, SN54AS174 . . . J PACKAGE
SN74ALS174, SN74AS174 . . . D OR N PACKAGE
(TOP VIEW)




SN54ALS175, SN54AS175B . . . J PACKAGE
SN74ALS175, SN74AS175B . . . D OR N PACKAGE
(TOP VIEW)



SN54ALS174, SN54AS174 . . . FK PACKAGE
(TOP VIEW)

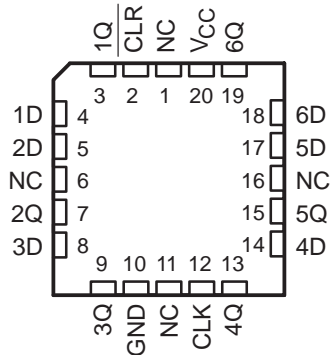

SN54ALS175A, SN54AS175B . . . FK PACKAGE
(TOP VIEW)

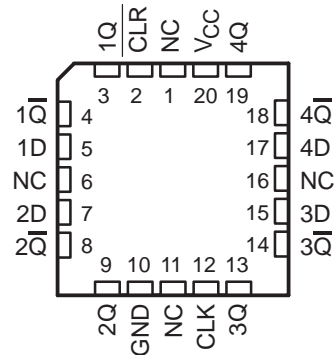

NC – No internal connection

description

These positive-edge-triggered flip-flops utilize TTL circuitry to implement D-type flip-flop logic. All have a direct-clear ($\overline{\text{CLR}}$) input. The 'ALS175 and 'AS175B feature complementary outputs from each flip-flop.

Information at the data (D) inputs meeting the setup-time requirements is transferred to the outputs on the positive-going edge of the clock pulse. Clock triggering occurs at a particular voltage level and is not directly related to the transition time of the positive-going pulse. When the clock (CLK) input is at either the high or low level, the D-input signal has no effect at the output.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

 **TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1996, Texas Instruments Incorporated

SN54ALS174, SN54ALS175, SN54AS174, SN54AS175B SN74ALS174, SN74ALS175, SN74AS174, SN74AS175B HEX/QUADRUPLE D-TYPE FLIP-FLOPS WITH CLEAR

SDAS207D - APRIL 1982 - REVISED MAY 1996

description (continued)

These circuits are fully compatible for use with most TTL circuits.


The SN54ALS174, SN54ALS175, SN54AS174, and SN54AS175B are characterized for operation over the full military temperature range of -55°C to 125°C . The SN74ALS174, SN74ALS175, SN74AS174, and SN74AS175B are characterized for operation from 0°C to 70°C .

FUNCTION TABLE
(each flip-flop)

INPUTS			OUTPUTS	
CLR	CLK	D	Q	\bar{Q}^{\dagger}
L	X	X	L	H
H	\uparrow	H	H	L
H	\uparrow	L	L	H
H	L	X	Q_0	\bar{Q}_0

\dagger 'ALS175 and 'AS175B only

logic symbols \ddagger


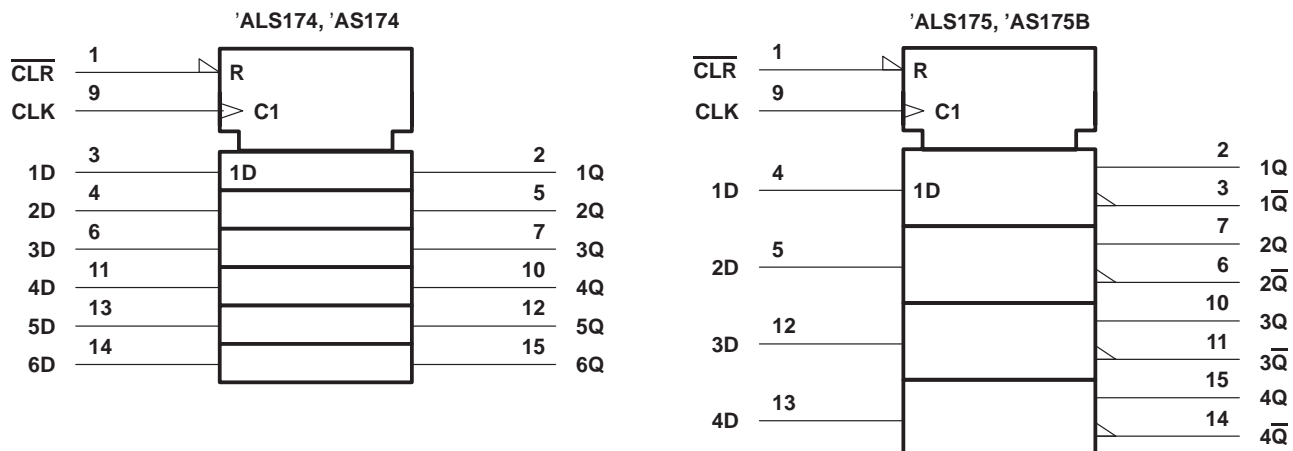


\ddagger These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12. Pin numbers shown are for the D, J, and N packages.

SN54ALS174, SN54ALS175, SN54AS174, SN54AS175B
 SN74ALS174, SN74ALS175, SN74AS174, SN74AS175B
 HEX/QUADRUPLE D-TYPE FLIP-FLOPS WITH CLEAR

SDAS207D - APRIL 1982 - REVISED MAY 1996

logic diagrams (positive logic)

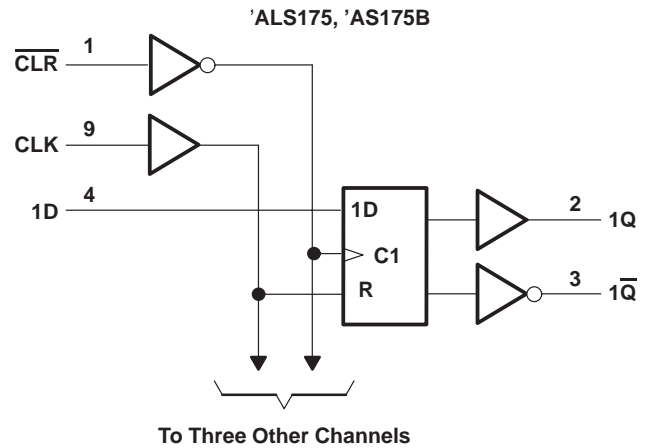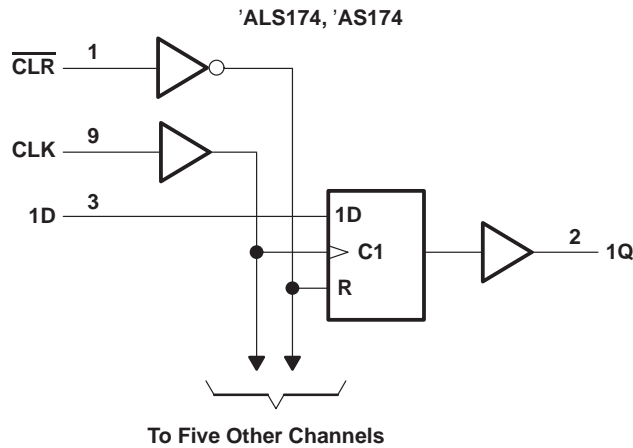

Pin numbers shown are for the D, J, and N packages.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage, V_{CC}	7 V
Input voltage, V_I	7 V
Operating free-air temperature range, T_A : SN54ALS174, SN54ALS175	-55°C to 125°C
SN74ALS174, SN74ALS175	0°C to 70°C
Storage temperature range, T_{stg}	-65°C to 150°C

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

recommended operating conditions

		SN54ALS174 SN54ALS175			SN74ALS174 SN74ALS175			UNIT	
		MIN	NOM	MAX	MIN	NOM	MAX		
V_{CC}	Supply voltage	4.5	5	5.5	4.5	5	5.5	V	
V_{IH}	High-level input voltage	2			2			V	
V_{IL}	Low-level input voltage			0.8			0.8	V	
I_{OH}	High-level output current			-0.4			-0.4	mA	
I_{OL}	Low-level output current			4			8	mA	
f_{clock}	Clock frequency	0		40	0		50	MHz	
t_w	Pulse duration	CLR low		15			10	ns	
		CLK high		12.5			10		
		CLK low		12.5			10		
t_{su}	Setup time before CLK↑	Data		15			10	ns	
		CLR inactive		8			6		
t_h	Hold time, data after CLK↑	0			0			ns	
T_A	Operating free-air temperature			-55		125		70	°C



**SN54ALS174, SN54ALS175, SN54AS174, SN54AS175B
SN74ALS174, SN74ALS175, SN74AS174, SN74AS175B
HEX/QUADRUPLE D-TYPE FLIP-FLOPS WITH CLEAR**

SDAS207D - APRIL 1982 - REVISED MAY 1996

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS		SN54ALS174 SN54ALS175			SN74ALS174 SN74ALS175			UNIT
			MIN	TYP†	MAX	MIN	TYP†	MAX	
V _{IK}	V _{CC} = 4.5 V, I _I = -18 mA		-1.5			-1.5			V
V _{OH}	V _{CC} = 4.5 V to 5.5 V, I _{OH} = -0.4 mA		V _{CC} -2			V _{CC} -2			V
V _{OL}	V _{CC} = 4.5 V	I _{OL} = 4 mA	0.25		0.4	0.25		0.4	V
		I _{OL} = 8 mA				0.35		0.5	
I _I	V _{CC} = 5.5 V,	V _I = 7 V	0.1			0.1			mA
I _{IH}	V _{CC} = 5.5 V,	V _I = 2.7 V	20			20			μA
I _{IL}	V _{CC} = 5.5 V,	V _I = 0.4 V	-0.1			-0.1			mA
			-0.15						
I _{O‡}	V _{CC} = 5.5 V,	V _O = 2.25 V	-20	-112		-30	-112		mA
I _{CC}	'ALS174	V _{CC} = 5.5 V, See Note 1	11		19	11		19	mA
	'ALS175		8		14	9		14	

† All typical values are at V_{CC} = 5 V, T_A = 25°C.

‡ The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, I_{OS}.

NOTE 1: I_{CC} is measured with D inputs and CLR grounded, and CLK at 4.5 V.

switching characteristics (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC} = 4.5 V to 5.5 V, C _L = 50 pF, R _L = 500 Ω, T _A = MIN to MAX§				UNIT	
			SN54ALS174 SN54ALS175		SN74ALS174 SN74ALS175			
			MIN	MAX	MIN	MAX		
f _{max}			40		50		MHz	
t _{PLH}	$\overline{\text{CLR}}$	Any $\overline{\text{Q}}$ ('ALS175) Any Q	3		20	5		ns
t _{PHL}			5		30	8		
t _{PLH}	CLK	Any Q (or Q, 'ALS175)	3		20	3		ns
t _{PHL}			5		24	5		

§ For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.



**SN54ALS174, SN54ALS175, SN54AS174, SN54AS175B
SN74ALS174, SN74ALS175, SN74AS174, SN74AS175B
HEX/QUADRUPLE D-TYPE FLIP-FLOPS WITH CLEAR**

SDAS207D - APRIL 1982 - REVISED MAY 1996

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage, V_{CC}	7 V
Input voltage, V_I	7 V
Operating free-air temperature range, T_A : SN54AS174, SN54AS175B	-55°C to 125°C
SN74AS174, SN74AS175B	0°C to 70°C
Storage temperature range, T_{stg}	-65°C to 150°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

recommended operating conditions

		SN54AS174 SN54AS175B			SN74AS174 SN74AS175B			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V_{CC}	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
V_{IH}	High-level input voltage	2			2			V
V_{IL}	Low-level input voltage			0.8			0.8	V
I_{OH}	High-level output current			-2			-2	mA
I_{OL}	Low-level output current			20			20	mA
f_{clock}^*	Clock frequency	0		100	0		100	MHz
t_w^*	Pulse duration	CLR low		5.5	5		ns	
		CLK high		4	4			
		CLK low	'AS174	6	6			
			'AS175B	5	5			
t_{su}^*	Setup time before CLK↑	Data	'AS174	4	4		ns	
			'AS175B	3	3			
		CLR inactive		6	6			
t_h^*	Hold time, data after CLK↑	1			1			ns
T_A	Operating free-air temperature	-55		125	0		70	°C

* On products compliant to MIL-STD-883, Class B, this parameter is based on characterization data but is not production tested.



**SN54ALS174, SN54ALS175, SN54AS174, SN54AS175B
SN74ALS174, SN74ALS175, SN74AS174, SN74AS175B
HEX/QUADRUPLE D-TYPE FLIP-FLOPS WITH CLEAR**

SDAS207D - APRIL 1982 - REVISED MAY 1996

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	SN54AS174 SN54AS175B		SN74AS174 SN74AS175B		UNIT	
		MIN	TYP†	MAX	MIN		TYP†
V _{IK}	V _{CC} = 4.5 V, I _I = -18 mA			-1.2		-1.2	V
V _{OH}	V _{CC} = 4.5 V to 5.5 V, I _{OH} = -2 mA	V _{CC} -2		V _{CC} -2		V	
V _{OL}	V _{CC} = 4.5 V, I _{OL} = 20 mA	0.35	0.5	0.35	0.5	V	
I _I	V _{CC} = 5.5 V, V _I = 7 V		0.1		0.1	mA	
I _{IH}	V _{CC} = 5.5 V, V _I = 2.7 V		20		20	μA	
I _{IL}	V _{CC} = 5.5 V, V _I = 0.4 V		-0.5		-0.5	mA	
I _O ‡	V _{CC} = 5.5 V, V _O = 2.25 V	-30	-112	-30	-112	mA	
I _{CC}	V _{CC} = 5.5 V, See Note 2	'AS174		'AS174		mA	
		'AS175B		'AS175B			
		30	45	30	45		
		22.5	34	22.5	34		

† All typical values are at V_{CC} = 5 V, T_A = 25°C.

‡ The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, I_{OS}.

NOTE 2: I_{CC} is measured with D inputs, CLR, and CLK grounded.

switching characteristics (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC} = 4.5 V to 5.5 V, C _L = 50 pF, R _L = 500 Ω, T _A = MIN to MAX§				UNIT
			SN54AS174		SN74AS174		
			MIN	MAX	MIN	MAX	
f _{max} *			100		100	MHz	
t _{PHL}	CLR	Any Q	5	15	5	14	ns
t _{PLH}	CLK	Any Q	3.5	9.5	3.5	8	ns
t _{PHL}			4.5	11.5	4.5	10	

* On products compliant to MIL-STD-883, Class B, these parameters are based on characterization data but are not production tested.

§ For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

switching characteristics (see Figure 1)


PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC} = 4.5 V to 5.5 V, C _L = 50 pF, R _L = 500 Ω, T _A = MIN to MAX§				UNIT
			SN54AS175B		SN74AS175B		
			MIN	MAX	MIN	MAX	
f _{max} *			100		100	MHz	
t _{PLH}	CLR	Any Q or Q̄	4	10	4	9	ns
t _{PHL}			4.5	15	4.5	13	
t _{PLH}	CLK	Any Q or Q̄	3	8.5	3	7.5	ns
t _{PHL}			3	11	3	10	

* On products compliant to MIL-STD-883, Class B, this parameter is based on characterization data but is not production tested.

§ For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.



PARAMETER MEASUREMENT INFORMATION
 SERIES 54ALS/74ALS AND 54AS/74AS DEVICES

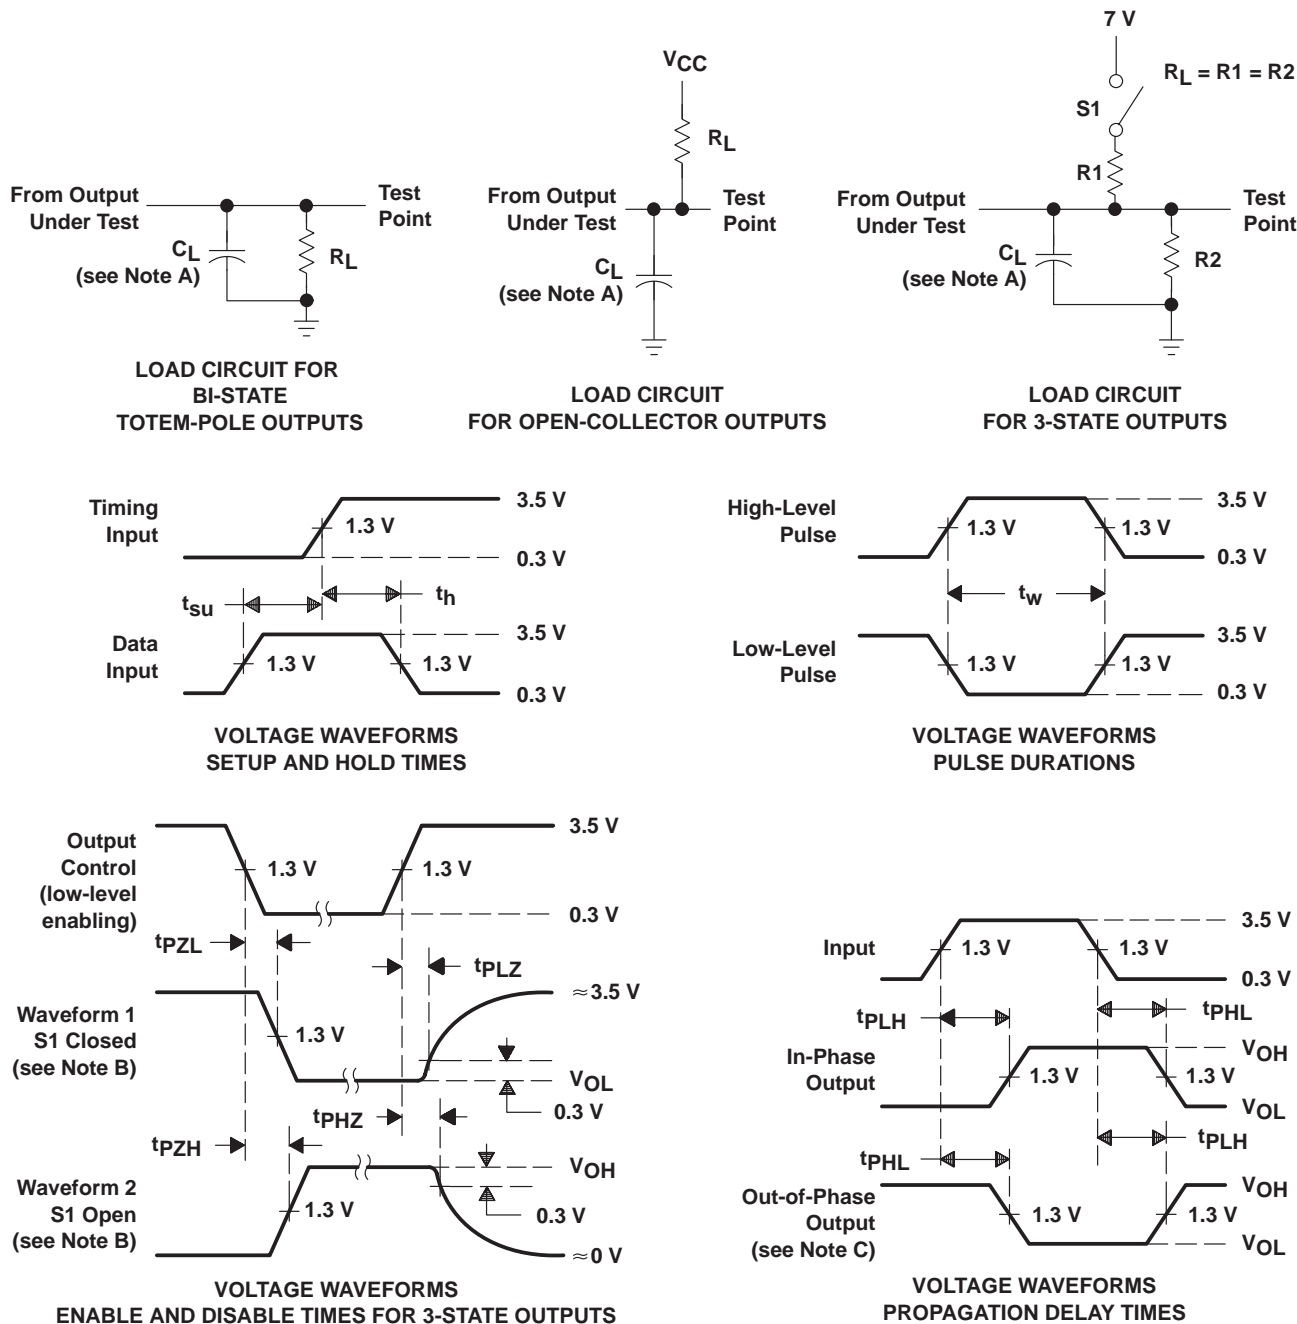

- NOTES: A. C_L includes probe and jig capacitance.
 B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
 C. When measuring propagation delay items of 3-state outputs, switch S1 is open.
 D. All input pulses have the following characteristics: $PRR \leq 1$ MHz, $t_r = t_f = 2$ ns, duty cycle = 50%.
 E. The outputs are measured one at a time with one transition per measurement.

Figure 1. Load Circuits and Voltage Waveforms

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.



Products

Development Tools

Applications

Search

 Advanced Search TI Home TI&ME Employment Tech Support Comments Site Map TI Global[>> Semiconductor Home](#) > [Products](#) > [Digital Logic](#) > [Flip-Flops](#) > [D-Type Flip-Flops](#) >

SN54ALS174, HEX D-TYPE FLIP-FLOPS WITH CLEAR

Device Status: Active

- > [Description](#)
- > [Features](#)
- > [Datasheets](#)
- > [Pricing/Samples/Availability](#)
- > [Application Notes](#)
- > [Related Documents](#)

Parameter Name	SN54ALS174
Voltage Nodes (V)	5
Vcc range (V)	4.5 to 5.5
Input Level	TTL
Output Level	TTL
Output	2S
No. of Bits	6

Description

These positive-edge-triggered flip-flops utilize TTL circuitry to implement D-type flip-flop logic. All have a direct-clear ($\overline{\text{CLR}}$) input. The 'ALS175 and 'AS175B feature complementary outputs from each flip-flop.

Information at the data (D) inputs meeting the setup-time requirements is transferred to the outputs on the positive-going edge of the clock pulse. Clock triggering occurs at a particular voltage level and is not directly related to the transition time of the positive-going pulse. When the clock (CLK) input is at either the high or low level, the D-input signal has no effect at the output.

These circuits are fully compatible for use with most TTL circuits.

The SN54ALS174, SN54ALS175, SN54AS174, and SN54AS175B are characterized for operation over the full military temperature range of -55°C to 125°C . The SN74ALS174, SN74ALS175, SN74AS174, and SN74AS175B are characterized for operation from 0°C to 70°C .

Features

- 'ALS174 and 'AS174 Contain Six Flip-Flops With Single-Rail Outputs
- 'ALS175 and 'AS175B Contain Four Flip-Flops With Double-Rail Outputs
- Buffered Clock and Direct-Clear Inputs
- Applications Include:
 - Buffer/Storage Registers
 - Shift Registers
 - Pattern Generators
- Fully Buffered Outputs for Maximum Isolation From External Disturbances ('AS Only)
- Package Options Include Plastic Small-Outline (D) Packages, Ceramic Chip Carriers (FK), and Standard Plastic (N) and Ceramic (J) 300-mil DIPs

To view the following documents, [Acrobat Reader 3.x](#) is required.

To download a document to your hard drive, right-click on the link and choose 'Save'.

Datasheets

Full datasheet in Acrobat PDF: [sdas207d.pdf](#) (127 KB)

Full datasheet in Zipped PostScript: [sdas207d.psz](#) (123 KB)

Pricing/Samples/Availability

Orderable Device	Package	Pins	Temp (°C)	Status	Price/unit USD (100-999)	Pack Qty	DSCC Number	Availability / Samples
JM38510/37201B2A	FK	20	-55 TO 125	ACTIVE	13.61	1		Check stock or order
JM38510/37201BEA	J	16	-55 TO 125	ACTIVE	8.02	1		Check stock or order
SN54ALS174J	J	16	-55 TO 125	ACTIVE	2.59	1		Check stock or order
SNJ54ALS174FK	FK	20	-55 TO 125	ACTIVE	10.44	1	83019012A	Check stock or order
SNJ54ALS174J	J	16	-55 TO 125	ACTIVE	3.07	1	8301901EA	Check stock or order
SNJ54ALS174W	W	16	-55 TO 125	ACTIVE	9.60	1	8301901FA	Check stock or order

Application Reports

View Application Reports for [Digital Logic](#)

- [ADVANCED SCHOTTKY \(ALS AND AS\) LOGIC FAMILIES](#) (SDAA010 - Updated: 02/05/1999)
- [BUS-INTERFACE DEVICES WITH OUTPUT-DAMPING RESISTORS OR REDUCED-DRIVE OUTPUTS](#) (SCBA012A - Updated: 08/01/1997)
- [DESIGNING WITH LOGIC](#) (SDYA009C - Updated: 06/01/1997)
- [INPUT AND OUTPUT CHARACTERISTICS OF DIGITAL INTEGRATED CIRCUITS](#) (SDYA010 - Updated: 02/05/1999)

- [LIVE INSERTION \(SDYA012](#) - Updated: 02/05/1999)

Related Documents

- [DOCUMENTATION RULES \(SAP\) AND ORDERING INFORMATION \(SZZU001B](#), 4 KB - Updated: 05/06/1999)
- [LOGIC SELECTION GUIDE SECOND HALF 2000 \(SDYU001N](#), 5035 KB - Updated: 04/17/2000)
- [MORE POWER IN LESS SPACE - TECHNICAL ARTICLE \(SCAU001A](#), 850 KB - Updated: 03/01/1996)

Table Data Updated on: 8/8/2000



Products

Development Tools

Applications

Search

 Advanced Search TI Home TI&ME Employment Tech Support Comments Site Map TI Global[>> Semiconductor Home](#) > [Products](#) > [Digital Logic](#) > [Flip-Flops](#) > [D-Type Flip-Flops](#) >

SN54ALS175, QUADRUPLE D-TYPE FLIP-FLOPS WITH CLEAR

Device Status: Active

- > [Description](#)
- > [Features](#)
- > [Datasheets](#)
- > [Pricing/Samples/Availability](#)
- > [Application Notes](#)
- > [Related Documents](#)

Parameter Name	SN54ALS175
Voltage Nodes (V)	5
Vcc range (V)	4.5 to 5.5
Input Level	TTL
Output Level	TTL
Output	2S
No. of Bits	4

Description

These positive-edge-triggered flip-flops utilize TTL circuitry to implement D-type flip-flop logic. All have a direct-clear ($\overline{\text{CLR}}$) input. The 'ALS175 and 'AS175B feature complementary outputs from each flip-flop.

Information at the data (D) inputs meeting the setup-time requirements is transferred to the outputs on the positive-going edge of the clock pulse. Clock triggering occurs at a particular voltage level and is not directly related to the transition time of the positive-going pulse. When the clock (CLK) input is at either the high or low level, the D-input signal has no effect at the output.

These circuits are fully compatible for use with most TTL circuits.

The SN54ALS174, SN54ALS175, SN54AS174, and SN54AS175B are characterized for operation over the full military temperature range of -55°C to 125°C. The SN74ALS174, SN74ALS175, SN74AS174, and SN74AS175B are characterized for operation from 0°C to 70°C.

Features

- 'ALS174 and 'AS174 Contain Six Flip-Flops With Single-Rail Outputs
- 'ALS175 and 'AS175B Contain Four Flip-Flops With Double-Rail Outputs
- Buffered Clock and Direct-Clear Inputs
- Applications Include:
 - Buffer/Storage Registers
 - Shift Registers
 - Pattern Generators
- Fully Buffered Outputs for Maximum Isolation From External Disturbances ('AS Only)
- Package Options Include Plastic Small-Outline (D) Packages, Ceramic Chip Carriers (FK), and Standard Plastic (N) and Ceramic (J) 300-mil DIPs

To view the following documents, [Acrobat Reader 3.x](#) is required.

To download a document to your hard drive, right-click on the link and choose 'Save'.

Datasheets

Full datasheet in Acrobat PDF: [sdas207d.pdf](#) (127 KB)

Full datasheet in Zipped PostScript: [sdas207d.psz](#) (123 KB)

Pricing/Samples/Availability

Orderable Device	Package	Pins	Temp (°C)	Status	Price/unit USD (100-999)	Pack Qty	DSCC Number	Availability / Samples
JM38510/37202B2A	FK	20	-55 TO 125	ACTIVE	13.61	1		Check stock or order
JM38510/37202BEA	J	16	-55 TO 125	ACTIVE	8.02	1		Check stock or order
SN54ALS175J	J	16	-55 TO 125	ACTIVE	2.59	1		Check stock or order
SNJ54ALS175FK	FK	20	-55 TO 125	ACTIVE	10.44	1	83019022A	Check stock or order
SNJ54ALS175J	J	16	-55 TO 125	ACTIVE	3.07	1	8301902EA	Check stock or order
SNJ54ALS175W	W	16	-55 TO 125	ACTIVE	9.60	1	8301902FA	Check stock or order

Application Reports

View Application Reports for [Digital Logic](#)

- [ADVANCED SCHOTTKY \(ALS AND AS\) LOGIC FAMILIES](#) (SDAA010 - Updated: 02/05/1999)
- [BUS-INTERFACE DEVICES WITH OUTPUT-DAMPING RESISTORS OR REDUCED-DRIVE OUTPUTS](#) (SCBA012A - Updated: 08/01/1997)
- [DESIGNING WITH LOGIC](#) (SDYA009C - Updated: 06/01/1997)
- [INPUT AND OUTPUT CHARACTERISTICS OF DIGITAL INTEGRATED CIRCUITS](#) (SDYA010 - Updated: 02/05/1999)

- [LIVE INSERTION \(SDYA012 - Updated: 02/05/1999\)](#)

Related Documents

- [DOCUMENTATION RULES \(SAP\) AND ORDERING INFORMATION \(SZZU001B, 4 KB - Updated: 05/06/1999\)](#)
- [LOGIC SELECTION GUIDE SECOND HALF 2000 \(SDYU001N, 5035 KB - Updated: 04/17/2000\)](#)
- [MORE POWER IN LESS SPACE - TECHNICAL ARTICLE \(SCAU001A, 850 KB - Updated: 03/01/1996\)](#)

Table Data Updated on: 8/8/2000