
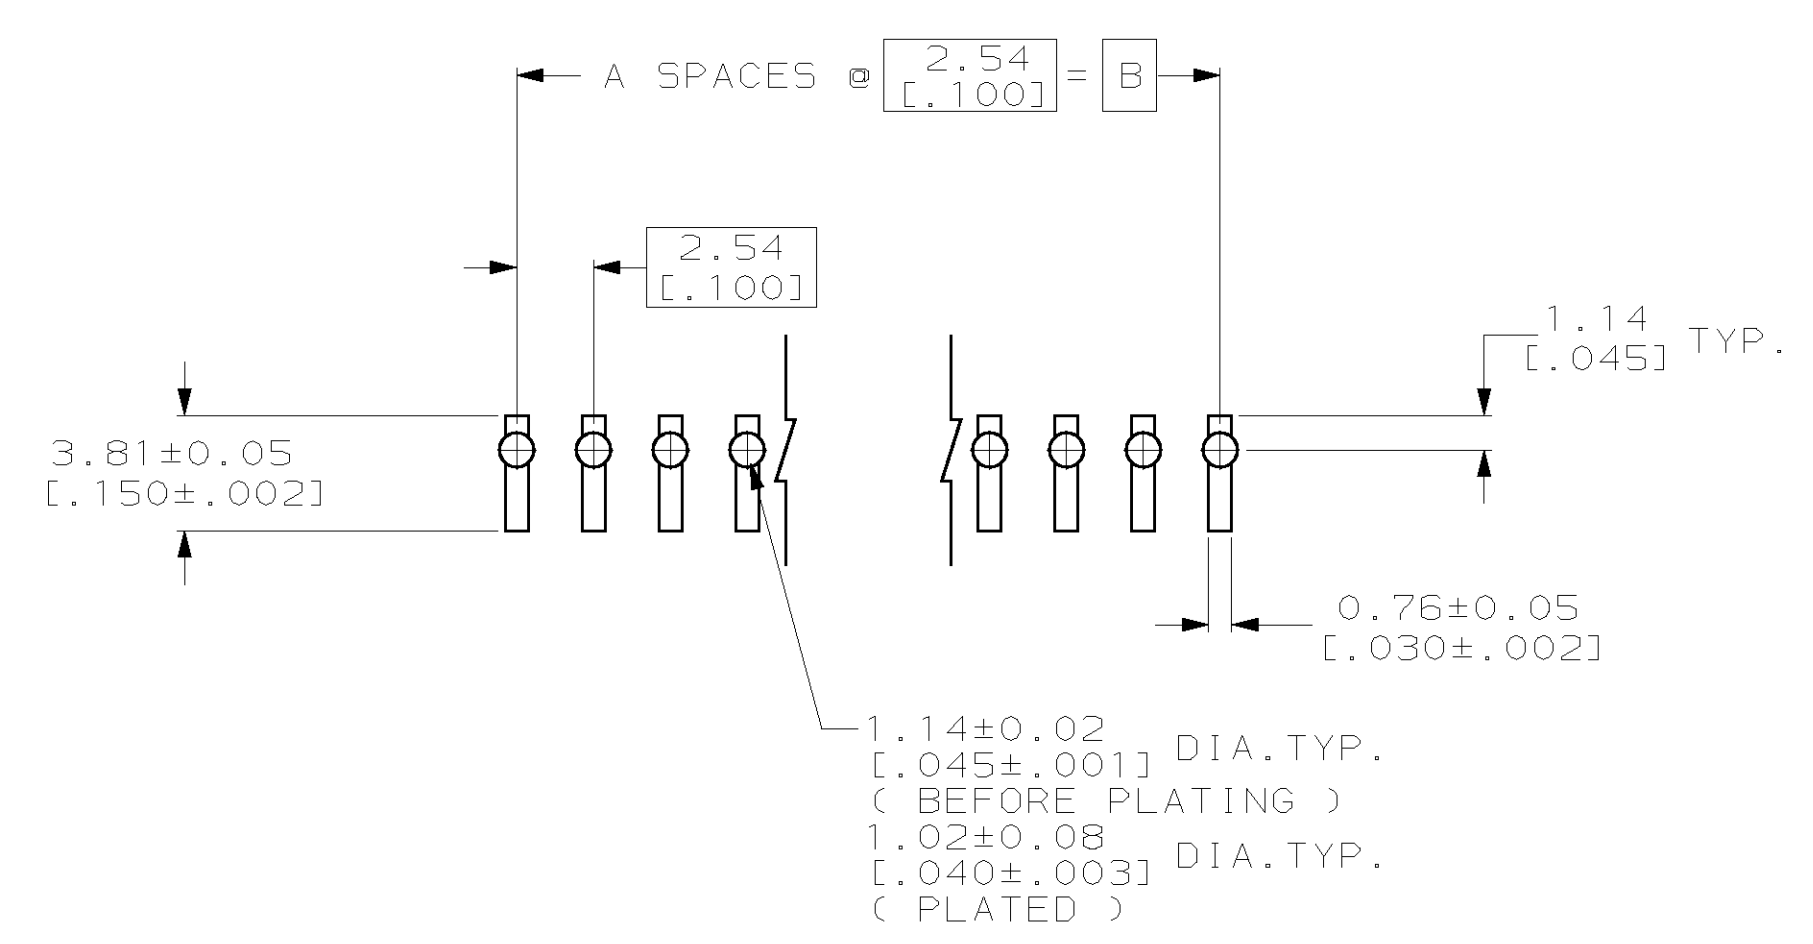


REV. NO.		DATE	BY	CHKD.	APPROV.
0	DP 4633-95-82	6/21/95	TH	GD	
A	REV PER EC 0430-217-97	11 AUG 97	MB	CS	
B	REV PER 0621-0018-99	26MAY99	BH	JLG	

- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 2 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 3 SELECTIVE POSTS ARE FORMED TO PROVIDE CONNECTOR RETENTION TO PC BOARD UNTIL SOLDERED. RETENTION FEATURE IS FOR .055 MINIMUM PC BOARD THICKNESS. (SEE DETAIL Z FOR FORM AND TABLE FOR LOCATIONS.)
- 4 0.000762 [.000030] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD, ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- 5 HOUSING: GLASS FILLED THERMOPLASTIC, COLOR, BLACK. (WILL WITHSTAND VAPOR PHASE REFLOW.)

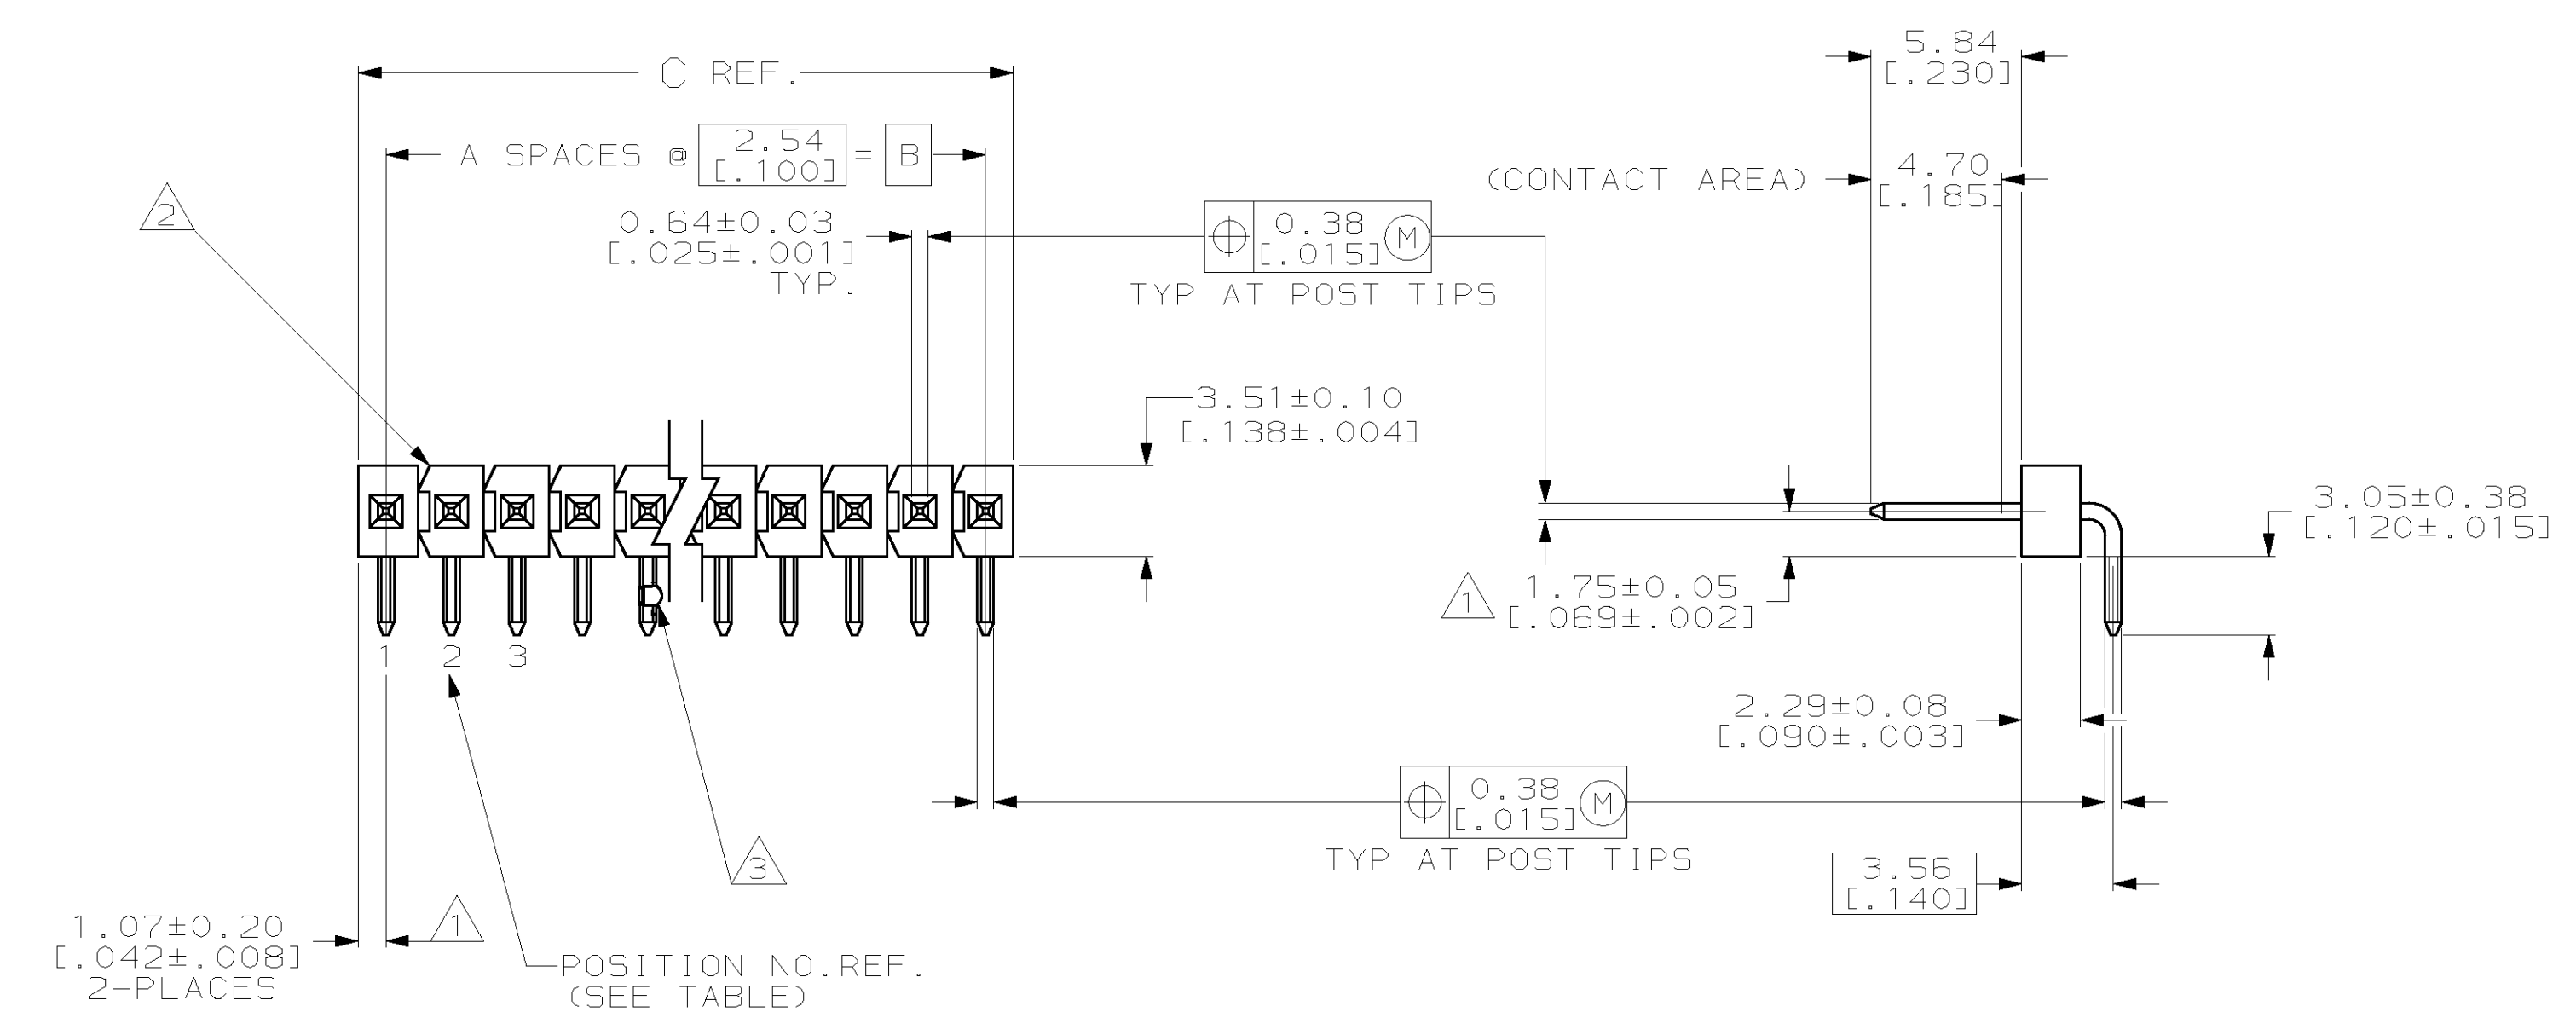

DETAIL Z
 POST DETAIL TYP.
 2 POST MINIMUM
 SCALE 20:1

RECOMMENDED PC BOARD MOUNTING DIMENSIONS
 FOR .063 [1.60] THICK PC BOARD AND
 .012 [1.305] STENCIL THICK.

LOC	DIST	DESCRIPTION	DATE	OWN	APVD
1,2,39,40	101.19 [3.984]	99.06 [3.900]	39	40	4-146306-0
1,2,38,39	98.65 [3.884]	96.52 [3.800]	38	39	3-146306-9
1,2,37,38	96.11 [3.784]	93.98 [3.700]	37	38	3-146306-8
1,2,36,37	93.57 [3.684]	91.44 [3.600]	36	37	3-146306-7
1,2,35,36	91.03 [3.584]	88.90 [3.500]	35	36	3-146306-6
1,2,34,35	88.49 [3.484]	86.36 [3.400]	34	35	3-146306-5
1,2,33,34	85.95 [3.384]	83.82 [3.300]	33	34	3-146306-4
1,2,32,33	83.41 [3.284]	81.28 [3.200]	32	33	3-146306-3
1,2,31,32	80.87 [3.184]	78.74 [3.100]	31	32	3-146306-2
1,2,30,31	78.33 [3.084]	76.20 [3.000]	30	31	3-146306-1
1,2,29,30	75.79 [2.984]	73.66 [2.900]	29	30	3-146306-0
1,2,28,29	73.25 [2.884]	71.12 [2.800]	28	29	2-146306-9
1,2,27,28	70.71 [2.784]	68.58 [2.700]	27	28	2-146306-8
1,2,26,27	68.17 [2.684]	66.04 [2.600]	26	27	2-146306-7
1,2,25,26	65.63 [2.584]	63.5 [2.500]	25	26	2-146306-6
1,2,24,25	63.09 [2.484]	60.96 [2.400]	24	25	2-146306-5
1,2,23,24	60.55 [2.384]	58.42 [2.300]	23	24	2-146306-4
1,2,22,23	58.01 [2.284]	55.88 [2.200]	22	23	2-146306-3
1,2,21,22	55.47 [2.184]	53.34 [2.100]	21	22	2-146306-2
1,2,20,21	52.93 [2.084]	50.80 [2.000]	20	21	2-146306-1
1,2,19,20	50.39 [1.984]	48.26 [1.900]	19	20	2-146306-0
1,2,18,19	47.85 [1.884]	45.72 [1.800]	18	19	1-146306-9
1,2,17,18	45.31 [1.784]	43.18 [1.700]	17	18	1-146306-8
1,2,16,17	42.77 [1.684]	40.64 [1.600]	16	17	1-146306-7
1,2,15,16	40.23 [1.584]	38.10 [1.500]	15	16	1-146306-6
1,2,14,15	37.69 [1.484]	35.56 [1.400]	14	15	1-146306-5
1,2,13,14	35.15 [1.384]	33.02 [1.300]	13	14	1-146306-4
1,2,12,13	32.61 [1.284]	30.48 [1.200]	12	13	1-146306-3
1,2,11,12	30.07 [1.184]	27.94 [1.100]	11	12	1-146306-2
1,2,10,11	27.53 [1.084]	25.40 [1.000]	10	11	1-146306-1
1,2,9,10	24.99 [.984]	22.86 [.900]	9	10	1-146306-0
1,2,8,9	22.45 [.884]	20.32 [.800]	8	9	146306-9
1,2,7,8	19.91 [.784]	17.78 [.700]	7	8	146306-8
1,2,6,7	17.37 [.684]	15.24 [.600]	6	7	146306-7
ALL	14.83 [.584]	12.70 [.500]	5	6	146306-6
ALL	12.29 [.484]	10.16 [.400]	4	5	146306-5
ALL	9.75 [.384]	7.62 [.300]	3	4	146306-4
ALL	7.21 [.284]	5.08 [.200]	2	3	146306-3
OBSOLETE	4.67 [.184]	2.54 [.100]	1	2	146306-2
OBSOLETE	2.13 [.084]	-	0	1	146306-1

OBSOLETE
 OBSOLETE

HOLD-DOWN POST CONFIG. LOCATIONS.	C	B	A	NO. OF POSITIONS	PART NUMBER

DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±0.51 [.02] 2 PLC ±0.127 [.005] 3 PLC ±0.0127 [.0005] 4 PLC ±. FINISH:		DWG: I. HOFFMAN 6/21/95 CHK: G. DUBNICZKI 12/4/95 APVD: G. DUBNICZKI 12/4/95 PRODUCT SPEC: - APPLICATION SPEC: - WEIGHT: - CUSTOMER DRAWING:	AMP Incorporated Harrisburg, PA 17105-3608 NAME: HEADER ASSEMBLY, MOD II, BREAKAWAY, HIGH TEMPERATURE, RIGHT ANGLE, SINGLE ROW, .100, W/.025 SQUARE POSTS WITH HOLD-DOWN CONFIGURATION. SIZE: A1 CAGE CODE: 00779 DRAWING NO: 146306 SCALE: 4:1 SHEET: 1 OF 1 REV: B
--	--	--	--

- [Home](#)
- [Part Number Search](#)
- [Document Search](#)
- [Text Search](#)
- [Alternate Part Search](#)
- [Multiple Part Comparison](#)
- [Alphabetical Search](#)
- [Brand Search](#)
- [Industry Product Search](#)
- [Product Type Search](#)
- [Product Family Search](#)
- [Competitor Cross Reference](#)
- [Lead Free Solutions](#)
- [Help/Glossary](#)

Current Brand View	AMP	View All Tyco Electronics Brands Click to activate links to all other products
---------------------------	---------------------	---

AMPMODU AMP .100 & .150 Centerline Through Hole Headers

AMP **146306-3** Active [Active](#)

(Tyco Electronics P/N: 146306-3)

[CAD Geometry](#) | [Search for Parts](#) | Pr [Previous](#) [1](#) [2](#) [3](#) 4 [5](#) [6](#) [Next](#) N

Document links for this part cannot be displayed. Your browser does not support inline frames or is currently configured not to display inline frames. Inline frames are supported in both Internet Explorer 5 and Netscape 6, as well as all later versions of these browsers.

Related Part Information		
General Information	eCommerce	Related Part Information
<ul style="list-style-type: none"> General Info Sales Info Assembly Subcontractors 	<ul style="list-style-type: none"> Pricing Product Availability 	

Photos & Line Drawings - The photographs and/or line drawings are representative images of a product for viewing purposes only.

[Product Photo](#)

Searchable Features:	
Brand:	AMP
Header Type:	Breakaway
No. of Rows:	Single
No. of Positions:	3
Mount Angle:	Right Angle
PCB Retention Feature:	With
PCB Retention Method Feature:	Swaged Tails
Surface Mount Compatible:	Yes
Contact Mating Area Plating:	Gold (30)
Board Standoff:	Without

Other Properties:	
Contact Shape:	Square
Post Size (mm [in]):	0.64 [.025]
Centerline, Matrix (mm [in]):	2.54 [.100]
Mating Post Length (mm [in]):	5.84 [0.230]
Contact Material:	Phosphor Bronze
Housing Material:	Thermoplastic
Contact Termination Area Plating:	Tin-Lead over Nickel
Gender:	Header
Housing Flammability Rating:	UL 94V-0

Mounting Ears:	Without
Panel Attachment:	No
Mating Connector Lock:	Without
High Temperature Housing:	Yes
High Speed Serial Data Connector:	No
Termination Post Length (mm [in]):	3.05 [0.120]

[Copyright](#) and [Privacy Statement](#)

Visit [Tyco International, Ltd.](#)

[Products](#) | [Catalog](#) | [Brands](#) | [Industries](#) | [Commerce](#) | [Supplier](#) | [Customer Service](#) | [About](#) | [Home](#)