
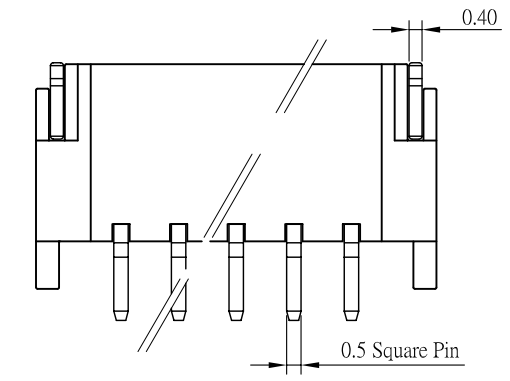
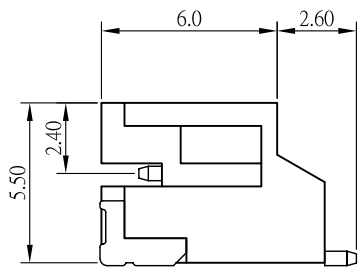


RECOMMENDED P.C. BOARD PATTERN DIM.

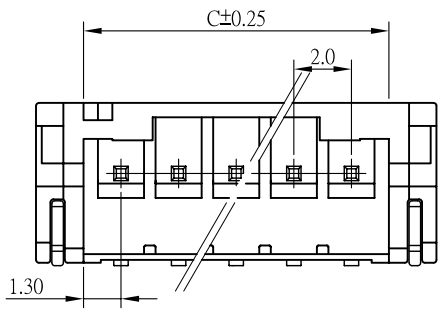

SPECIFICATIONS

Electrical

- Voltage Rating: 100V AC, DC
- Current Rating: 2A AC, DC
- Withstand Voltage: 800V AC/ min
- Insulation Resistance: 1000MΩ / min
- Temperature Range: -25°C ~ +85°C

Material

- Wafer: High Temperature Plastic Nylon 46 UL94V-0
- Pin: High Strength Brass With Tin Over Nickel Plated
- Applicable PC Board Thickness: 0.8 ~ 1.6mm
- Contact Resistance: Initial Value / 10mΩ max.
After environmental testing 20mΩ max.

CKT.	A	B	C
2	2.00	7.90	4.60
3	4.00	9.90	6.60
4	6.00	11.90	8.60
5	8.00	13.90	10.60
6	10.00	15.90	12.60
7	12.00	17.90	14.60
8	14.00	19.90	16.60
9	16.00	21.90	18.60
10	18.00	23.90	20.60
11	20.00	25.90	22.60
12	22.00	27.90	24.60
13	24.00	29.90	26.60
14	26.00	31.90	28.60
15	28.00	33.90	30.60
16	30.00	35.90	32.60

MORETHANALL
CONNECTORS
ASSEMBLIES

焯倫有限公司

PART NO. PH-W-xx		APPROVED BY CY		TOLERANCES ARE		DESCRIP TION: 2.0mm WIRE TO BOARD HEADER SMD 90° SM3 TYPE	
DWG NO. PH-W-xx		DRAWING BY		.X ± 0.5 .XX ± 0.1 .XXX AWG		AREA	
FILE NO.		PROJECTION				REVISIONS	
UNIT / mm	SCALE 1:1					HK	DATE