

GD54/74S02

QUADRUPLE 2-INPUT POSITIVE-NOR GATES


Description

This device contains four independent 2-input NOR gates. It performs the Boolean functions $Y = \overline{A \cdot B}$ or $Y = \overline{A + B}$ in positive logic.

Function Table


INPUTS		OUTPUT
A	B	Y
H	X	L
X	H	L
L	L	H

Pin Configuration

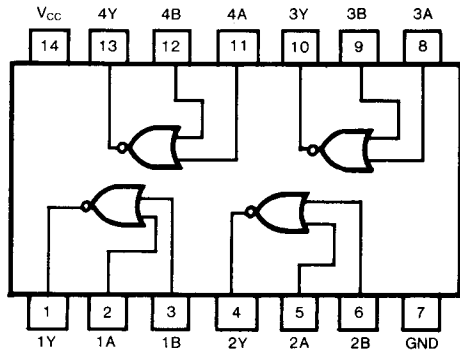

Suffix-Blank: Plastic Dual In Line Package
 Suffix-J : Ceramic Dual In Line Package

Circuit Schematic (each gate)

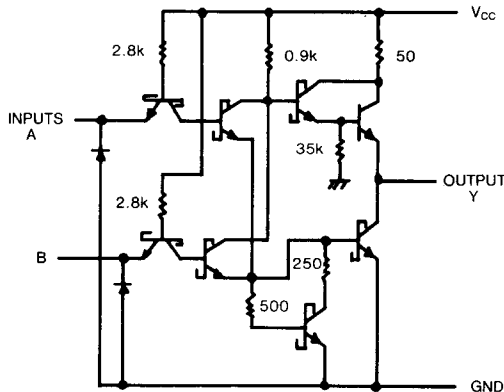

Absolute Maximum Ratings

- Supply voltage, V_{CC} 7V
- Input voltage 5.5V
- Operating free-air temperature range 54S -55°C to 125°C
 74S 0°C to 70°C
- Storage temperature range -65°C to 150°C

Recommended Operating Conditions

SYMBOL	PARAMETER		MIN	NOM *	MAX	UNIT
V_{CC}	Supply voltage	54	4.5	5	5.5	V
		74	4.75	5	5.25	
I_{OH}	High-level output current	54, 74			-1	mA
I_{OL}	Low-level output current	54, 74			20	mA
T_A	Operating free-air temperature	54	-55		125	°C
		74	0		70	

Electrical Characteristics over recommended operating free-air temperature range (unless otherwise noted)

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP (Note 1)	MAX	UNIT	
V_{IH}	High-level input voltage			2		V	
V_{IL}	Low-level input voltage	54			0.8	V	
		74			0.8		
V_{IK}	Input clamp voltage	$V_{CC} = \text{Min}, I_I = -18\text{mA}$			-1.2	V	
V_{OH}	High-level output voltage	$V_{CC} = \text{Min}, V_{IL} = \text{Max}$ $I_{OH} = \text{Max},$	54	2.5	3.4	V	
			74	2.7	3.4		
V_{OL}	Low-level output voltage	$V_{CC} = \text{Min},$ $I_{OL} = \text{Max}, V_{IH} = \text{Min}$			0.5	V	
I_I	Input current at maximum input voltage	$V_{CC} = \text{Max}, V_I = 5.5\text{V}$			1	mA	
I_{IH}	High-level input current	$V_{CC} = \text{Max}, V_I = 2.7\text{V}$			50	μA	
I_{IL}	Low-level input current	$V_{CC} = \text{Max}, V_I = 0.5\text{V}$			-2	mA	
I_{OS}	Short-circuit output current	$V_{CC} = \text{Max}$ (Note 2)		-40	-100	mA	
I_{CCH}	Supply current	Total with outputs high	$V_{CC} = \text{Max}$		17	29	mA
I_{CCL}		Total with outputs low	$V_{CC} = \text{Max}$		26	45	mA

Note 1: All typical values are at $V_{CC} = 5\text{V}$, $T_A = 25^\circ\text{C}$.

Note 2: Not more than one output should be shorted at a time, and the duration should not exceed one second.

Switching Characteristics, $V_{CC} = 5\text{V}$, $T_A = 25^\circ\text{C}$

SYMBOL	PARAMETER	TEST CONDITION#	MIN	TYP	MAX	UNIT
t_{PLH}	Propagation delay time, low-to-high-level output	$C_L = 15\text{pF}, R_L = 280\Omega$		3.5	5.5	ns
t_{PHL}	Propagation delay time, high-to-low-level output			3.5	5.5	

#For load circuit and voltage waveforms, see page 3-12.