


SMT .050" (1,27mm) STRIPS RSM SERIES

Specifications: RSM

Insulator Material: Black Liquid Crystal Polymer
Current Rating: 1A
Operating Temp Range: -65°C to +125°C
Max Processing Temp: 230°C for 60 seconds
Plating: Au, or Sn over 50µ" (1,27µm) Ni
Contact Resistance: 10 mΩ max
Lead Size Accepted: .018" (0,46mm) SQ
Insertion Depth: .090" (2,29mm) to .235" (5,97mm) or "pass-through" entry




Mates with:
 FTR, HTMS, HDWM,
 DWM, TML, ZML



APPLICATION SPECIFIC OPTION

Locking clips available.
 Call Samtec.



Optional pick-and-place pad

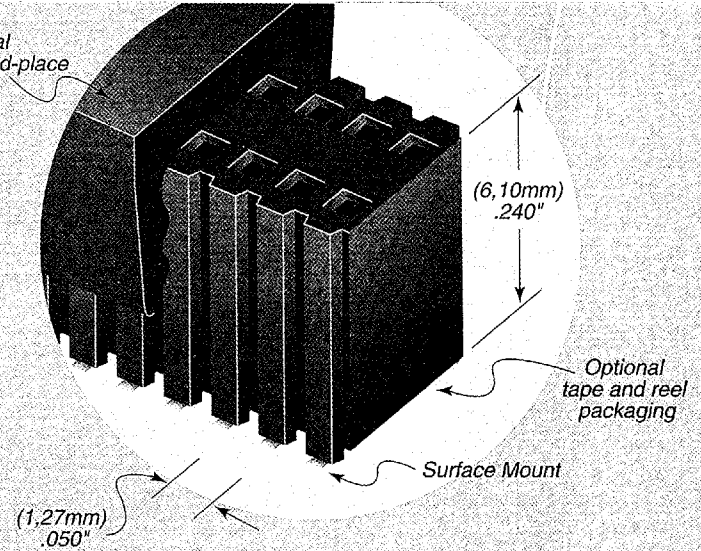

Note:
 Some lengths, styles and options are non-standard, non-returnable.



02 thru 36



- S
 = 30µ" (0,76µm) Gold on contact
 150µ" (3,81µm) Tin on tail

- L
 = 10µ" (0,25µm) Gold on contact
 150µ" (3,81µm) Tin on tail

- T
 = 150µ" (3,81µm) Tin


- S
 = Single Row

- D
 = Double Row


- P
 = Pick & Place Pad

- TR
 = Tape & Reel

TAPE & REEL AVAILABILITY
 No tooling charges.
 125 piece minimum order.
 Order any quantity above minimum.
 In-house design, manufacture.
 Quick turn-around.
 Call Samtec for specifications and ordering information.

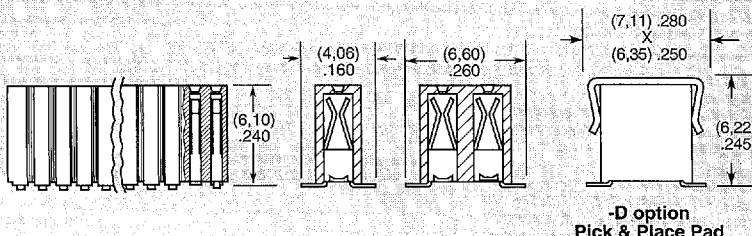

-D option Pick & Place Pad

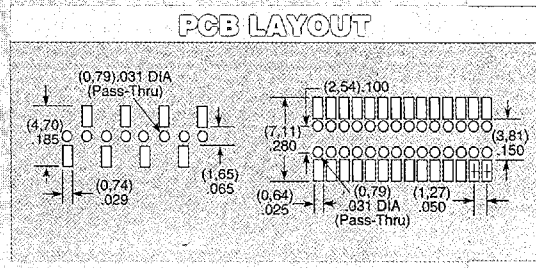

D 12F 7964149 0002082 384