

2.54mm (0.1") Pin Header

(Double Row 7.4mm Base)

2100 Series

APPLICATION AND FEATURES

1. Variable pin length, gold or tin plated.
2. Standoffs facilitate post soldering clean.
3. Mate with P.C.Board connectors.

Finish: Tin, Gold or Selective gold.


© Note:

Selective gold: gold plated on contact area,
Tin on solder area

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms Min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40° - +105°C
 Contact Material: Brass or Phosphor bronze
 Insulator Material: Polyester, UL 94V-0

©Standard: P.B.T

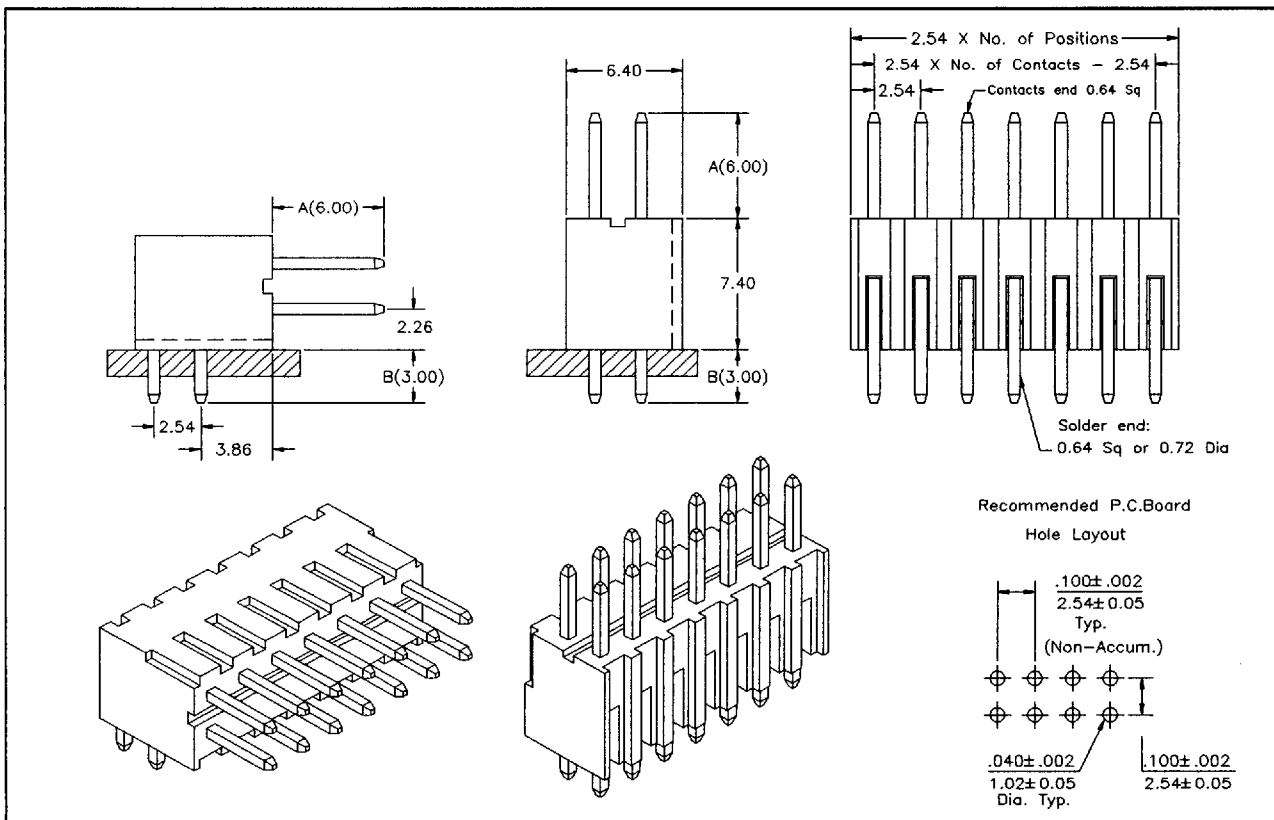

Order Information 2100 Series

Example: 2100-20-S-02-A/B

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
2100	08 to 80 Contacts	Straight S Right Angle R	Tin Plated 01 Gold Plated Flash 02 10 μ" 10 30 μ" 30	A 6.0 B 3.0

SINGATRON ENT. CO., LTD. Tel.: (909) 464-1883 Fax.: (909) 464-1884

901184 000060 365