

Customer Information Sheet

DRAWING No.- D02-982XXXX

SHEET 2 OF 2



IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

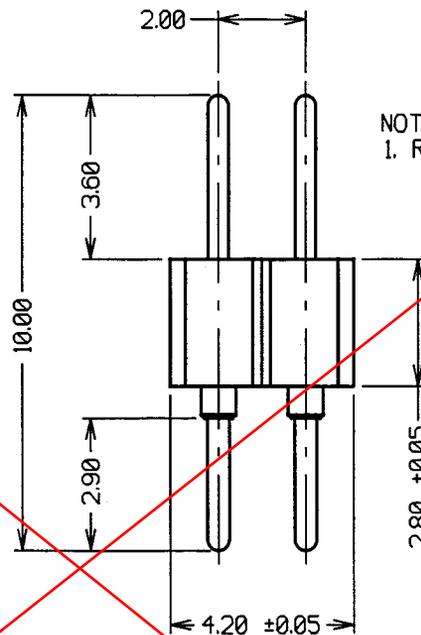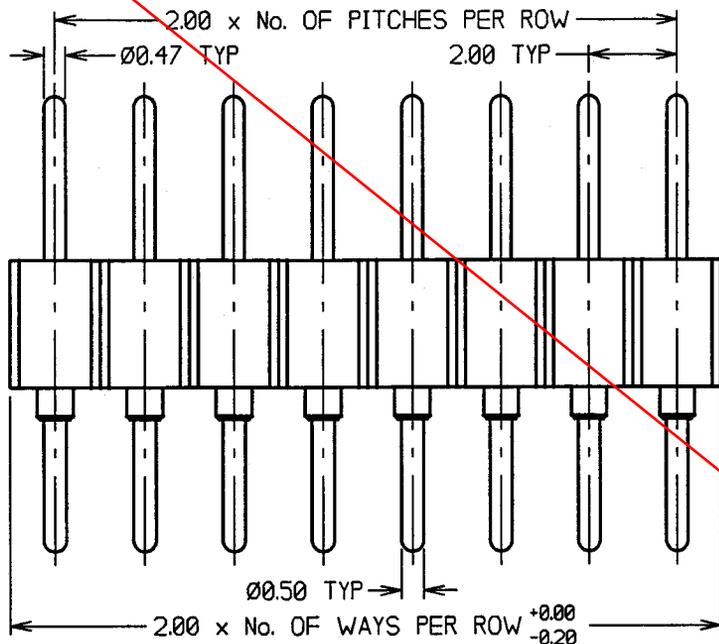

NOTES:
1. RECOMMENDED HOLE SIZE = $\varnothing 0.80 \pm 0.10$ mm.

OBSOLETE

SPECIFICATIONS:

MATERIAL:
MOULDING - GLASS-FILLED POLYESTER UL94V-0
CONTACTS - BRASS

FINISH:
05 = 0.25 μ GOLD OVER 2-3 μ NICKEL
01 = 5 μ 90/10 TIN/LEAD OVER 2-3 μ NICKEL

ORDER CODE:
D02-982XXXX

No. OF WAYS PER ROW

FINISH:
01 - 90/10 TIN/LEAD

SPECIFICATIONS (CONTINUED):

ELECTRICAL:
CURRENT RATING = 3 AMPS
VOLTAGE RATING = 100V AC, 150V DC
CONTACT RESISTANCE = 10 MILLIOHMS MAX
INSULATION RESISTANCE = 10,000 MEGOHMS MIN
DIELECTRIC WITHSTANDING = 1000V AC MIN

MECHANICAL:
SOLDERABILITY = 260°C FOR 5 SECONDS
DURABILITY = 500 CYCLES

ENVIRONMENTAL:
TEMPERATURE RANGE = -55°C TO +125°C

PACKING:
TUBE

FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C024XX (LATEST ISSUE).

2	14.01.98	4235
1	06.08.97	----
ISS.	DATE	C/N
APPROVED: <i>[Signature]</i>		
CHECKED: <i>[Signature]</i>		
DRAWN: D. BECK		
CUSTOMER REF.		
ASSEMBLY DRG:		

HARWIN

HARWIN INC
U.S.A.
TEL: (812) 285 0055
FAX: (812) 285 0056

HARWIN PLC
U.K.
TEL: 01705 370451
FAX: 01705 314590

HARWIN PTE
SINGAPORE
TEL: 65 7794909
FAX: 65 7793868

TOLERANCES
X. = ± 1 mm
X.X = ± 0.25 mm
X.XX = ± 0.10 mm
X.XXX = ± 0.01 mm
ANGLES = $\pm 1^\circ$
UNLESS STATED

MATERIAL:
SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

TITLE:
2mm PITCH DIL VERTICAL
PLUG ASSEMBLY

DRAWING NUMBER:
D02-982XXXX

SHT
2 OF
2