


**.100 SYSTEM  
RIGHT ANGLE  
STRIP HEADER  
ECONOMY LINE**

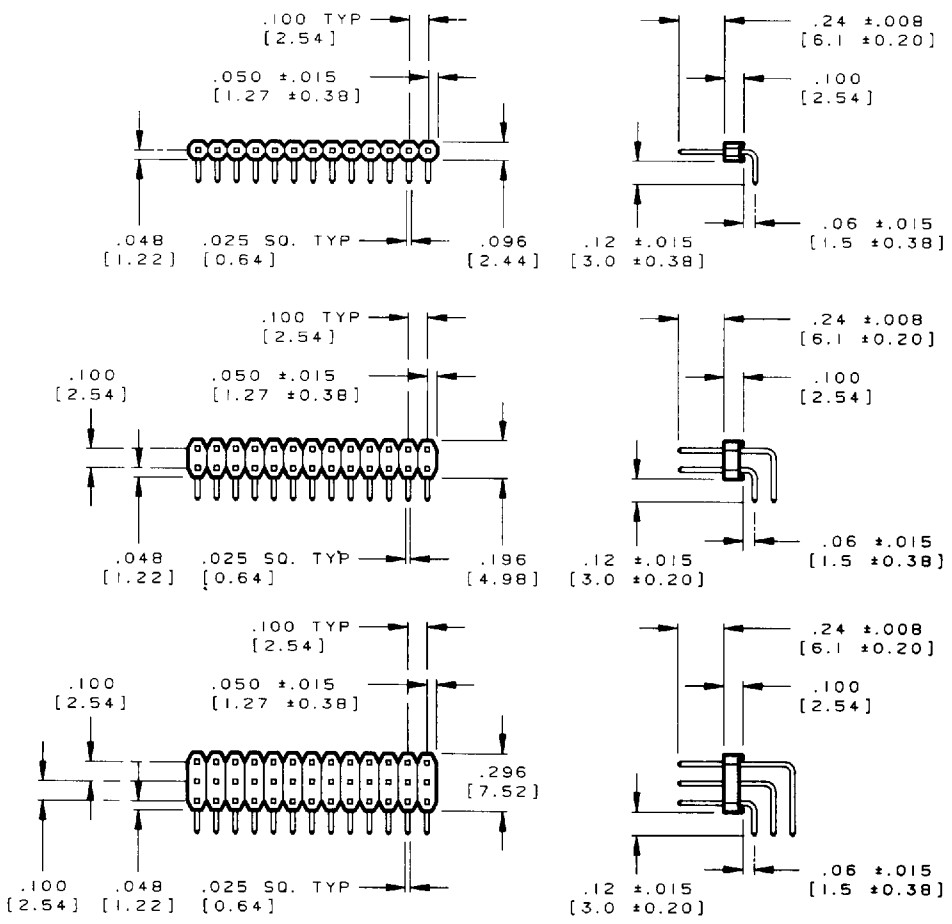

- Features**  
 Available in single, dual and triple row configurations  
 Side stackable, end stackable upon request  
 Notched for easy breaking
- Specifications**
- Environmental**  
 Temperature Range:  
 -55°C to +120°C
- Mechanical**  
 Insulator Material:  
 Glass filled polyester, black, UL94V-0  
 Contact Material:  
 Phosphor Bronze  
 Contact Plating:  
 gold flash
- Electrical**  
 Current Rating:  
 1 AMP  
 Dielectric Withstanding Voltage:  
 500 Vrms  
 Insulation Resistance:  
 > 1000 Megohms

**Part Numbers**

**CA - D 80 R - 24 A - 12**

1      2      3      4      5      6

- |  |  |   |
|--|--|---|
| <p><b>1 SERIES</b><br/>                 S = Single Row<br/>                 D = Dual Row<br/>                 T = Triple Row</p>                                       | <p><b>3 TAIL EXIT</b><br/>                 R = right angle</p>                   | <p><b>5 CONTACT PLATING</b><br/>                 A = gold flash</p>       |
| <p><b>2 NO. OF POSITIONS</b><br/>                 Single Row = 01 thru 40<br/>                 Dual Row = 04 thru 80<br/>                 Triple Row = 09 thru 120</p> | <p><b>4 MATING POST LENGTH (Dim "A")</b><br/>                 24 = .24 [6.1]</p> | <p><b>6 TAIL LENGTH (DIM "B")</b><br/>                 12 = .12 [3.0]</p> |

