


**PIN HEADER „SMD“
ID: 296**


STL 1-XXXXPM / STL 2-XXXXPM

Series 400




TECHNICAL DATA

Pitch	2,54 mm
Insulating Material	high temp. thermoplast UL94V-0
Contact Material	copper alloy
Rated Current	3 Amp.
Rated Voltage	250 V _{AC/DC}
Withstanding Voltage	1000 V _{AC} for one minute
Operating Temperature	-40°C to +105°C
Maximum Soldering Temperature	260°C for 10 seconds

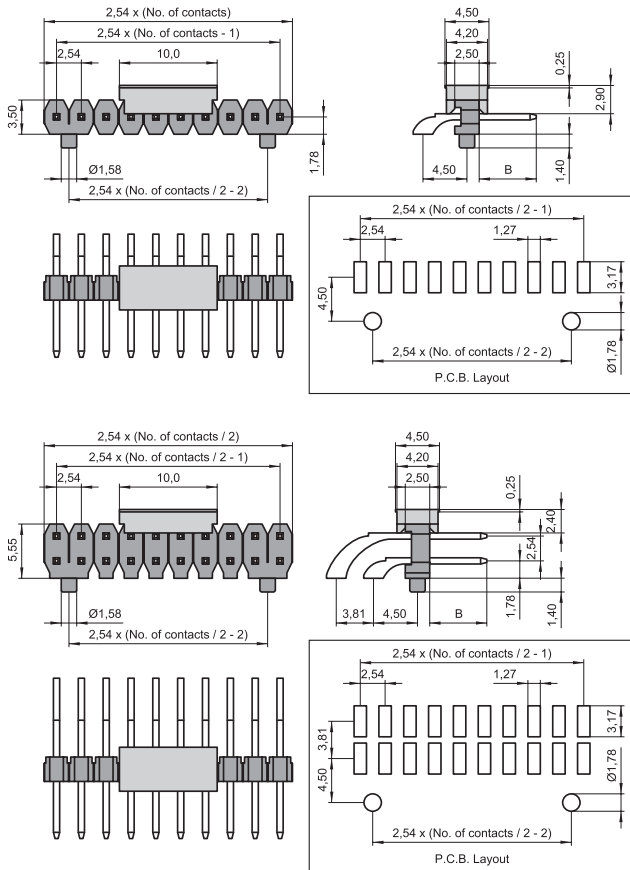

All dimensions in mm.
Other dimensions upon request.

Code	B
0305	3,05
0584	5,84
0813	8,13
1067	10,67

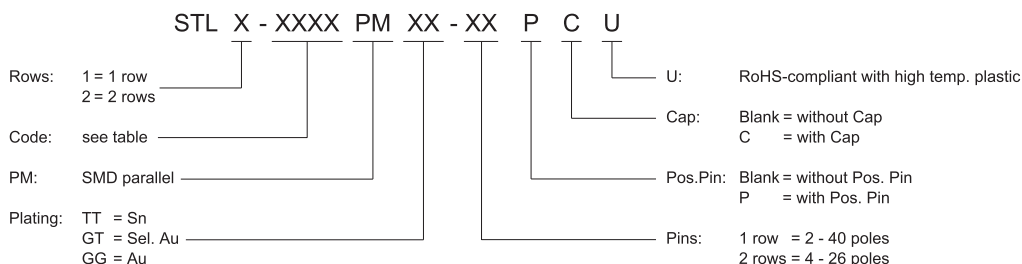

7 | 2,54 mm