


### Pin Header 1.27mm SQ Pin=0.46mm 1 Row H=1.7/2.5mm Right Angle Type

#### Specifications




Current Rate: 1 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C

#### Material


Insulator: Polyester, UL 94V-0  
 ©Standard: Nylon 6T  
 Terminal: Copper Alloy  
 Plating: Gold Plated

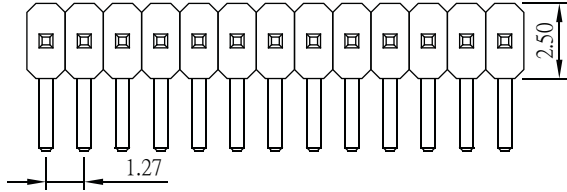


	Dim. C
H=1.7mm	2.20
H=2.5mm	3.00

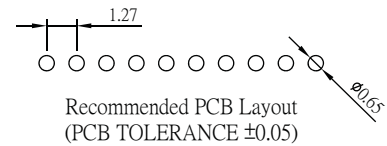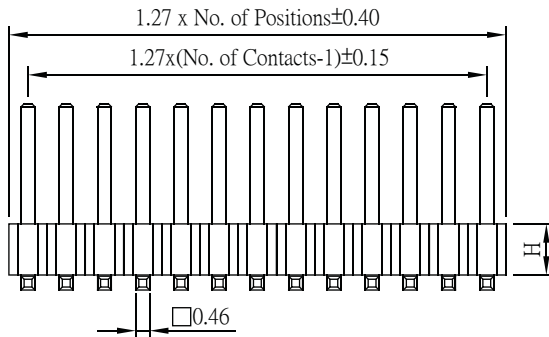




Part No.: PH4R17/25-1XX-U




### Pin Header 1.27mm SQ Pin=0.46mm 2 Row H=1.7/2.5mm Right Angle Type

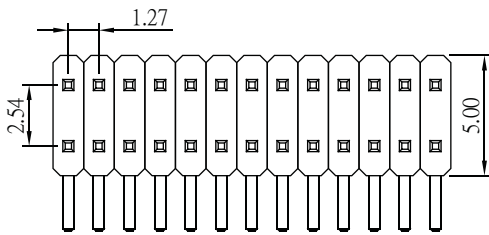


	Dim. C
H=1.7mm	2.20
H=2.5mm	3.00

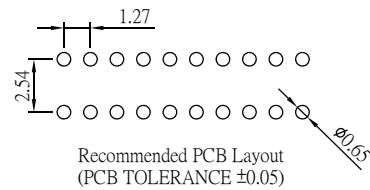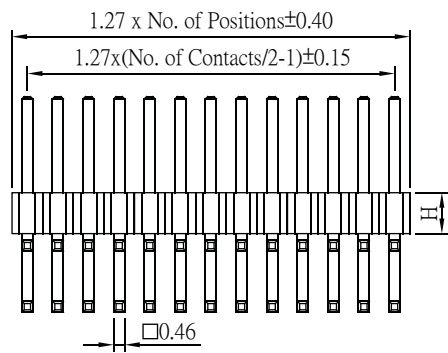

Part No.: PH4R17/25-2XX-U

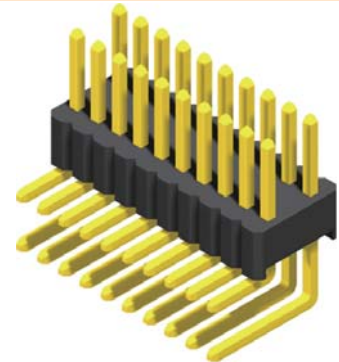

## ORDER INFORMATION

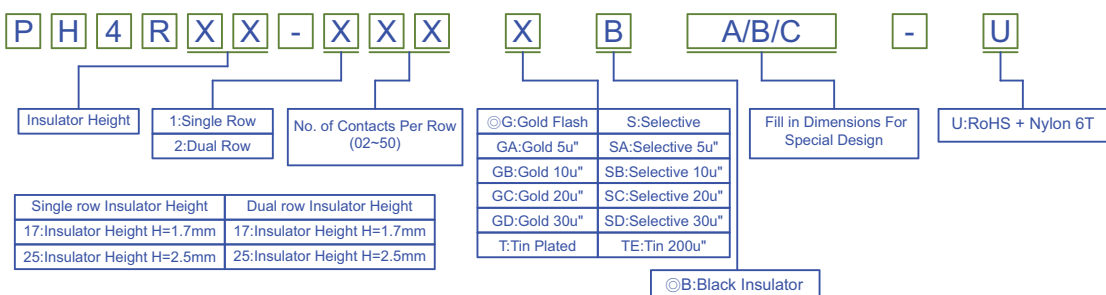

©: Standard Recommended