


FLEXPAC® FEMALE SOCKET CONNECTOR, STRAIGHT SINGLE ROW 2MM (.079") CENTER SPACING

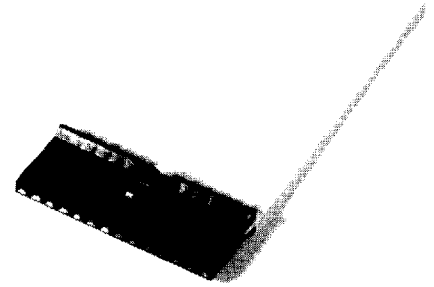

PHYSICAL PROPERTIES

CONTACT MATERIAL: Beryllium copper
 CONTACT PLATING: .000030" (see options)
 HOUSING: Glass filled thermoplastic, 94V-0 rated.
 COLOR: Black
 INSERTION FORCE: 3 oz. per contact
 WITHDRAWAL FORCE: 0.5 oz. per contact excluding latches



ELECTRICAL PROPERTIES

CURRENT RATING: 2.5 amps
 SINGLE ROW: up to 32 contacts
 VOLTAGE RATING: 300 amps

MATING CONNECTOR

See pages 155-156

NOTE: Polarizing key available. Consult factory.

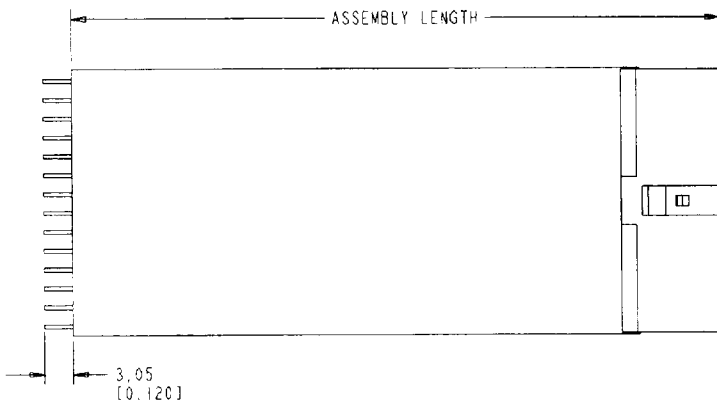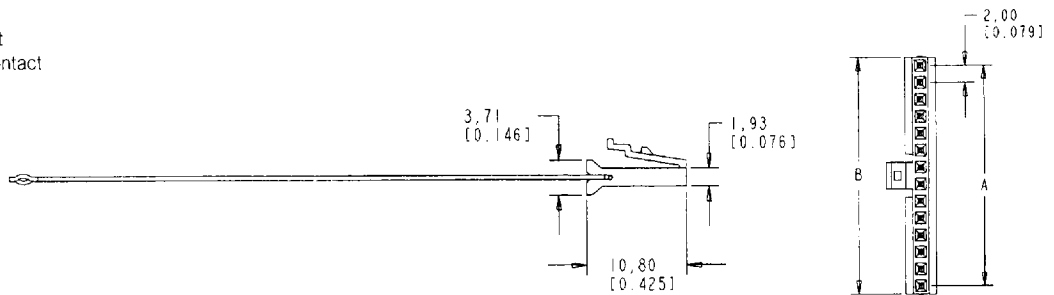

NUMBER OF POSITIONS	DIMENSIONS	
	A	B
4	6.0 (.236)	7.9 (.310)
5	8.0 (.315)	9.9 (.389)
6	10.0 (.394)	11.9 (.468)
7	12.0 (.472)	13.9 (.546)
8	14.0 (.551)	15.9 (.625)
9	16.0 (.630)	17.9 (.704)
10	18.0 (.708)	19.9 (.782)
11	20.0 (.787)	21.9 (.861)
12	22.0 (.866)	23.9 (.940)
13	24.0 (.944)	25.9 (1.018)
14	26.0 (1.023)	27.9 (1.097)
15	28.0 (1.102)	29.9 (1.176)
16	30.0 (1.181)	31.9 (1.253)
17	32.0 (1.259)	33.9 (1.333)
18	34.0 (1.338)	35.9 (1.412)
19	36.0 (1.417)	37.9 (1.491)
20	38.0 (1.495)	39.9 (1.569)
21	40.0 (1.574)	41.9 (1.648)
22	42.0 (1.653)	43.9 (1.727)
23	44.0 (1.731)	45.9 (1.805)
24	46.0 (1.810)	47.9 (1.884)
25	48.0 (1.888)	49.9 (1.962)
26	50.0 (1.968)	51.9 (2.042)
27	52.0 (2.046)	53.9 (2.120)
28	54.0 (2.125)	55.9 (2.200)
29	56.0 (2.204)	57.9 (2.278)
30	58.0 (2.282)	59.9 (2.278)
31	60.0 (2.361)	61.9 (2.435)
32	62.0 (2.440)	63.9 (2.514)

Ordering Information

F2M

2mm Flexpac Jumper

14

Number of positions
4 - 32 single row

N

Jumper Insulation
 N - Nomex
 P - Polyester
 T - Teflon
 K - Kapton

225

Assembly length
in mm
25 - 625 mm

Z

Left End

F

Right End

Termination Style

A - Flexstrip 'A' bend
 B - Flexstrip 'B' bend
 Z - Flexstrip 'Z' bend
 F - 2mm Flexpac single row tin plated contacts
 H - 2mm Flexpac single row gold plated contacts