
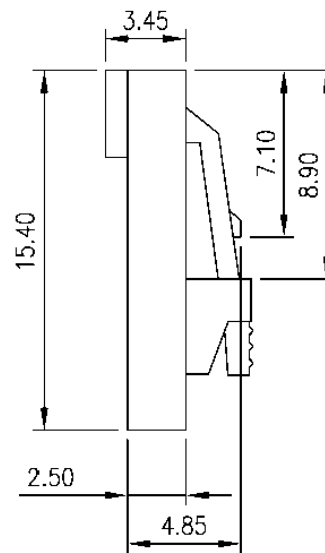


SPECIFICATIONS

Current rating: 2.5 amps
 Voltage rating: 250VAC/VDC
 Housing material: PBT + 15% glass fill, UL94V-0
 Insulation resistance: 1,000 megohms min.
 Withstanding: 1000VAC for 1 min.
 Operating temperature: -40°C to +105°C

A=Pos. X 2.54 - 1
 B=Pos. X 2.54 + 0.07

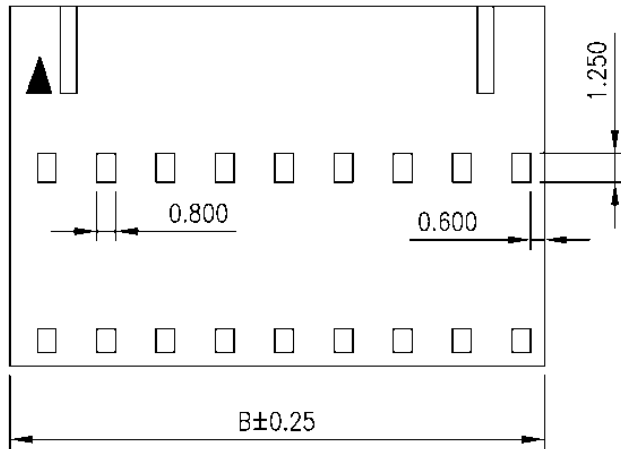

Series	Type	Gender	Positions
JS	1820	H	XX
Pluggable connectors	Single row housing	H=Female	2-16 positions

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-1820-H-XX**

Description: Locking housing, single row, 2.54mm pitch