





MAJOR LEAGUE ELECTRONICS .100" c.l. Board Stacker Socket Strips - Custom



.100"

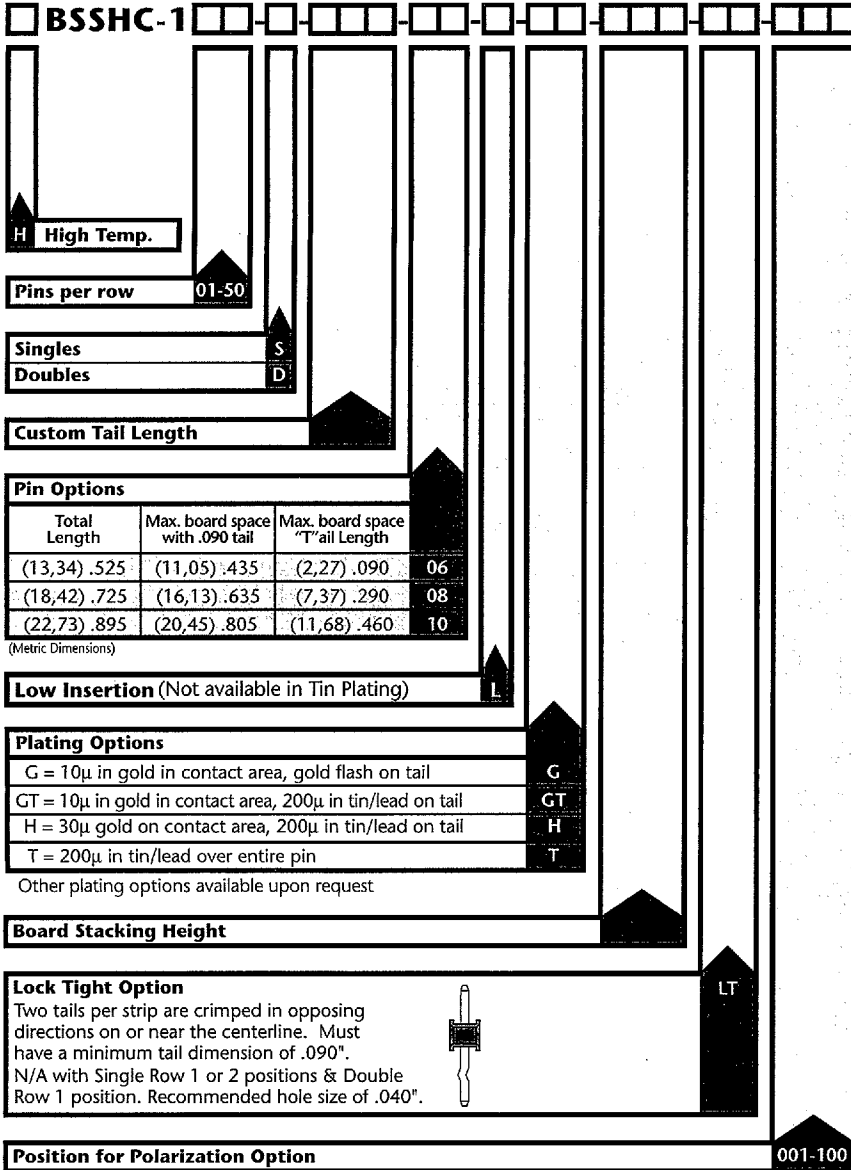

Mates with: TSHS, TSHR, TSHC, BSTS, BSTC, TSCHRE, LTSHR, LTSHRE, BSTCM, LTSHCRE, TSHRE, TSHSM, TSHCR

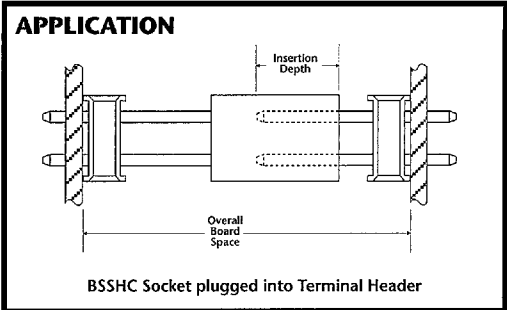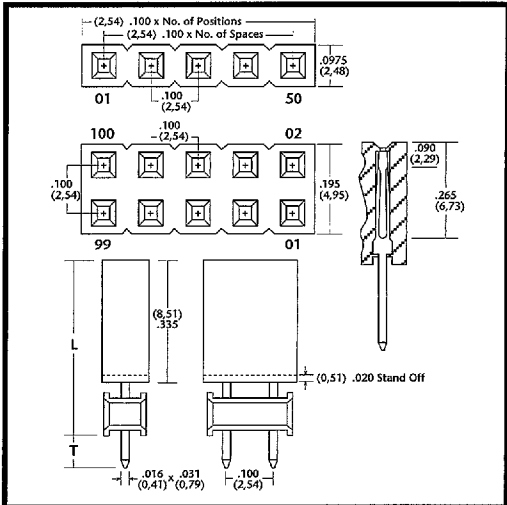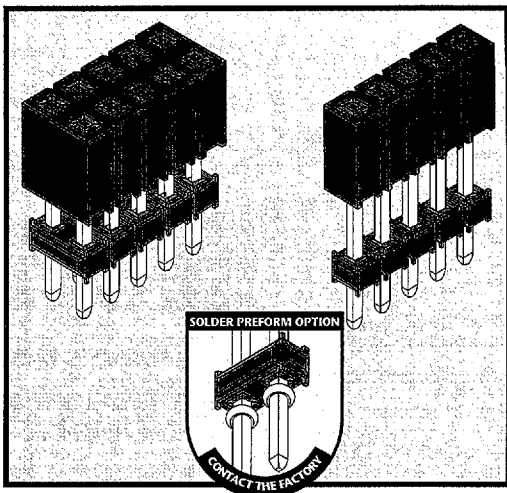

BSSHC Socket plugged into Terminal Header
Product cut to specific sizes is noncancellable/nonreturnable. Parts are subject to change without notice.

Pin Options

Total Length	Max. board space with .090 tail	Max. board space "T"ail Length	
(13,34) .525	(11,05) .435	(2,27) .090	06
(18,42) .725	(16,13) .635	(7,37) .290	08
(22,73) .895	(20,45) .805	(11,68) .460	10

(Metric Dimensions)

Plating Options

G = 10μ in gold in contact area, gold flash on tail	G
GT = 10μ in gold in contact area, 200μ in tin/lead on tail	GT
H = 30μ gold on contact area, 200μ in tin/lead on tail	H
T = 200μ in tin/lead over entire pin	T

Other plating options available upon request

Lock Tight Option
Two tails per strip are crimped in opposing directions on or near the centerline. Must have a minimum tail dimension of .090".
N/A with Single Row 1 or 2 positions & Double Row 1 position. Recommended hole size of .040".

EXAMPLE: To order a double row, 40 position socket strip, with selective plating, a tail length of .270, and a stacking height of .455 the part number would be **BSSHC-140-D-270-08-GT-455**.

Materials & Performance Specifications

	STANDARD	HIGH TEMPERATURE
Insulator	Black, glass filled, polyester	High temperature thermoplastic
Terminal	Phosphor Bronze	Phosphor Bronze
Insulation Resistance	5,000M Ω minimum	5,000M Ω minimum
Flammability	UL 94V-O	UL 94V-O
Temperature Range	-65°C to +125°C	-65°C to +250°C
Current Rating	1 ampere	1 ampere
Plating	All Plating Options over 50μ in Ni	All Plating Options over 50μ in Ni



Delivery On Time Every Time... Or The Order's Free!