



RB551V-30TA SERIES

SURFACE MOUNT SCHOTTKY BARRIER

VOLTAGE 30 Volts CURRENT 0.2 Ampers

FEATURES


- · Low turn-on voltage
- · Fast switching
- PN Junction Guard Ring for Transient and ESD Protection.
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

Case: SOT-23, Plastic

Terminals: Solderable per MIL-STD-750, Method 2026


Approx. Weight: 0.008 gram

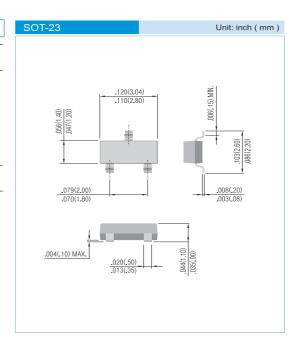

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. For capacitive load, derate current by 20%.

Parameter	Symbol	RB551V-30TA	RB551V-30TC	Units
Marking code		550	551	
Peak Repetitive Reverse Voltage	VRRM	30		V
Maximum Average Forward Current at TA=75°C	Ιo	0.2		А
Peak Forward Surge Current, 1.0s (JEDEC method)	I FSM	0.6		А
Maximum Instantaneous Forward Voltage @ I F=100mA @ I F=500mA	VF	0.31 0.48		V
Maximum DC Reverse Current at Rated DC Blocking Voltage@VR=10V @VR=20V	l R	50 100		uA
Junction Capacitance : at VR=0V	Сл	60		pF
Thermal Resistance, Junction to Ambient	RθJA	833		°C/W
Operating Junction and Storage Temperature Range	TJ, TSTG	-55 to +125		°C
Circuit Figure		Common Anode	Common Cathode	

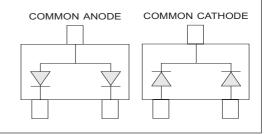


REV.0.1-JUN.27.2008 PAGE . 1





RB551V-30TA SERIES

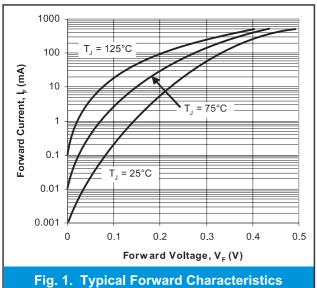


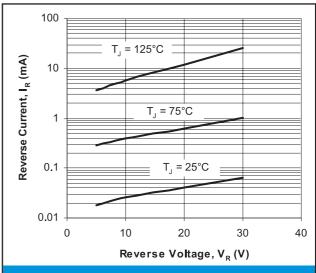


Fig. 2. Typical Reverse Characteristics




REV.0.1-JUN.27.2008 PAGE . 2



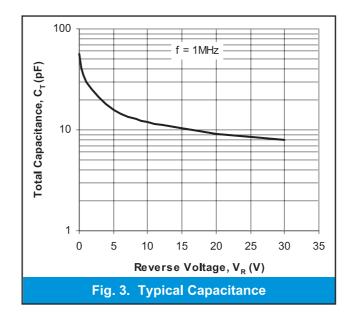

RB551V-30TA SERIES

MOUNTING PAD LAYOUT

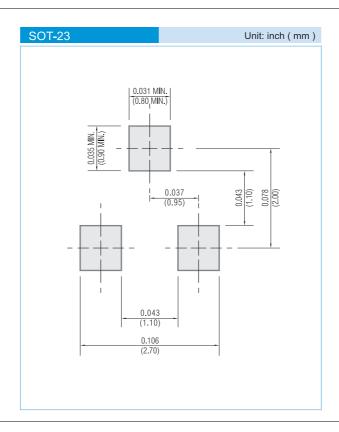

ORDER INFORMATION

Packing information

T/R - 12K per 13" plastic Reel

T/R - 3K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2011

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.

REV.0.1-JUN.27.2008 PAGE . 3