


1.25mm Wafer Right Angle / Straight Type

Specifications

Current Rating: 1A AC,DC
 Voltage Rating: 150V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 30mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstanding Voltage: 500V AC/minute
 Terminal: Brass / Tin Plated
 Material:Nylon 66,UL94V-0

Part No.	Dimensions	
	A	B
1252R-02TW-L	1.25	3.75
1252R-03TW-L	2.50	5.00
1252R-04TW-L	3.75	6.25
1252R-05TW-L	5.00	7.50
1252R-06TW-L	6.25	8.75
1252R-07TW-L	7.50	10.00
1252R-08TW-L	8.75	11.25
1252R-09TW-L	10.00	12.50
1252R-10TW-L	11.25	13.75
1252R-11TW-L	12.50	15.00
1252R-12TW-L	13.75	16.25
1252R-13TW-L	15.00	17.50
1252R-14TW-L	16.25	18.75
1252R-15TW-L	17.50	20.00

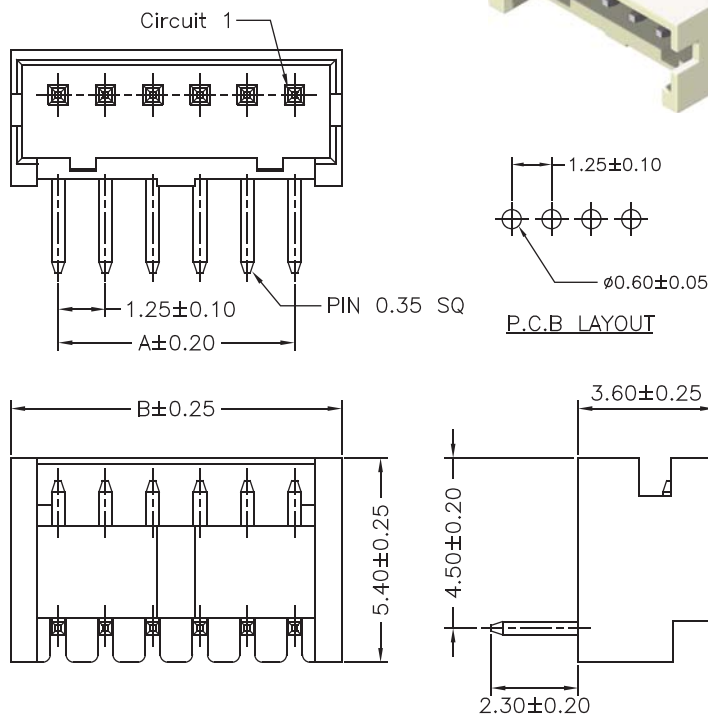


Part No.:1252R-XTW-L

Specifications

Current Rating: 1A AC,DC
 Voltage Rating: 150V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 30mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstanding Voltage: 500V AC/minute
 Terminal: Brass / Tin Plated
 Material:Nylon 66,UL94V-0

Part No.	Dimensions	
	A	B
1252S-02TW-L	1.25	3.75
1252S-03TW-L	2.50	5.00
1252S-04TW-L	3.75	6.25
1252S-05TW-L	5.00	7.50
1252S-06TW-L	6.25	8.75
1252S-07TW-L	7.50	10.00
1252S-08TW-L	8.75	11.25
1252S-09TW-L	10.00	12.50
1252S-10TW-L	11.25	13.75
1252S-11TW-L	12.50	15.00
1252S-12TW-L	13.75	16.25
1252S-13TW-L	15.00	17.50
1252S-14TW-L	16.25	18.75
1252S-15TW-L	17.50	20.00

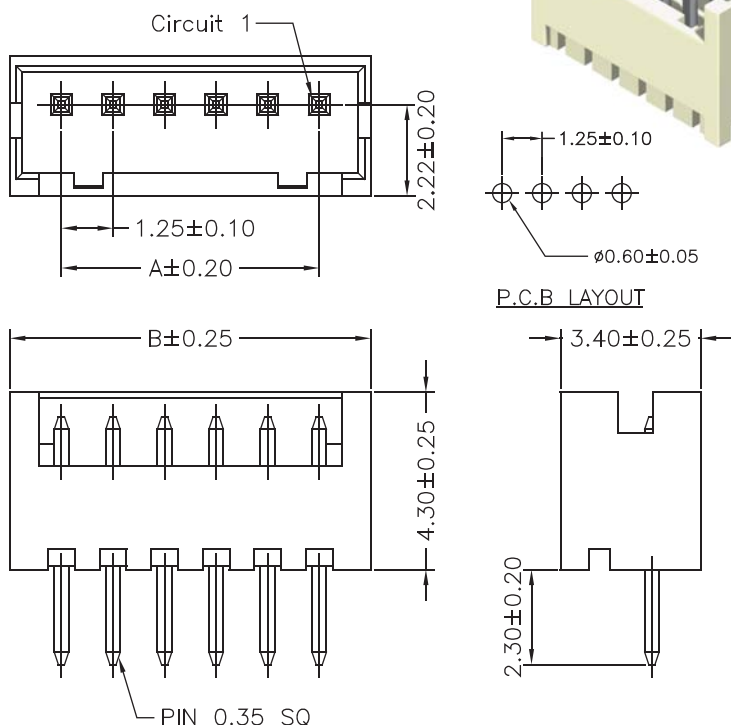

Part No.:1252S-XTW-L