


- High temperature insulator with standoffs is compatible with standard automatic insertion equipment.
- Soft copper alloy machined pins allows clinching.
- Chamfered contact entry allows for ease of IC insertion without bent leads.
- Uses M-M#1005 pin with #30 clip rated at 3 amps. See page 135 for pin details.

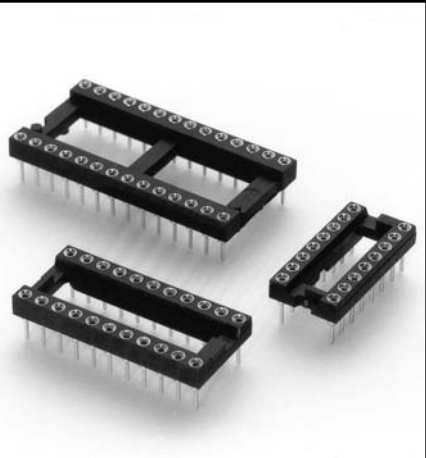

<b>Total number of pins</b>				<b>Quantity per tube</b>	<b>Ordering Information</b>
	<b>A</b>	<b>B</b>	<b>C</b>		

Total number of pins	A	B	C	Quantity per tube	Ordering Information
6	0.3	0.3	0.4	67	110-93-306-41-605
8	0.4	0.3	0.4	50	110-93-308-41-605
14	0.7	0.3	0.4	28	110-93-314-41-605
16	0.8	0.3	0.4	25	110-93-316-41-605
18	0.9	0.3	0.4	22	110-93-318-41-605
20	1.0	0.3	0.4	20	110-93-320-41-605
24	1.2	0.3	0.4	16	110-93-324-41-605
22	1.1	0.4	0.5	18	110-93-422-41-605
24	1.2	0.6	0.7	16	110-93-624-41-605
28	1.4	0.6	0.7	14	110-93-628-41-605
32	1.6	0.6	0.7	12	110-93-632-41-605
40	2.0	0.6	0.7	10	110-93-640-41-605

PLATING CODE =			<b>93</b>	
Sleeve (Pin)			200μ" Sn/Pb	
Contact (Clip)			30μ" Au	