
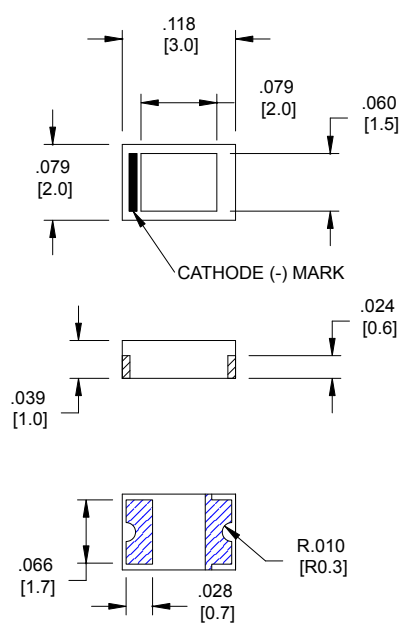


LTR	REVISION	DATE	APPD
C	REVISED PER ECR 081798-SA02	08-17-98	SA
D	REVISED PER ECR 052803-JH01	05-30-03	WB
E	REVISED PER ECR 011204-JH02	01-22-04	WB

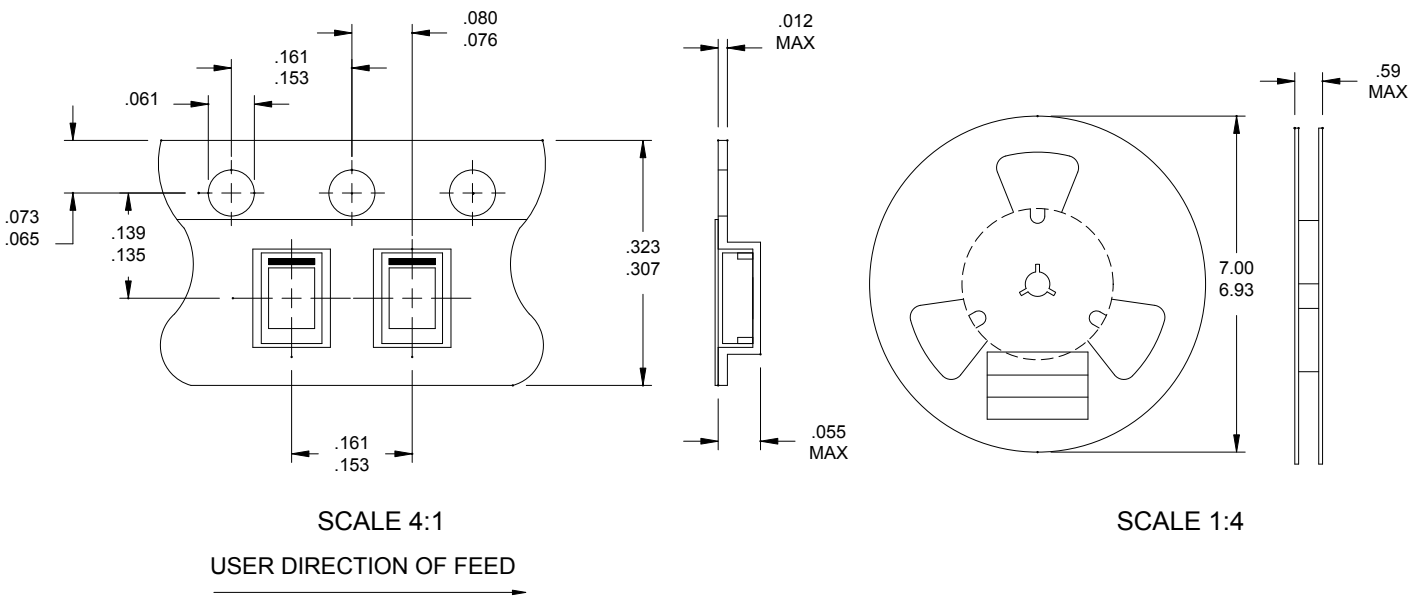

LEDTRONICS PART NO.	L.E.D. RADIATION COLOR	ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)				
		If=mA typ	Iv mcd typ	Vf=V typ/max	VIEW ANGLE	λP nm
SML1004C-TR	ORANGE	20	18	2.0/2.6	125	610
SML10G4C-TR	HI-EFF GREEN	20	20	2.2/2.5	125	565
SML10Y4C-TR	YELLOW	20	12.5	2.1/2.5	125	580
SML10PG4C-TR	PURE GREEN	20	1.8	2.2/2.6	125	555

- NOTES:
- 7 INCH REEL - 3000 PIECES PER REEL.
  - THE CATHODE IS ORIENTED TOWARDS THE TAPE SPROCKET HOLES.

<p><b>LEDTRONICS, INC.®</b> 23105 KASHIWA COURT TORRANCE, CA 90505</p>	<p align="center"><b>-PROPRIETARY-</b> This document contains Proprietary information of LEDTRONICS, INC.™ It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.™</p> <p>XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°, 30' FRACT. ± 1/32</p>	<p align="center"><b>TITLE</b> SML10X4C-TR</p>			
		DWG NO	SCALE	SHEET	DATE
		DSTR0016	5:1	1 OF 1	05-21-96
CODE IDENT NO.	DWG BY	CHK BY	QA JCH	MFG SB	CUSTOMER
8Z410	SMA		02-04-04	01-29-04	