


Dimensions (mm)		
Pos.	A	B
2	2.5	5.5
3	5.0	8.0
4	7.5	10.5
5	10.0	13.0
6	12.5	15.5
7	15.0	18.0
8	17.5	20.5
9	20.0	23.0
10	22.5	25.5
11	25.0	28.0
12	27.5	30.5
13	30.0	33.0
14	32.5	35.5
15	35.0	38.0


2, 3



4 ~ 6





7 ~ 15

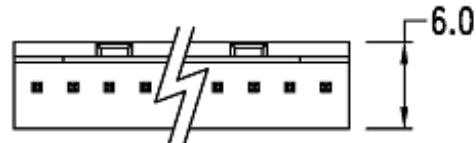


SPECIFICATIONS:

Current rating: 3 amps AC/DC
 Voltage rating: 250VAC/VDC
 Contact material: .025"(0.64mm) square pin
 Contact plating: Tin
 Contact resistance: 20 milliohms max.
 Insulator material: Nylon 66, UL94V-0
 Standard color: Orange
 Withstanding: 800 VAC for 1 min.
 Operating temperature: -25°C to +85°C




Recommended P.C.B. thickness: .063"(1.6mm)



P. C. board hole dimensions

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		



Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-A-2522-XX**

Description: Header, .098"(2.5mm) pitch, vertical

1

2

3

4

5

6

7

8

9