

Handwritten: Kingbright
K14
0.5500

Kingbright Electronic Co., Ltd.




Mail Address: P. O. Box 81-153 Taipei, Taiwan
Telex No. : 22249 TWNKIN

FAX : (2) 7162041
Telephones : 715-2848 • 713-0682


T1 3/4 (5MM) ROUND LED LAMP

L-53-125

UNIT: MM
TOLERANCE: ±0.2



Handwritten: New

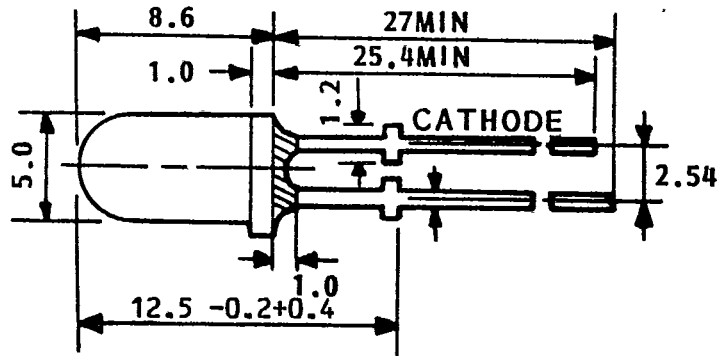

SELECTION GUIDE

PART NO.	SOURCE (DICE)	LENSE TYPE (RESIN)	AXIAL LUMINOUS INTENSITY IN MCD @ 20mA		VIEWING ANGLE
			MIN	TYP	
✓ L-53RD-125	RED (GaAsP)	Red Diffused	0.8	1.5	140°
✓ L-53RW-125		White Diffused	0.8	1.5	140°
✓ L-53RT-125		Red Transparent	2.0	7.0	90°
✓ L-53RC-125		Water Clear	2.0	7.0	90°
✓ L-53HD-125	RED HIGH EFFICIENCY (GaP)	Red Diffused	10mA 1.0	2.0	140°
✓ L-53HT-125		Red Transparent	2.0	7.0	90°
✓ L-53HC-125		Water Clear	2.0	7.0	90°
✓ L-53ID-125	RED HIGH INTENSITY (GaAsP/GaP)	Red Diffused	5.0	8.0	140°
✓ L-53IT-125		Red Transparent	20.0	30.0	90°
✓ L-53ED-125	ORANGE (GaAsP/GaP)	Orange Diffused	5.0	8.0	140°
✓ L-53EW-125		White Diffused	5.0	8.0	140°
✓ L-53ET-125		Orange Trans.	20.0	30.0	90°
✓ L-53EC-125		Water Clear	20.0	30.0	90°
✓ L-53YD-125	YELLOW (GaAsP/GaP)	Yellow Diffused	5.0	8.0	140°
✓ L-53YW-125		White Diffused	5.0	8.0	140°
✓ L-53YT-125		Yellow Trans.	30.0	50.0	90°
✓ L-53YC-125		Water Clear	30.0	50.0	90°
✓ L-53GD-125	GREEN (GaP)	Green Diffused	4.0	8.0	140°
✓ L-53GW-125		White Diffused	4.0	8.0	140°
✓ L-53GT-125		Green Trans.	20.0	35.0	90°
✓ L-53GC-125		Water Clear	20.0	35.0	90°
✓ L-53AD-125	AMBER (GaAsP/GaP)	Amber Diffused	5.0	8.0	140°
✓ L-53AT-125		Amber Trans.	30.0	50.0	90°