
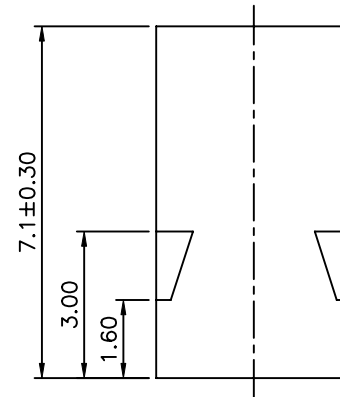
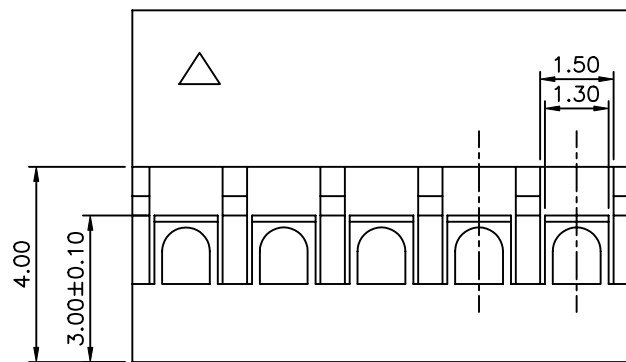
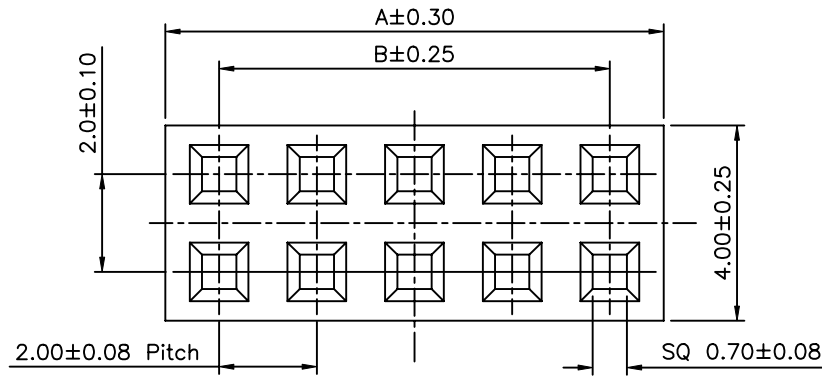


SPECIFICATION

Current Rating:1A AC/DC
 Voltage Rating:200V AC/DC
 Withstanding Voltage:650V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Material:PBT+15%GF UL94V-0,Black
 RoHS Compliant

Pin	A	B
4	4.40	2.0
6	6.40	4.0
8	8.40	6.0
10	10.40	8.0
12	12.40	10.0
14	14.40	12.0
16	16.40	14.0
18	18.40	16.0
20	20.40	18.0
22	22.40	20.0
24	24.40	22.0
26	26.40	24.0
28	28.40	26.0
30	30.40	28.0
32	32.40	30.0
34	34.40	32.0
36	36.40	34.0
38	38.40	36.0
40	40.40	38.0
42	42.40	40.0
44	44.40	42.0
46	46.40	44.0
48	48.40	46.0
50	50.40	48.0
52	52.40	50.0
54	54.40	52.0
56	56.40	54.0
58	58.40	56.0
60	60.40	58.0
62	62.40	60.0
64	64.40	62.0

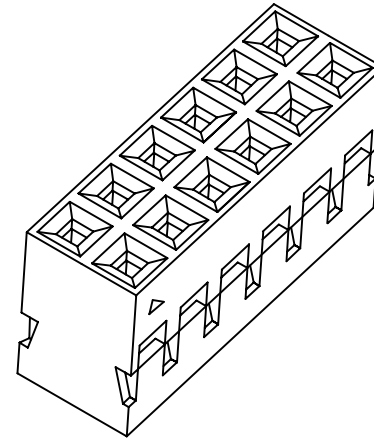

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
PART No. MPV2XXX-H		MEI		
DRAWING No. MPV2XXX-H		CHECKED BY HZF		.X ±0.25 .X* ±2*
SCALE NONE		DRAWING BY XYH		.XX ±0.20 .XX* ±1*
REV. 6		BO		.XXX ±0.10

UNIT mm	BO	NEW RELEASE	HZF	03/03/2009
NO.	REV.	REVISIONS	CHK	DATE