

## High Performance Pentium® 4 Clock Synthesizer


### Features

- Supports Pentium® 4 type CPUs
- 3.3 Volt Power supply
- 10 copies of PCI clocks
- 3 differential CPU clocks
- SMBus Support with read back capabilities
- Spread Spectrum EMI Reduction
- Dial-a-Frequency™ features
- Dial-a-dB™ features
- 56 Pin SSOP and TSSOP package

**Table 1.**

S2	S1	S0	CPU (0:2)	3V66	66BUFF(0:2)/3V66(0:4)	66IN/3V66-5	PCI_F PCI	REF	USB/DOT
1	0	0	66M	66M	66IN	66MHz clock input	66IN/2	14.318M	48M
1	0	1	100M	66M	66IN	66MHz clock input	66IN/2	14.318M	48M
1	1	0	200M	66M	66IN	66MHz clock input	66IN/2	14.318M	48M
1	1	1	133M	66M	66IN	66MHZ clock input	66IN/2	14.318M	48M
0	0	0	66M	66M	66M	66M	33 M	14.318M	48M
0	0	1	100M	66M	66M	66M	33 M	14.318M	48M
0	1	0	200M	66M	66M	66M	33 M	14.318M	48M
0	1	1	133M	66M	66M	66M	33 M	14.318M	48M
M	0	0	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Hi-Z
M	0	1	TCLK/2	TCLK/4	TCLK/4	TCLK/4	TCLK/8	TCLK	TCLK/2
M	1	0	150M	50M	50M	50M	25M	14.318M	48M
M	1	1	166.6M	55.5M	55.5M	55.5M	27.7M	14.318M	48M
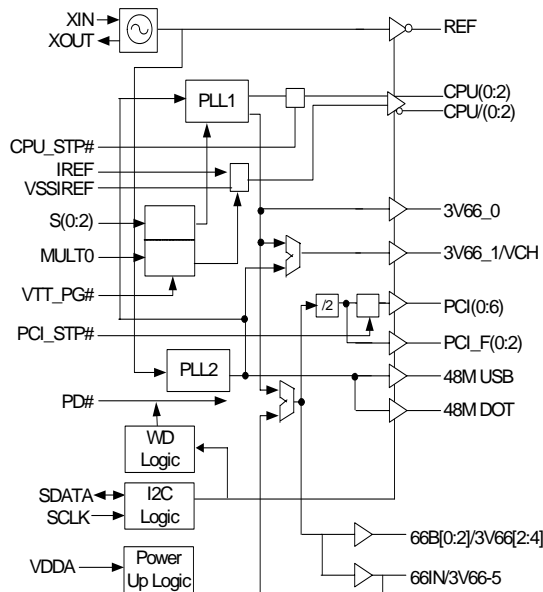
### Block Diagram



### Pin Configuration

VDD	<input type="checkbox"/>	1	REF	<input type="checkbox"/>	56
XIN	<input type="checkbox"/>	2	S1	<input type="checkbox"/>	55
XOUT	<input type="checkbox"/>	3	S0	<input type="checkbox"/>	54
VSS	<input type="checkbox"/>	4	CPU_STP#	<input type="checkbox"/>	53
PCIF0	<input type="checkbox"/>	5	CPU0	<input type="checkbox"/>	52
PCIF1	<input type="checkbox"/>	6	CPU1	<input type="checkbox"/>	51
PCIF2	<input type="checkbox"/>	7	VDD	<input type="checkbox"/>	50
VDD	<input type="checkbox"/>	8	CPU1	<input type="checkbox"/>	49
VSS	<input type="checkbox"/>	9	CPU1	<input type="checkbox"/>	48
PCI0	<input type="checkbox"/>	10	VSS	<input type="checkbox"/>	47
PCI1	<input type="checkbox"/>	11	VDD	<input type="checkbox"/>	46
PCI2	<input type="checkbox"/>	12	CPU2	<input type="checkbox"/>	45
PCI3	<input type="checkbox"/>	13	CPU2	<input type="checkbox"/>	44
VDD	<input type="checkbox"/>	14	MULT0	<input type="checkbox"/>	43
VSS	<input type="checkbox"/>	15	IREF	<input type="checkbox"/>	42
PCI4	<input type="checkbox"/>	16	VSSIREF	<input type="checkbox"/>	41
PCI5	<input type="checkbox"/>	17	S2	<input type="checkbox"/>	40
PCI6	<input type="checkbox"/>	18	48MUSB	<input type="checkbox"/>	39
VDD	<input type="checkbox"/>	19	48MDOT	<input type="checkbox"/>	38
VSS	<input type="checkbox"/>	20	VDD	<input type="checkbox"/>	37
66B0/3V66_2	<input type="checkbox"/>	21	VSS	<input type="checkbox"/>	36
66B1/3V66_3	<input type="checkbox"/>	22	3V66_1/VCH	<input type="checkbox"/>	35
66B2/3V66_4	<input type="checkbox"/>	23	PCI_STP#	<input type="checkbox"/>	34
66IN/3V66_5	<input type="checkbox"/>	24	3V66_0	<input type="checkbox"/>	33
PD#	<input type="checkbox"/>	25	VDD	<input type="checkbox"/>	32
VDDA	<input type="checkbox"/>	26	VSS	<input type="checkbox"/>	31
VSSA	<input type="checkbox"/>	27	SCLK	<input type="checkbox"/>	30
VTT_PG#	<input type="checkbox"/>	28	SDATA	<input type="checkbox"/>	29

**Pin Description**

Pin No.	Name	PWR	I/O	Description
2	XIN		I	Oscillator Buffer Input. Connect to a crystal or to an external clock.
3	XOUT	VDD	O	Oscillator Buffer Output. Connect to a crystal. Do not connect when an external clock is applied at XIN.
52, 51, 49, 48, 45, 44	CPU, CPU/ (0:2)	VDD	O	Differential host output clock pairs. See the frequency table on page one of this data sheet for frequencies and functionality.
10, 11, 12, 13, 16, 17, 18	PCI(0:6)	VDDP	O	PCI Clock Outputs. Are synchronous to 66IN or 3V66 clock. See Frequency Table on page one of this data sheet.
5, 6, 7	PCIF (0:2)	VDD	O	33Mhz PCI clocks, which are $\pm 2$ copies of 66IN or 3V66 clocks, may be free running (not stopped when PCI_STP# is asserted low) or may be stoppable depending on the programming of SMBus register Byte3, Bits (3:5).
56	REF	VDD	O	Buffered Output copy of the device's XIN clock.
42	IREF	VDD	I	Current reference programming input for CPU buffers. A resistor is connected between this pin and VSSIREF. See CPU Clock current Select Table in page 18 of this data sheet.
28	VTT_PG#	VDD	I	Qualifying input that latches S (0:2) and MULT0. When this input is at a logic low, the S (0:2) and MULT0 are latched
39	48MUSB	VDD48	O	Fixed 48MHz USB Clock Outputs.
38	48MDOT	VDD48	O	Fixed 48MHZ DOT Clock Outputs.
33	3V66_0	VDD	O	3.3 Volt 66 MHz fixed frequency clock.
35	3V66_1/VCH	VDD	O	3.3 volt clock selectable with SMBus byte0, Bit5, when Byte5, Bit5. When Byte 0 Bit 5 is at a logic 1, then this pin is a 48M output clock. When byte0, Bit5 is a logic 0, then this is a 66M output clock (default).
25	PD#	VDD	I PU	This pin is a power down mode pin. A logic low level causes the device to enter a power down state. All internal logic is turned off except for the SMBus logic. All output buffers are stopped. See the Power Down section of this data sheet.
43	MULT0		I PU	Programming input selection for CPU clock current multiplier. See CPU Clock Current Select Function Table.
55, 54	S(0,1)	I	I	Frequency Select Inputs. See Frequency Table on page 1.
29	SDATA	I	I	Serial Data Input. Conforms to the SMBus specification of a Slave Receive/Transmit device. It is an input when receiving data. It is an open drain output when acknowledging or transmitting data. See application note AN-0022
30	SCLK	I	I	Serial Clock Input. Conforms to the SMBus specification. See application note AN-0022.
40	S2	VDD	I T	Frequency Select input. See Frequency Table on page 1. This is a Tri level input, which is driven high, low or driven to an intermediate level.
34	PCI_STP#	VDD	I PU	PCI Clock Disable Input. When asserted low, PCI (0:6) clocks are synchronously disabled in a low state. This pin does not effect PCIF (0:2) clocks' outputs if they are programmed to be PCIF clocks via the device's SMBus interface.
53	CPU_STP#	VDD	I PU	CPU Clock Disable Input. When asserted low, CPU (0:2) clocks are synchronously disabled in a high state and CPU/(0:2) clocks are synchronously disabled in a low state.
24	66IN/3V66_5	VDD	I/O	Input connection for 66CLK(0:2) output clock buffers if S2 = 1, or output clock for fixed 66 MHz clock if S2=0. See table on page 1
21, 22, 23	66B(0:2)/ 3V66(2:4)	VDD	O	3.3 volt clock outputs. These clocks are buffered copies of the 66IN clock or fixed at 66 MHz. See table on page 1

**Pin Description**

1, 8, 14, 19, 32, 37, 46, 50	VDD		PWR	3.3V Power Supply
4, 9, 15, 20, 27, 31, 36, 47	VSS		PWR	Common Ground
41	VSSIREF		PWR	Current reference programming input for CPU buffers. A resistor is connected between this pin and IREF. See CPU Clock current Select Table in page 18 of this data sheet. This pin should also be returned to device VSS.
26	VDDA	-	PWR	Analog power input. Used for PLL and internal analog circuits. Is also specifically used to detect and determine when power is at an acceptable level to enable the device to operate.

PU = Internal Pull-Up. PD = Internal Pull-Down. T = Tri level logic input with valid logic voltages of LOW=<0.8V, T=1.0-1.8V and HIGH=>2.0V

**Note:** The Pin# column lists the relevant pin number where applicable. The @Pup column gives the default state at power up.

**2-Wire SMBus Control Interface**

The 2-wire control interface implements a read/write slave only interface according to SMBus specification. (See IMI Application Note AN-0022).

The device will accept data written to the D2 address and data may read back from address D3. It will not respond to any other addresses, and previously set control registers are retained as long as power in maintained on the device.

**Byte 0: CPU Clock Register**

Bit	@Pup	Pin#	Description
7	0		Spread Spectrum Enable 0 = Spread Off, 1 = Spread On This is a Read and Write control bit.
6	0		Reserved
5	0	35	3V66_1/VCH frequency Select 0 = 66M selected, 1 = 48M selected This is a Read and Write control bit.
4	Pin 53	44,45,48,49,51,52	CPU_STP#. Reflects the current value of the external CPU_STP# (pin 53) This bit is Read Only.
3	Pin 34	10,11,12,13,16,17,18	Reflects the current value of the internal PCI_STP# function when read. Internally PCI_STP# is a logical AND function of the internal SMBus register bit and the external PCI_STP# pin.
2	Pin 40		Frequency Select Bit 2. Reflects the value of SEL2 (pin 40). This bit is Read Only.
1	Pin 55		Frequency Select Bit 1. Reflects the value of SEL1 (pin 55). This bit is Read Only.
0	Pin 54		Frequency Select Bit 0. Reflects the value of SEL0 (pin 54). This bit is Read Only.

**Serial Control Registers**

Following the acknowledge of the Address Byte, two additional bytes must be sent:

1. "**Command Code**" byte, and
2. "**Byte Count**" byte.

Although the data (bits) in the command is considered "don't care"; it must be sent and will be acknowledged.

After the Command Code and the Byte Count have been acknowledged, the sequence (Byte 0, Byte 1, and Byte 2) described below will be valid and acknowledged.

**Byte 1: CPU Clock Register**

Bit	@Pup	Pin#	Description
7	Pin 43	44,45	MULT0 (Pin 43) Value. This bit is Read Only.
6	0	48,49	Reserved
5	0	51,52	Controls CPU2 functionality when CPU_STP# is asserted LOW 1 = Free Running, 0 = Stopped LOW with CPU_STP# asserted LOW This is a Read and Write control bit.
4	0	44,45	Controls CPU1 functionality when CPU_STP# is asserted LOW 1 = Free Running, 0 = Stopped LOW with CPU_STP# asserted LOW This is a Read and Write control bit.
3	0	48,49	Controls CPU0 functionality when CPU_STP# is asserted LOW 1 = Free Running, 0 = Stopped LOW with CPU_STP# asserted LOW This is a Read and Write control bit.
2	1	51,52	CPU2 Output Control, 1 = enabled, 0 = disable HIGH and CPU/2 disables LOW This is a Read and Write control bit.
1	1	44,45	CPU1 Output Control, 1 = enabled, 0 = disable HIGH and CPU/1 disables LOW This is a Read and Write control bit.
0	1	48,49	CPU0 Output Control, 1 = enabled, 0 = disable HIGH and CPU/0 disables LOW This is a Read and Write control bit.

**Byte 2: CPU Clock Register (all bits are read and write functional )**

Bit	@Pup	Pin#	Description
7	1	18	PCI6 Output Control 1 = enabled, 0 = forced LOW
6	1	17	PCI5 Output Control 1 = enabled, 0 = forced LOW
5	1	16	PCI4 Output Control 1 = enabled, 0 = forced LOW
4	1	13	PCI3 Output Control 1 = enabled, 0 = forced LOW
3	1	12	PCI2 Output Control 1 = enabled, 0 = forced LOW
2	1	11	PCI1 Output Control 1 = enabled, 0 = forced LOW
1	1	10	PCI0 Output Control 1 = enabled, 0 = forced LOW
0	1	18	PCI6 Output Control 1 = enabled, 0 = forced LOW

**Byte 3: PCI\_F Clock and 48M Control Register (all bits are read and write functional )**

Bit	@Pup	Pin#	Description
7	1	38	48MDOT Output Control 1 = enabled, 0 = forced LOW
6	1	39	48MUSB Output Control 1 = enabled, 0 = forced LOW
5	0	7	PCI_STP#, control of PCI_F2. 0 = Free Running, 1 = Stopped when PCI_STP# is LOW
4	0	6	PCI_STP#, control of PCI_F1. 0 = Free Running, 1 = Stopped when PCI_STP# is LOW
3	0	5	PCI_STP#, control of PCI_F0. 0 = Free Running, 1 = Stopped when PCI_STP# is LOW

**Byte 3: PCI\_F Clock and 48M Control Register (all bits are read and write functional )**

2	1	7	PCI_F2 Output Control 1=running, 0=forced LOW
1	1	6	PCI_F1 Output Control 1= running, 0=forced LOW
0	1	5	PCI_F0 Output Control 1= running, 0=forced LOW

**Byte 4: DRCG Control Register**

Bit	@Pup	Pin#	Description
7	0	-	SS2 Spread Spectrum control bit (0=down spread, 1=Center spread)
6	0	-	Reserved
5	1	33	3V66_0 Output Enabled 1 = enabled, 0 = disabled
4	1	35	3V66_1/VCH Output Enable 1 = enabled, 0 = disabled
3	1	24	3V66_5 Output Enable 1 = enabled, 0 = disabled
2	1	23	66B2/3V66_4 Output Enabled 1 = enabled, 0 = disabled
1	1	22	66B1/3V66_3 Output Enabled 1 = enabled, 0 = disabled
0	1	21	66B0/3V66_2 Output Enabled 1 = enabled, 0 = disabled

**Byte 5:Clock control register (all bits are read and write functional )**

Bit	@Pup	Pin#	Description
7	0	-	SS1 Spread Spectrum control bit
6	1	-	SS0 Spread Spectrum control bit
5	0	-	66IN to 66M delay Control MSB, See table
4	0	-	66IN to 66M delay Control LSB, See table
3	0	-	Reserved
2	0	-	48MDOT edge rate control. When set to 1, the edge is slowed by 15%.
1	0	-	Reserved
0	0	-	USB edge rate control. When set to 1, the edge is slowed by 15%

**Byte 6:Silicon Signature Register (all bits are read only )**

Bit	@Pup	Pin#	Description
7	0	-	Vendor Code 001
6	0	-	
5	0	-	
4	0	-	
3	0	-	
2	0	-	
1	1	-	
0	1	-	

**Note that** when writing to this register the device will acknowledge the write operation, but the data itself will be ignored.

**Byte 7: Watch Dog Time Stamp Register**

Bit	@Pup	Pin#	Description
7	0	-	Reserved
6	0	-	Reserved
5	0	-	Reserved
4	0	-	Reserved
3	0	-	Reserved
2	0	-	Reserved
1	0	-	Reserved
0	0	-	Reserved

**Byte 8: Dial-a-Frequency™ Control Register N (all bits are read and write functional)**

Bit	@Pup	Pin#	Description
7	0	0	N7, MSB
6	0	0	N6
5	0	0	N5
4	0	0	N4
3	0	0	N3
2	0	0	N2
1	0	0	N3
0	0	0	N0, LSB

**Byte 9: Dial-a-Frequency™ Control Register R (all bits are read and write functional)**

Bit	@Pup	Pin#	Description
7	0	-	R6 MSB
6	0	-	R5
5	0	-	R4
4	0	-	R3
3	0	-	R2
2	0	-	R1
1	0	-	R0, LSB
0	0	-	R and N register load gate 0=gate closed (data is latched), 1=gate open (data is loading from SMBus registers into R and N)

**Table 2. 66IN to 66M Delay Control Table**

Byte 5		Delay (ns)
Bit 5	Bit 4	
0	0	4.29
0	1	4.43
1	0	3.95 (default)
1	1	3.95

### Dial-a-Frequency™ Feature

SMBus Dial-a-frequency feature is available in this device via Byte8 and Byte9. See our App Note AN-0025 for details on our Dial-a-Frequency™ feature.

P is a large value PLL constant that depends on the frequency selection achieved through the hardware selectors (S1, S0). P value may be determined from the following table.

**Table 3.**

S(1:0)	P
0 0	32005333
0 1	48008000
1 0	96016000
1 1	64010667

### Dial-a-dB™ Features

SMBus Dial-a-dB™ feature is available in this device via Byte8 and Byte9. See our App Note AN-0026 for details on the Dial-a-dB™.

### Spread Spectrum Clock Generation (SSCG)

Spread Spectrum is a modulation technique used to minimizing Electro-Magnetic Interference (EMI) radiation generated by repetitive digital signals. A clock presents the greatest EMI energy at the center frequency it is generating. Spread Spectrum distributes this energy over a specific and controlled frequency bandwidth therefore causing the average energy at any one point in this band to decrease in value. This technique is achieved by modulating the clock away from its resting frequency by a certain percentage (which also determines the amount of EMI reduction). In this device, Spread Spectrum is enabled by setting specific register bits in the SMBus control Bytes. See applications note AN-0024 for a more in depth description of Spread spectrum modulation and see the SMBus register section of this data sheet for the exact bit and byte functionally. The following table is a listing of the modes and percentages of Spread Spectrum modulation that this device incorporates.

**Table 4. Spread Spectrum Table**

SS2	SS1	SS0	Spread Mode	Spread %
0	0	0	Down	+0.00, -0.25
0	0	1	Down	+0.00, -0.50
0	1	0	Down	+0.00, -0.75
0	1	1	Down	+0.00 -1.00
1	0	0	Center	+0.13, -0.13
1	0	1	Center	+0.25, -0.25
1	1	0	Center	+0.37, -0.37
1	1	1	Center	+0.50 -1.50

### AC Parameters

Parameter	Description	66 MHz		100 MHz		133 MHz		200 MHz		Unit	Notes
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.		
TDC	Xin Duty Cycle	47.5	52.5	47.5	52.5	47.5	52.5	47.5	52.5	%	1, 11, 14
TPeriod	Xin period	69.841	71.0	69.841	71.0	69.841	71.0	69.841	71.0	nS	1, 2, 4, 11
VHIGH	Xin High Voltage	.7Vdd	Vdd	.7Vdd	Vdd	.7Vdd	Vdd	.7Vdd	Vdd	Volts	
VLOW	Xin Low Voltage	0	.3Vdd	0	.3Vdd	0	.3Vdd	0	.3Vdd	Volts	
Tr / Tf	Xin rise and fall times	-	10.0	-	10.0	-	10.0	-	10.0	nS	13
TCCJ	Xin Cycle to Cycle Jitter	-	500	-	500	-	500	-	500	pS	2, 5, 11

**AC Parameters**

<b>CPU at 0.7 Volts Timing</b>											
TSKEW	Any CPU to CPU clock Skew	-	100	-	100	-	100	-	100	pS	2, 5, 17
TCCJ	CPU Cycle to Cycle Jitter	-	150	-	150	-	150	-	150	pS	2, 17, 22
TDC	CPU and CPU# Duty Cycle	45	55	45	55	45	55	45	55	%	5, 17, 22
TPeriod	CPU and CPU# period	14.85	15.3	9.85	10.2	7.35	7.65	4.85	5.1	nS	5, 17, 22
Tr / Tf	CPU and CPU# rise and fall times	175	700	175	700	175	700	175	700	ps	5, 6, 25
	Rise.Fall Matching	-	20%	-	20%	-	20%	-	20%	-	6, 21, 22
DeltaTr	Rise Time Variation	-	125	-	125	-	125	-	125	ps	6, 22
DeltaTf	Fall Time Variation	-	125	-	125	-	125	-	125	ps	6, 22
Vcross	crossing point voltage at 0.7 V swing	280	430	280	430	280	430	280	430	mV	5, 22
<b>CPU at 1.0 Volts Timing</b>											
TSKEW	Any CPU to any CPU clock Skew	-	100	-	100	-	100	-	100	pS	2, 5, 17
TCCJ	CPU Cycle to Cycle Jitter	-	150	-	150	-	150	-	150	pS	2, 17
TDC	CPU and CPU# Duty Cycle	45	55	45	55	45	55	45	55	%	5, 17
TPeriod	CPU and CPU# period	14.85	15.3	9.85	10.2	7.35	7.65	4.85	5.1	nS	5, 17
Differential Tr / Tf	CPU and CPU# rise and fall times	175	467	175	467	175	467	175	467	ps	5, 25
SE-DeltaSlew	Absolute Single-ended rise/fall waveform symmetry	-	325	-	325	-	325	-	325	ps	7, 26
Vcross	Cross point at 1.0 Volt swing	-	100	-	100	-	100	-	100	pS	2, 5, 17
TPeriod	3V66 Duty Cycle	45	55	45	55	45	55	45	55	%	2, 4
THIGH	3V66 period	15.0	15.3	15.0	15.3	15.0	15.3	15.0	15.3	nS	1, 2, 4
TLOW	3V66 high time	4.95	-	4.95	-	4.95	-	4.95	-	nS	19
Tr / Tf	3V66 low time	4.55	-	4.55	-	4.55	-	4.55	-	nS	20
Tskew Unbuffered	3V66 rise and fall times	0.5	2.0	0.5	2.0	0.5	2.0	0.5	2.0	nS	3
Tskew Buffered	3V66 to 3V66 clock skew	-	500	-	500	-	500	-	500	pS	2, 4
TCCJ	3V66 to 3V66 clock skew	-	250	-	250	-	250	-	250	pS	2, 4



**AC Parameters**

TPeriod	DRCG Cycle to Cycle Jitter	-	250	-	250	-	250	-	250	pS	2, 4
THIGH	3V66 Duty Cycle	45	55	45	55	45	55	45	55	%	2, 4
TDC	66B(0:2) Duty Cycle	45	55	45	55	45	55	45	55	%	2, 4
Tr / Tf	66B(0:2) rise and fall times	0.5	2.0	0.5	2.0	0.5	2.0	0.5	2.0	nS	2, 3
TSKEW	Any 66B to any 66B Skew	-	175	-	175	-	175	-	175	pS	2, 4
Tpd	66IN to 66B(0:2) propagation delay	2.5	4.5	2.5	4.5	2.5	4.5	2.5	4.5	nS	2, 4
TCCJ	66B(0:2) Cycle to Cycle Jitter	-	100	-	100	-	100	-	100	pS	2, 4, 18
TDC	PCI_F(0:2) PCI (0:6) Duty Cycle	45	55	45	55	45	55	45	55	%	2, 4
TPeriod	PCI_F(0:2) PCI (0:6) period	30.0	-	30.0	-	30.0	-	30	-	nS	1, 2, 4
THIGH	PCI_F(0:2) PCI (0:6) high time	12.0	-	12.0	-	12.0	-	12.0	-	nS	19
TLOW	PCI_F(0:2) PCI (0:6) low time	12.0	-	12.0	-	12.0	-	12.0	-	nS	20
Tr / Tf	PCI_F(0:2) PCI (0:6) rise and fall times	0.5	2.0	0.5	2.0	0.5	2.0	0.5	2.0	nS	3
TSKEW	Any PCI clock to Any PCI clock Skew	-	500	-	500	-	500	-	500	pS	2, 4
TCCJ	PCI_F(0:2) PCI (0:6) Cycle to Cycle Jitter	-	250	-	250	-	250	-	250	pS	2, 4
TDC	USB48M Duty Cycle	45	55	45	55	45	55	45	55	%	2, 4
TPeriod	USB48M period	20.8299	20.8333	20.8299	20.8333	20.8299	20.8333	20.8299	20.8333	nS	2, 4
Tr / Tf	USB48M rise and fall times	1.0	2.0	1.0	2.0	1.0	2.0	1.0	2.10	nS	2, 3
TCCJ	USB48M Cycle to Cycle Jitter	-	350	-	350	-	350	-	350	pS	1, 2, 4
TDC	DOT48 Duty Cycle	45	55	45	55	45	55	45	55	%	2, 4
TPeriod	DOT48 period	20.837		20.837		20.837		20.837		nS	2, 4
Tr / Tf	DOT48 rise and fall times	0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0	nS	2, 4
TCCJ	DOT48 Cycle to Cycle Jitter	-	350	-	350	-	350	-	350	pS	2, 4
TDC	REF Duty Cycle	45	55	45	55	45	55	45	55	%	2, 4

**AC Parameters**

TPeriod	REF period	69.8413	71.0	69.8413	71.0	69.8413	71.0	69.8413	71.0	nS	2, 4
Tr / Tf	REF rise and fall times	1.0	4.0	1.0	4.0	1.0	4.0	1.0	4.0	nS	2, 3
TCCJ	REF Cycle to Cycle Jitter	-	1000	-	1000	-	1000	-	1000	pS	2, 4
tpZL, tpZH	Output enable delay (all outputs)	1.0	10.0	1.0	10.0	1.0	10.0	1.0	10.0	nS	11
tpLZ, tpZH	Output disable delay (all outputs)	1.0	10.0	1.0	10.0	1.0	10.0	1.0	10.0	nS	11
tstable	All clock Stabilization from power-up	-	3	-	3	-	3	-	3	mS	11
tss	Stopclock Set Up Time	10.0	-	10.0	-	10.0	-	10.0	-	nS	10
tsh	Stopclock Hold Time	0	-	0	-	0	-	0	-	nS	10
tsu	Oscillator startup time	-	X	-	X	-	X	-	X	mS	12

**Notes:**

1. This parameter is measured as an average over 1uS duration, with a crystal center frequency of 14.31818MHz
2. All outputs loaded as per table 5 below.
3. Probes are placed on the pins, and measurements are acquired between 0.4V and 2.4V for 3.3V signals (see test and measurement setup section of this data sheet)
4. Probes are placed on the pins, and measurements are acquired at 1.5V for 3.3V signals (see test and measurement setup section of this data sheet).
5. This measurement is applicable with Spread ON or Spread OFF.
6. Measured from  $V_{ol} = 0.175V$  to  $V_{oh} = 0.525V$ .
7. Measurements taken from common mode waveforms, measure rise/fall time from 0.41 to 0.86V. Rise/fall time matching is defined as "the instantaneous difference between maximum clk rise (fall) and minimum clk# fall (rise) time, or minimum clk rise (fall) and maximum clk# fall (rise) time". This parameter is designed form waveform symmetry.
8. The time specified is measured from when all VDD's reach their supply rail (3.3V) till the frequency output is stable and operating within the specifications.
9. Measured from when both SEL1 and SEL0 are low
10. CPU\_STP# and PCI\_STP# setup time with respect to any PCI\_F clock to guarantee that the effected clock will stop or start at the next PCI\_F clock's rising edge.
11. When Xin is driven from an external clock source.
12. When Crystal meets minimum 40 ohm device series resistance specification.
13. Measured between 0.2V<sub>dd</sub> and .7V<sub>dd</sub>
14. This is required for the duty cycle on the REF clock out to be as specified. The device will operate reliably with input duty cycles up to 30/70 but the REF clock duty cycle will not be within data sheet specifications.
15.  $V_{pullup(external)} = 1.5V$ ,  $Min = (V_{pullup(external)}/2) - 150mV$ ,  $Max = (V_{pullup(external)}/2) + 150mV$
16.  $V_p = V_{pull-up(external)}$ ,  $V_{dif}$  specifies the minimum input differential voltage ( $V_{tr} - V_{cp}$ ) required for switching, where  $V_{tr}$  is the true input level and  $V_{cp}$  os the compliment input level.
17. Measured at crossing point ( $V_x$ ) or where subtraction of CLK-CLK# crosses 0 volts.
18. This figure is additive to any jitter already present when the 66IN pin is being used as an input. Otherwise a 500 ps jitter figure is specified.
19. THIGH is measured at 2.4V for non host outputs.
20. TLOW is measured at 0.4V for all outputs.
21. Determined as a fraction of  $2 * (Trise - Tfall) / (Trise + Tfall)$ .
22. Test load is  $R_{ta} = 33.2$  ohms,  $R_d = 49.9$  ohms.
23. These crossing points refer to only crossing points containing a rising edge of a Host output.
24. This measurement refers to the total variation from the lowest crossing point to the highest, regardless of which edge is crossing.
25. Measurement taken from differential waveform, from  $-0.35V$  to  $+0.35V$ .
26. Measured in absolute voltage, i.e. single-ended measurement.

**Maximum Lumped Capacitive Output Loads**
**Table 5.**

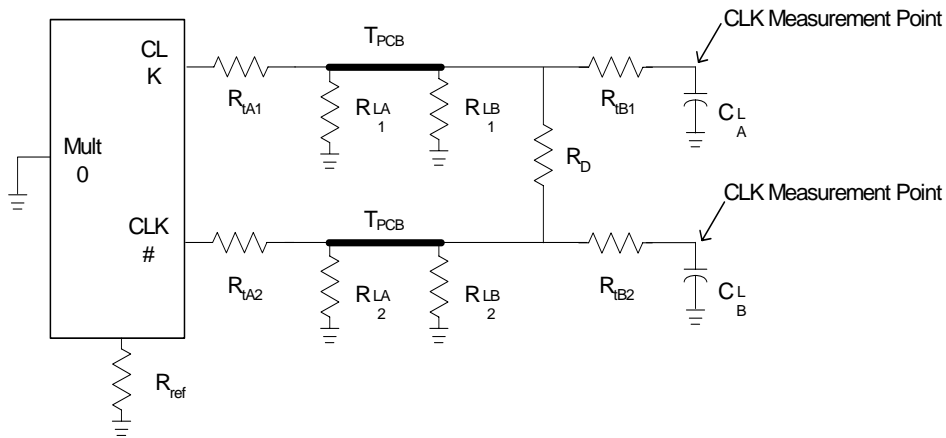
Clock	Max Load	Units
PCI Clocks	30	pF
3V66 (0,1)	30	pF
66B(0:2)	30	pF
48MUSB Clock	20	pF
48MDOT	10	pF
REF Clock	30	pF

**Maximum Ratings<sup>[27]</sup>**

Input Voltage Relative to VSS: ..... VSS-0.3V  
 Input Voltage Relative to VDDQ or AVDD: ..... VDD+0.3V  
 Storage Temperature: ..... -65°C to + 150°C  
 Operating Temperature: ..... 0°C to +85°C  
 Maximum Power Supply: ..... 3.5V

**Test and Measurement Setup**
**For Differential CPU Output Signals**

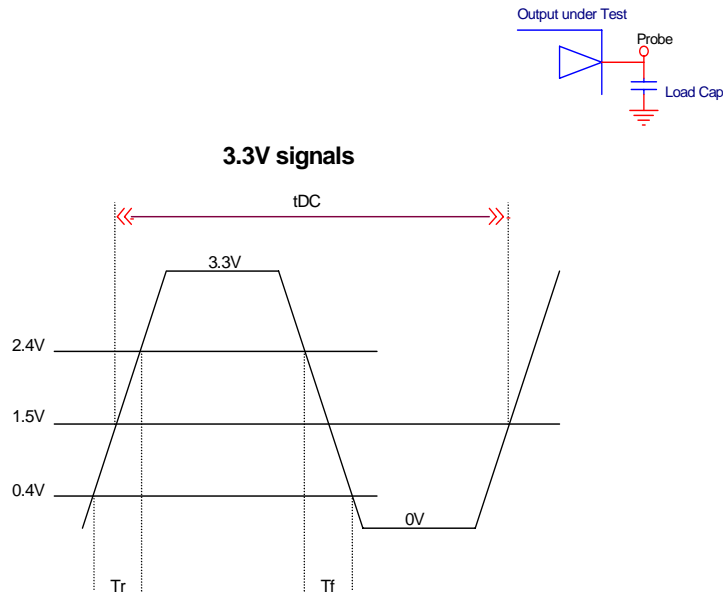
The following diagram shows lumped test load configurations for the differential Host Clock Outputs.


**Figure 1. Differential Host Clock Output**
**Table 6. Lumped Test Load Configuration**

Component	0.7 Volt Amplitude Value	1.0 Volt Amplitude Value
$R_{tA1}, R_{tA2}$	33 $\Omega$	0 $\Omega$
$R_{LA1}, R_{LA2}$	49.9 $\Omega$	•
$T_{PCB}$	3" 50 $\Omega Z$	3" 50 $\Omega Z$
$R_{LB1}, R_{LB2}$	•	63 $\Omega$
$R_D$	•	470 $\Omega$
$R_{tB1}, R_{tB2}$	0 $\Omega$	33 $\Omega$
$C_{LA}, C_{LB}$	2pF	2 pF
$R_{ref}$	475 $\Omega$ w/mult0=1	221 $\Omega$ w/mult0=0



**Note:**

27. The voltage on any input or I/O pin cannot exceed the power pin during the power-up. Power supply sequencing is NOT required.

**For single Ended Output Signals**

**Figure 2.**
**Buffer Characteristics**
**Current Mode CPU Clock Buffer Characteristics**

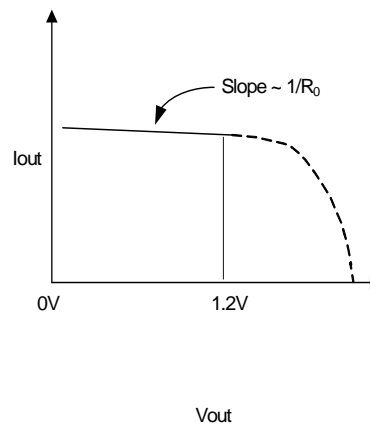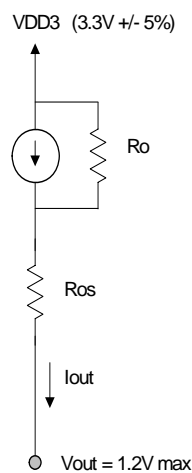The current mode output buffer detail and current reference circuit details are contained in the previous table of this data sheet. The following parameters are used to specify output buffer characteristics:

3. Output impedance of the current mode buffer circuit -  $R_o$  (see figure below).
4. Minimum and maximum required voltage operation range of the circuit -  $V_{op}$  (see figure below).
5. Series resistance in the buffer circuit -  $R_{os}$  (see figure below).
6. Current accuracy at given configuration into nominal test load for given configuration.



**Table 7. Host Clock (HCSL) Buffer Characteristic**

Characteristic	Minimum	Maximum
Ro	3000 Ohms (recommended)	N/A
Ros		
Vout	N/A	1.2V

Iout is selectable depending on implementation. The parameters above apply to all configurations. Vout is the voltage at the pin of the device.

deviation from the expected output current is +/- 7% as shown in the current accuracy table.

The various output current configurations are shown in the host swing select functions table. For all configurations, the

**Table 8. CPU Clock Current Select Function**

Mult0	Board Target Trace/Term Z	Reference R, Iref – Vdd (3*Rr)	Output Current	Voh @ Z	Mult0
0	50 Ohms	Rr = 221 1%, Iref = 5.00mA	Ioh = 4*Iref	1.0V @ 50	0
1	50 Ohms	Rr = 475 1%, Iref = 2.32mA	Ioh = 6*Iref	0.7V @ 50	1


**Table 9. Group Timing Relationship and Tolerances**

	Offset	Tolerance	Conditions
3V66 to PCI	2.5 nS	±1.0 nS	3V66 Leads PCI (un-buffered mode)
USB to DOT 48M Skew	0.0 nS	±1.0 nS	0 degrees phase shift
66B(0:2) to PCI offset	2.5 nS	±1.0 nS	66B leads PCI (buffered mode)

### USB and DOT 48M Phase Relationship


The 48MUSB and 48MDOT clocks are in phase. It is understood that the difference in edge rate will introduce some inherent offset. When 3V66\_1/VCH clock is configured for

VCH (48MHz) operation it is also in phase with the USB and DOT outputs.

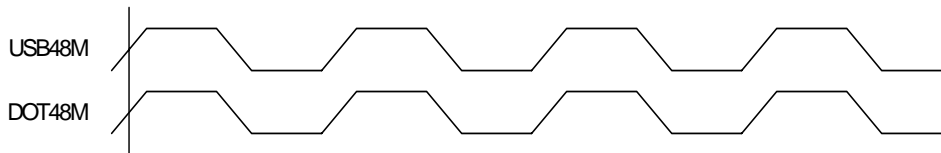
**Figure 3. 48MUSB and 48MDOT Phase Relationship**

### 66IN to 66B(0:2) Buffered Prop Delay

The 66IN to 66B(0:2) output delay is shown below.

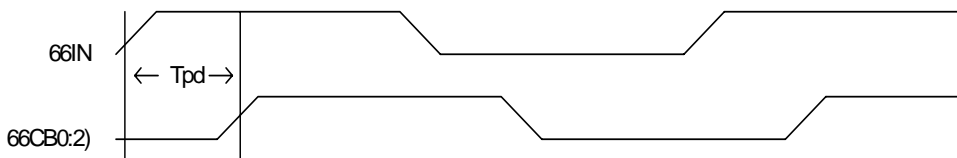
**Figure 4. 66IN to 66B(0:2) Output Delay**


The Tpd is the prop delay from the input pin (66IN) to the output pins (66B[0:2]). The outputs' variation of Tpd is

described in the AC parameters section of this data sheet. The measurement taken at 1.5 volts.

### 66BUF to PCI Buffered Clock Skew

The following figure shows the difference (skew) between the 3V33(0:5) outputs when the 66M clocks are connected to 66IN. This offset is described in the Group Timing Relationship


and Tolerances section of this data sheet. The measurements were taken at 1.5 volts.

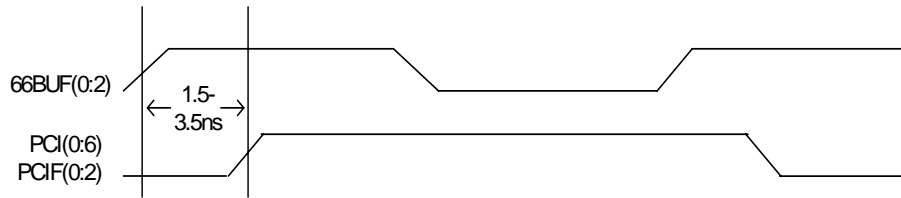

**Figure 5. Buffer Mode – 33V66(0:1); 66BUF(0:2) Phase Relationship**

### 3V66 to PCI Un-Buffered Clock Skew

The following figure show the timing relationship between 3V66\_(0:5) and PCI(0:6) and PCIF(0:2) when configured to run in the un-buffered mode.

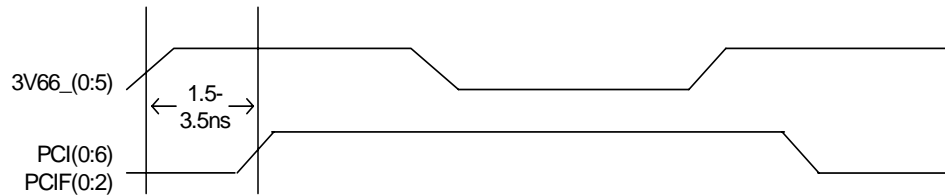

**Figure 6. Un-buffered Mode - 3V66\_(0:5) to PCI (0:6) and PCIF(0:2) Phase Relationship**

## Special Functions

### PCI\_F and IOAPIC Clock Outputs

The PCIF clock outputs are intended to be used, if required, for systems IOAPIC clock functionality. ANY 2 of the PCI\_F clock outputs can be used as IOAPIC 33Mhz clock outputs. They are 3.3V outputs will be divided down via a simple resistive voltage divider to meet specific system IOAPIC clock voltage requirements. In the event these clocks are not required, then these clocks can be used as general PCI clocks or disabled via the assertion of the PCI\_STP# pin.

### 3V66\_1/VCH Clock Output

The 3V66\_1/VCH pin has a dual functionality, which is selectable via SMBus.

#### Configured as DRCG (66M), SMBus Byte0, Bit 5 = '0'

The default condition for this pin is to power up in a 66M operation. In 66M operation this output is SSCG capable and when spreading is turned on, this clock will be modulated.

#### Configured as VCH (48M), SMBus Byte0, Bit 5 = '1'


In this mode, the output is configured as a 48Mhz non-spread spectrum output. This output is phase aligned with the other 48M outputs (USB and DOT), to within 1ns pin to pin skew. The switching of 3V66\_1/VCH into VCH mode occurs at system power on. When the SMBus Bit 5 of Byte 0 is programmed from a '0' to a '1', the 3V66\_1/VCH output may glitch while transitioning to 48M output mode.

### CPU\_STP# Clarification

The CPU\_STP# signal is an active low input used for synchronous stopping and starting the CPU output clocks while the rest of the clock generator continues to function.

#### CPU\_STP# - Assertion (transition from logic '1' to logic '0')

When CPU\_STP# pin is asserted, all CPU outputs that are set with the SMBus configuration to be stoppable via assertion of CPU\_STP# will be stopped after being sampled by 2 falling CPU clock edges. The final state of the stopped CPU signals is CPU = high and CPU0# = Low. There is no change to the output drive current values during the stopped state. The CPU is driven high with a current value equal to (Mult 0 'select') x (Iref), and the CPU# signal will not be driven. Due to external pulldown circuitry CPU# will be low during this stopped state.

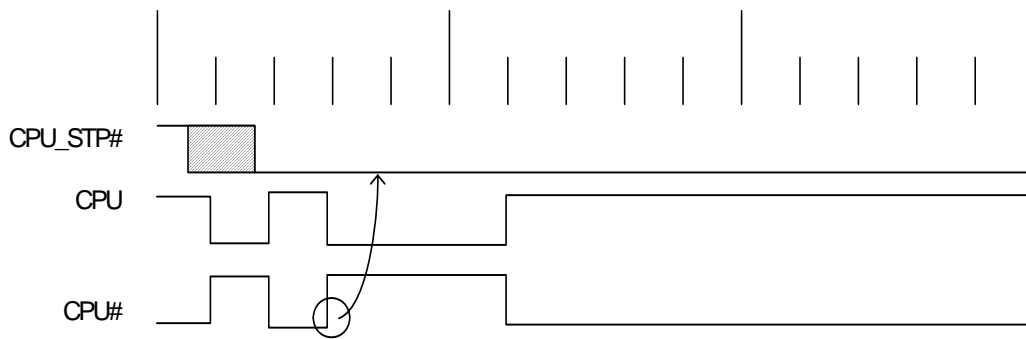

**Figure 7. Assertion CPU\_STP# Waveform Figure**

**Table 10. CPU\_STP# Functionality Table**


CPU_STP#	CPU#4	CPU	DRCG	66CLK(0:2)	PCI_F/PCI	PCI	USB/DOT
1	Normal	Normal	66M	66Input	66Input/2	66Input/2	48M
0	Iref*Mult	Float	66M	66Input	66Input/2	66Input/2	48M

**CPU\_STP# Deassertion (transition from logic '0' to logic '1')**

The de-assertion of the CPU\_STP# signal will cause all CPU outputs that were stopped to resume normal operation in a synchronous manner. Synchronous manner meaning that no short or stretched clock pulses will be produced when the clock resumes. The maximum latency from the de-assertion to active outputs is no more than 2 CPU clock cycles.

**PCI\_STP# Clarification**

The PCI\_STP# signal is an active low input used for synchronous stopping and starting the PCI outputs while the rest of the clock generator continues to function. The setup time for capturing PCI\_STP# going low is 10 nsec ( $t_{setup}$ ). The PCI\_F (0:2) clocks will not be affected by this pin if their control bits in the SMBus register are set to allow them to be free running.

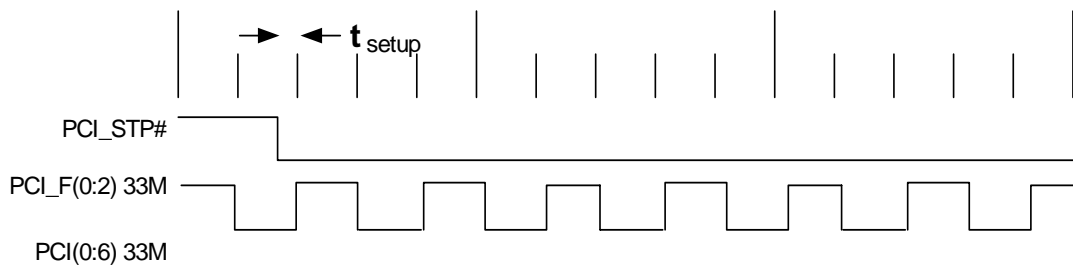

**Figure 8. PCI\_STP# Waveform**

**PCI\_STP# - Deassertion (transition from logic '0' to logic '1')**

The de-assertion of the PCI\_STP# signal will cause all PCI(0:6) and stoppable PCI\_F(0:2) clocks to resume running in a synchronous manner within 2 PCI clock periods after PCI\_STP# transitions to a high level.

Note that the PCI STOP function is controlled by 2 inputs. One is the device PCI\_STP# pin number 34 and the other is SMBus byte 0 bit 3. These 2 inputs to the function are logically AND'ed. If either the external pin or the internal SMBus register bit is set low then the stoppable PCI clocks will be stopped in a logic low state. Reading SMBus Byte 0 Bit 3 will return a 0 value if

either of these control bits are set low thereby indicating the devices stoppable PCI clocks are not running.

**PD# (Power Down) Clarification**

The PD# (Power Down) pin is used to shut off ALL clocks prior to shutting off power to the device. PD# is an asynchronous active low input. This signal is synchronized internally to the device powering down the clock synthesizer. PD# is an asynchronous function for powering up the system. When PD# is low, all clocks are driven to a low value and held there and the VCO and PLL's are also powered down. All clocks are shut down in a synchronous manner so as not to cause glitches while transitioning to the low 'stopped' state.



**Table 11. PD# Functionality Table**

PD#	CPU	CPU#	DRCG	66CLK (0:2)	PCI_F/PCI	PCI	USB/DOT
1	Normal	Normal	66M	66Input	66Input/2	66Input/2	48M
0	Iref*2	Float Low	Low	Low	Low	Low	Low

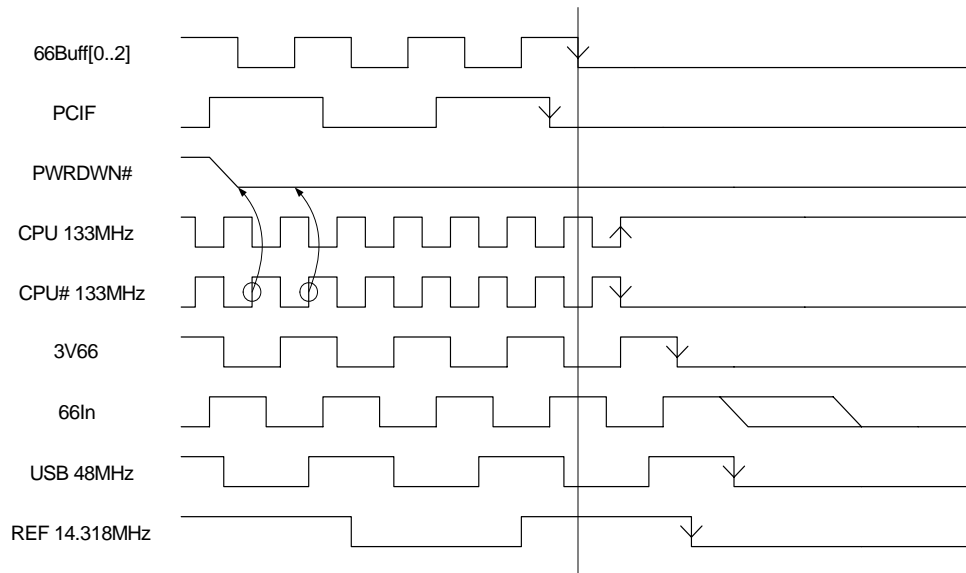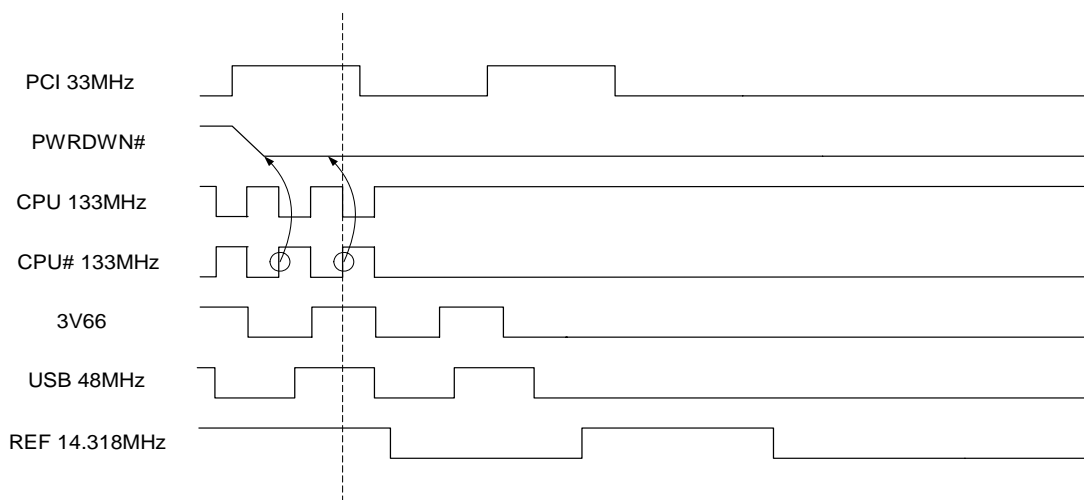**PD# - Assertion (transition from logic '1' to logic '0')- Buffered Mode**

When PD# is sampled low by two consecutive rising edges of the CPU# clock, then on the next high to low transition of PCIF, the PCIF clock is stopped low. On the next high to low transition of 66Buff, the 66Buff clock is stopped low. From this

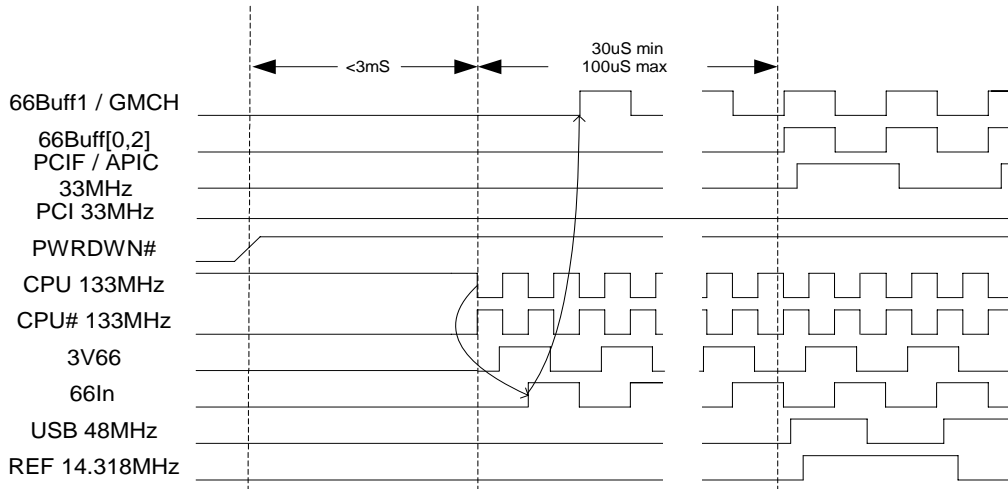
time, each clock will stop low on it's next high to low transition, except the CPU clock. The CPU clocks are held with the CPU clock pin driven high with a value of  $2 \times I_{ref}$ , and CPU# un-driven. After the last clock has stopped, the rest of the generator will be shut down.


**Figure 9. Power Down Assertion Timing Waveforms Figure – Buffered Mode**

**Figure 10. Power Down Assertion Timing Waveforms Figure – Non-Buffered Mode**

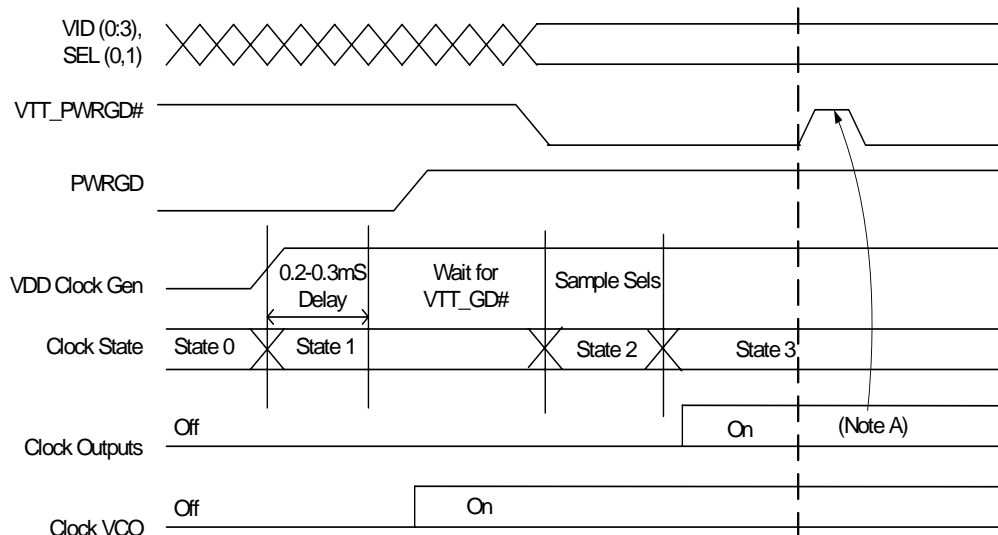


**PD# - Deassertion (transition from logic '0' to logic '1')**

The power-up latency between PD# rising to a valid logic '1' level and the starting of all clocks is less than 3.0 mS.

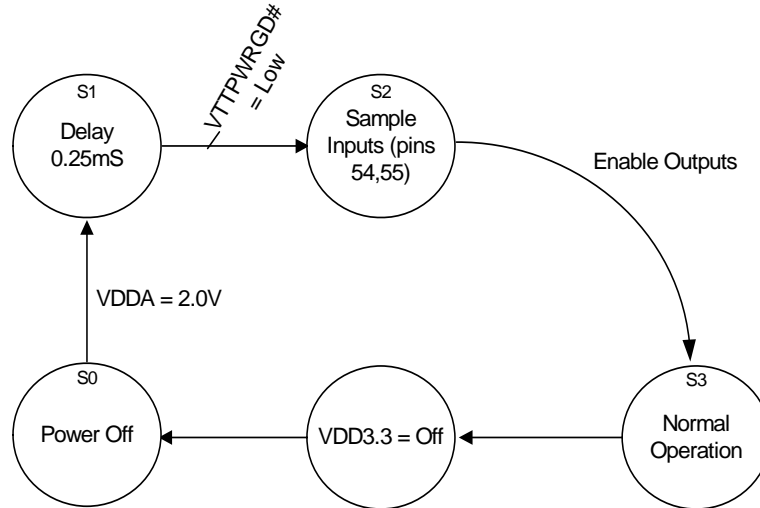


**Figure 11. Power Down De-Assertion Timing Waveforms**



Note A: Device is not effected, VTT\_PWRGD# is ignored.

**Figure 12. VTT\_PWRGD# Timing Diagram**


**Figure 13. Clock Generator Power Up/Run State Diagram**

## DC Characteristics

**Table 12. Current Accuracy Table**

	Conditions	Configuration	Load	Min	Max
I <sub>out</sub>	VDD = nominal (3.30V)	M0 = 0 or 1 and R <sub>r</sub> shown in Table	Nominal test load for given configuration	-7% I <sub>nom</sub>	+ 7% I <sub>nom</sub>
I <sub>out</sub>	VDD = 3.30±5%	All combinations of M0 or 1 and R <sub>r</sub> shown in Table	Nominal test load for given configuration	-12% I <sub>nom</sub>	+ 12% I <sub>nom</sub>

Note: I<sub>nom</sub> refers to the expected current based on the configuration of the device.

**Table 13. DC Component Parameters (VDD = 3.3V ±5%, TA = 0°C to +70°C)**

Parameter	Description	Conditions	Min.	Typ.	Max	Unit
I <sub>dd3.3V</sub>	Dynamic Supply Current	All frequencies at maximum values, Note 1	-	-	280	mA
I <sub>pd3.3V</sub>	Power Down Supply current	PD# Asserted	-	-	See Note 2	mA
C <sub>in</sub>	Input pin capacitance		-	-	5	pF
C <sub>out</sub>	Output pin capacitance		-	-	6	pF
L <sub>pin</sub>	Pin Inductance		-	-	7	nH
C <sub>x<sub>tal</sub></sub>	Crystal pin capacitance	Measured from the X <sub>in</sub> or X <sub>out</sub> Pin to Ground.	30	36	42	pF

**Notes:**

28. All outputs loaded as per maximum capacitive load table.

29. Absolute value = ((Programmed CPU I<sub>ref</sub>) (7)) + 10 ma

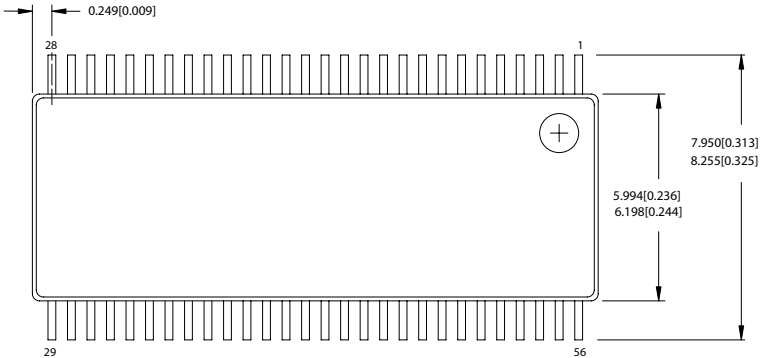
## Ordering Information

Part Number	Package Type	Product Flow
C9827HY	56-pin SSOP	Commercial, 0° to 70°C
C9827HT	56-pin TSSOP	Commercial, 0° to 70°C


### Package Diagrams

#### 56-Lead Thin Shrunk Small Outline Package, Type II (6 mm x 12 mm) Z5624


- NOTE:  
1. JEDEC STD REF MO-153  
2. BODY LENGTH DIMENSION DOES NOT INCLUDE MOLD PROTRUSION/END FLASH  
MOLD PROTRUSION/END FLASH SHALL NOT EXCEED 0.006 in (0.152 mm) PER SIDE  
3. DIMENSIONS IN MM. (INCHES) MIN. MAX.  
3. PACKAGE WEIGHT 0.42gms



PART #	
Z5624	STANDARD PKG.
ZZ5624	LEAD FREE PKG.

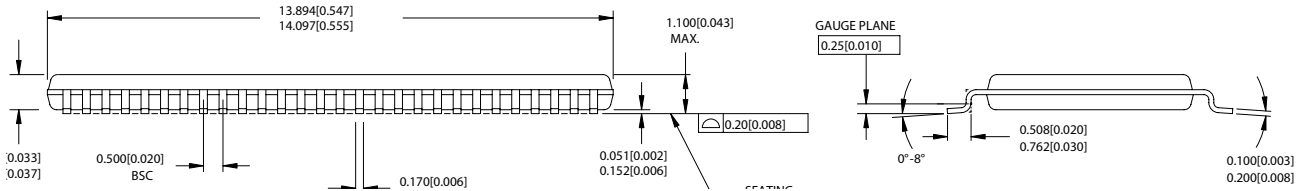

#### 56-Lead Shrunk Small Outline Package O56

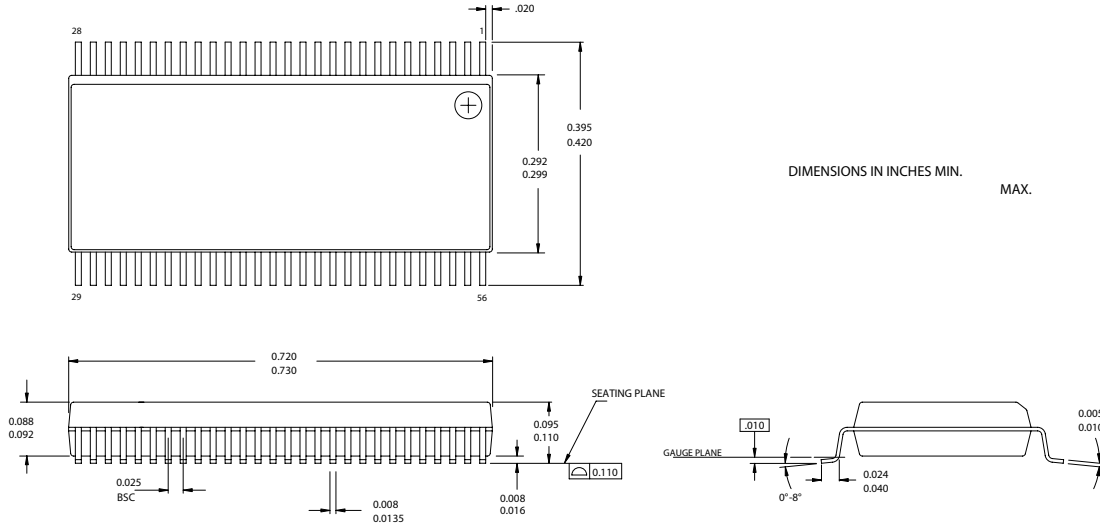

DIMENSIONS IN INCHES MIN. MAX.

While SLI has reviewed all information herein for accuracy and reliability, Spectra Linear Inc. assumes no responsibility for the use of any circuitry or for the infringement of any patents or other rights of third parties which would result from each use. This product is intended for use in normal commercial applications and is not warranted nor is it intended for use in life support, critical medical instruments, or any other application requiring extended temperature range, high reliability, or any other extraordinary environmental requirements unless pursuant to additional processing by Spectra Linear Inc., and expressed written agreement by Spectra Linear Inc. Spectra Linear Inc. reserves the right to change any circuitry or specification without notice.