




Automotive Transient Voltage Suppressors

High Temperature stability & High Reliability Conditions

Major Ratings and Characteristics

$V_{(BR)}$	6.8 V to 43 V
P_{PPM}	400 W
P_D	1.0 W
I_{FSM}	40 A
T_J max.	185 °C

Patented*

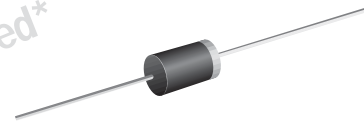

DO-204AL (DO-41)

* Patent#s
4,980,315
5,166,769
5,278,094

Features

- Patented PAR[®] construction
- Available in Unidirectional polarity only
- 400 W peak pulse power capability with a 10/1000 μ s waveform, repetitive rate (duty cycle): 0.01 %
- Excellent clamping capability
- Very fast response time
- Low incremental surge resistance
- Typical I_D less than 1.0 μ A above 10 V rating
- Solder Dip 260 °C, 40 seconds
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



Mechanical Data

Case: DO-204AL, molded epoxy over passivated junction

Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade, HE3 suffix for high reliability grade (AEC Q101 qualified)

Polarity: Color band denotes cathode end

Typical Applications

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive, and Telecommunication.

Maximum Ratings

($T_A = 25$ °C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak pulse power dissipation with a 10/1000 μ s waveform ⁽¹⁾ (Fig. 1)	P_{PPM}	Minimum 400	W
Peak pulse current with a 10/1000 μ s waveform ⁽¹⁾ (Fig. 3)	I_{PPM}	see next table	A
Power dissipation on infinite heatsink at $T_L = 75$ °C (Fig. 5)	P_D	1.0	W
Peak forward surge current 8.3 ms single half sine-wave ⁽²⁾	I_{FSM}	40	A
Maximum instantaneous forward voltage at 25 A	V_F	3.5	V
Operating junction and storage temperature range	T_J, T_{STG}	- 65 to + 185	°C

Notes:

(1) Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25$ °C per Fig. 2

(2) All terms and symbols are consistent with ANSI/IEEE C62.35

P4KA6.8 thru P4KA43A



Vishay General Semiconductor

Electrical Characteristics

(T_A = 25 °C unless otherwise noted)

Device Type	Breakdown Voltage V _(BR) ⁽¹⁾ at I _T (V)		Test Current I _T (mA)	Stand-off Voltage V _{WM} (V)	Maximum Reverse Leakage at V _{WM} I _D (μA)	T _J = 150 °C Maximum Reverse Leakage at V _{WM} I _D (μA)	Maximum Peak Pulse Surge Current I _{PPM} ⁽²⁾ (A)	Maximum Clamping Voltage at I _{PPM} V _C (V)	Maximum Temp. Coefficient of V _(BR) (%/°C)
	Min	Max							
P4KA6.8	6.12	7.48	10	5.50	300	1000	37.0	10.8	0.057
P4KA6.8A	6.45	7.14	10	5.80	300	1000	38.1	10.5	0.057
P4KA7.5	6.75	8.25	10	6.05	150	500	34.2	11.7	0.060
P4KA7.5A	7.13	7.88	10	6.40	150	500	35.4	11.3	0.061
P4KA8.2	7.38	9.02	10	6.63	50	200	32.0	12.5	0.065
P4KA8.2A	7.79	8.61	10	7.02	50	200	33.1	12.1	0.065
P4KA9.1	8.19	10.0	1.0	7.37	10	50	29.0	13.8	0.068
P4KA9.1A	8.65	9.55	1.0	7.78	10	50	29.9	13.4	0.068
P4KA10	9.00	11.0	1.0	8.10	5.0	20	26.7	15.0	0.073
P4KA10A	9.50	10.5	1.0	8.55	5.0	20	27.6	14.5	0.073
P4KA11	9.90	12.1	1.0	8.92	1.0	5.0	24.7	16.2	0.075
P4KA11A	10.5	11.6	1.0	9.40	1.0	5.0	25.6	15.6	0.075
P4KA12	10.8	13.2	1.0	9.72	1.0	5.0	23.1	17.3	0.076
P4KA12A	11.4	12.6	1.0	10.2	1.0	5.0	24.0	16.7	0.078
P4KA13	11.7	14.3	1.0	10.5	1.0	5.0	21.1	19.0	0.081
P4KA13A	12.4	13.7	1.0	11.1	1.0	5.0	22.0	18.2	0.081
P4KA15	13.5	16.3	1.0	12.1	1.0	5.0	18.2	22.0	0.084
P4KA15A	14.3	15.8	1.0	12.8	1.0	5.0	18.9	21.2	0.084
P4KA16	14.4	17.6	1.0	12.9	1.0	5.0	17.0	23.5	0.086
P4KA16A	15.2	16.8	1.0	13.6	1.0	5.0	17.8	22.5	0.086
P4KA18	16.2	19.8	1.0	14.5	1.0	5.0	15.1	26.5	0.088
P4KA18A	17.1	18.9	1.0	15.3	1.0	5.0	15.9	25.5	0.088
P4KA20	18.0	22.0	1.0	16.2	1.0	5.0	13.7	29.1	0.090
P4KA20A	19.0	21.0	1.0	17.0	1.0	5.0	14.4	27.7	0.090
P4KA22	19.8	24.2	1.0	17.8	1.0	5.0	12.5	31.9	0.092
P4KA22A	20.9	23.1	1.0	18.8	1.0	5.0	13.1	30.6	0.092
P4KA24	21.6	26.4	1.0	19.4	1.0	5.0	11.5	34.2	0.094
P4KA24A	22.8	25.2	1.0	20.5	1.0	5.0	12.0	33.2	0.094
P4KA27	24.3	29.7	1.0	21.8	1.0	5.0	10.2	39.1	0.096
P4KA27A	25.7	28.4	1.0	23.1	1.0	5.0	10.7	37.5	0.096
P4KA30	27.0	33.0	1.0	24.3	1.0	5.0	9.2	43.5	0.097
P4KA30A	28.5	31.5	1.0	25.6	1.0	5.0	9.7	41.4	0.097
P4KA33	29.7	36.3	1.0	26.8	1.0	5.0	8.4	47.7	0.098
P4KA33A	31.4	34.7	1.0	28.2	1.0	5.0	8.8	45.7	0.098
P4KA36	32.4	39.6	1.0	29.1	1.0	5.0	7.7	52.0	0.099
P4KA36A	34.2	37.8	1.0	30.8	1.0	5.0	8.0	49.9	0.099
P4KA39	35.1	42.9	1.0	31.6	1.0	5.0	7.1	56.4	0.100
P4KA39A	37.1	41.0	1.0	33.3	1.0	5.0	7.4	53.9	0.100
P4KA43	38.7	47.3	1.0	34.8	1.0	5.0	6.5	61.9	0.101
P4KA43A	40.9	45.2	1.0	36.8	1.0	5.0	6.7	59.3	0.101

Notes:

(1) Pulse test: t_p ≤ 50 ms

(2) Surge current waveform per Fig. 3 and derated per Fig. 2

(3) All terms and symbols are consistent with ANSI/IEEE C62.35



Ordering Information

Preferred P/N	Unit Weight (g)	Preferred Package Code	Base Quantity	Delivery Mode
P4KA6.8A-E3/54	0.336	54	4000	13" Diameter Paper Tape & Reel

Ratings and Characteristics Curves

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise specified)

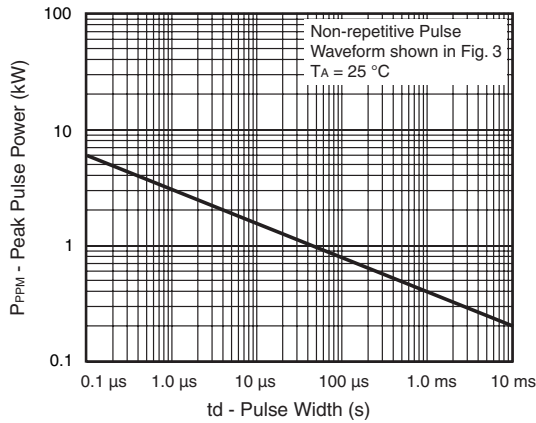


Figure 1. Peak Pulse Power Rating Curve

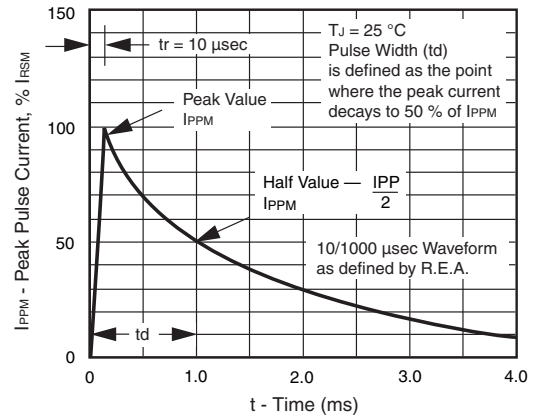


Figure 3. Pulse Waveform

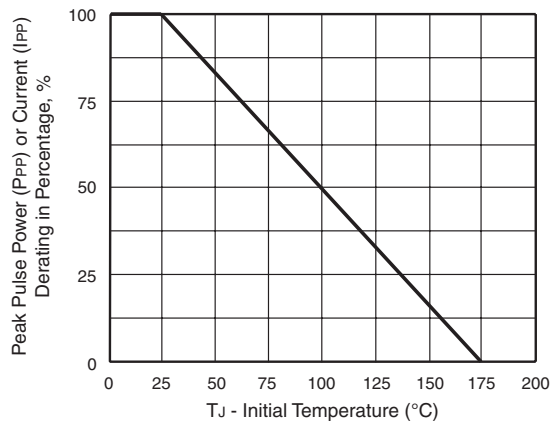


Figure 2. Pulse Power or Current versus Initial Junction Temperature

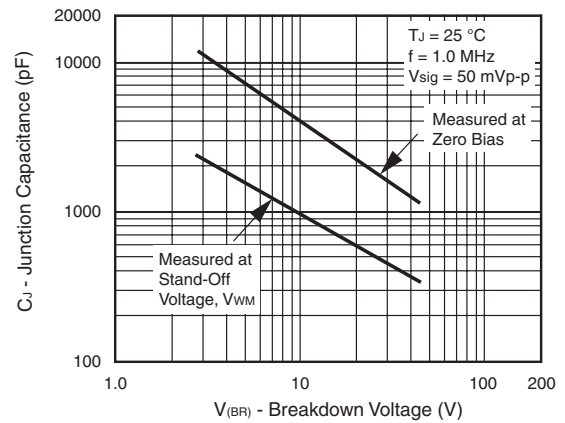


Figure 4. Typical Junction Capacitance

P4KA6.8 thru P4KA43A



Vishay General Semiconductor

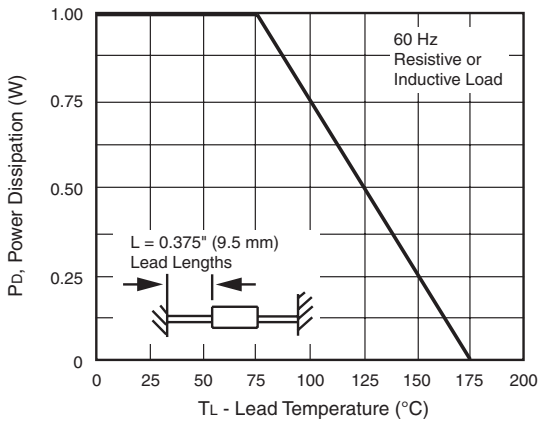


Figure 5. Power Derating Curve


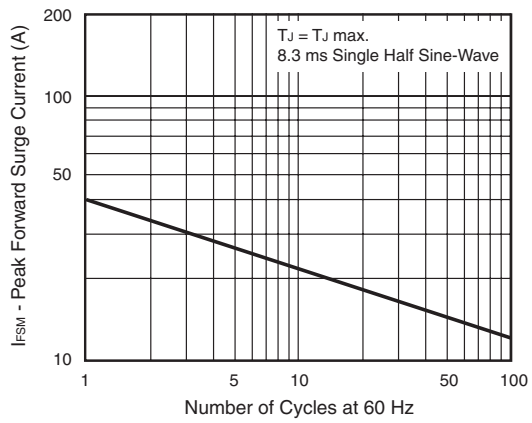


Figure 6. Maximum Non-Repetitive/Peak Forward Surge Current

Package outline dimensions in inches (millimeters)



Available in uni-directional only

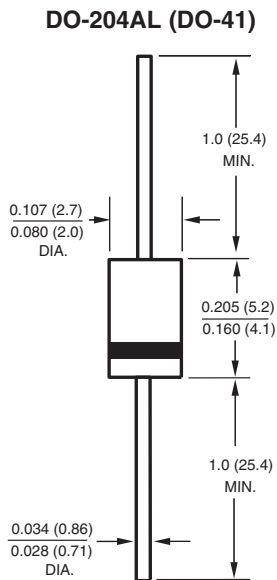

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.