


SPECIFICATIONS

Current Rating:	1 Amp
Contact Material:	Brass
Contact Resistance:	20mΩ Max.
Insulation Material:	Polyester UL94V-0
Insulation Resistance:	1000MΩ Max.
Withstanding:	300V AC
Operating Temp:	-40°C to +105°C

Recommended P.C. Board Hole Layout

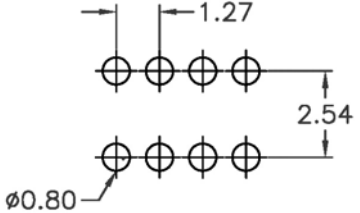

Series	Rows	Height (H)	Type	Positions	Pin Length	Plating
C3PH	X	X	XX	XX	XX	XX
Pin Header .05 x .100	2=Dual Row 1=Single Row	Blank=.100" (2.54mm) C=.067" (1.70mm) G=.055" (1.4mm)	ST=Straight RA=Right Angle SM=Surface Mount	01-40 Single Row 02-80 Double	SD=.236/.454 CS=Custom Specified Length (A/E)	TN=Tin SGXX=Selective Gold GDXX=Gold XX=Flash if blank, 3,5,10,15,30

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	7/12/06
				Checked	Lizzy	7/12/06
				Drawn	Tina	7/12/06
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **C3PH-2-ST-XX-SD-XX**

Description: 1.27 Pin Header Dual Rows DIP Type