




2211 Series

2.54mm Pin Header Single Row SMD Type

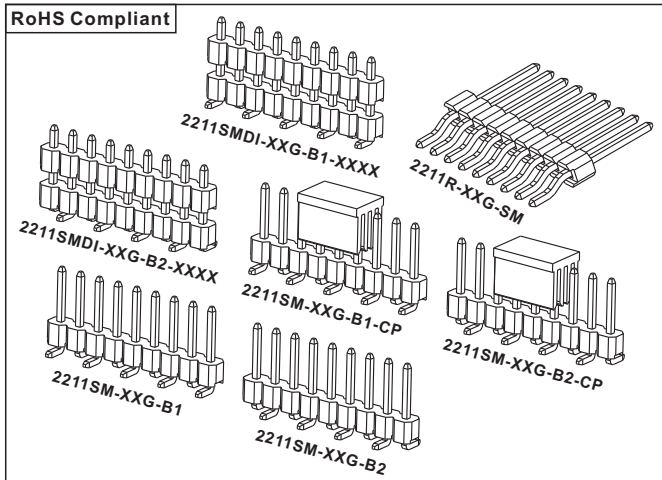

Specifications


1. Current Rating: 3.0A AC/DC.
2. Voltage Rating: 250V AC/DC.
3. Contact Resistance: 20m ohm. max.
4. Insulation Resistance: 1000M ohm. Min.
5. Withstanding Voltage: 600V AC for one minute.
6. Operating Temperature Range: -40°C to +105°C.

Material and Finish


1. Insulator: High Temperature Material (UL94V-0).
2. Insulator Height: 1.50/1.70/2.00/2.54/3.00mm, (Detail Spec, Consult to Sales dept).
3. Contact: Copper Alloy.
4. Plating: Gold Plated.

Feature

1. Design for Home Appliances, Aviation Electronics, Automobile Electronics and Computer(PC) Peripherals.

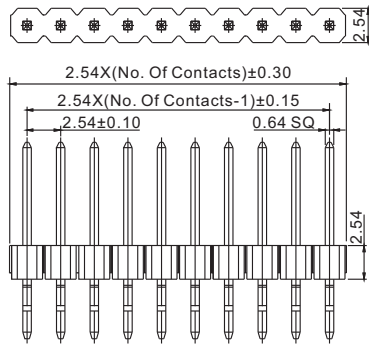


P/N:2211R-XXG-SM (A=6.0,B=4.5,C=1.27 Standard Type)

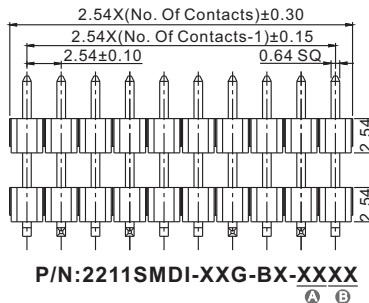


P/N:2211SMDI-XXG-BX-XXXX


A/B/C Dimension To Be Advised By Value Customers




B1 Type



B2 Type



CP Type

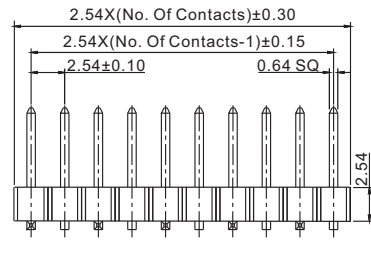

P/N:2211SM-XXG-BX (A=6.0,B=3.3 Standard Type)

Ordering Information

2211R-XXG-SM-XXXX

① ② ③ ④ ⑤

① R: Right Angle Single Row	③ G: Gold Plated T: Tin Plated	⑤ Blank: Standard Type XXXX: Special Length A/B Dimension
② No. Of Contacts (2 To 40 Ways)	④ SM: SMD Type	

2211SM-XXG-BX-CP

① ② ③ ④ ⑤

① SM: SMD Type	③ G: Gold Plated T: Tin Plated	⑤ Blank: Standard Type CP: With Cap
② No. Of Contacts (2 To 40 Ways)	④ BX: B1, B2 Type	

2211SMDI-XXG-BX-XXXX


① ② ③ ④ ⑤ ⑥

① SM: SMD Type	③ No. Of Contacts (2 To 40 Ways)	⑤ BX: B1, B2 Type
② DI: Double Insulator	④ G: Gold Plated T: Tin Plated	⑥ XXXX: Special Length A/B Dimension


Recommended PCB Layout



P/N:2211R-XXG-SM

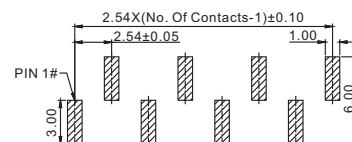

B1 Type

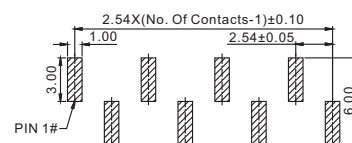

B2 Type

Unit:mm