

MJ CONNECTOR SYSTEM


MINI JUMPER type




CURRENT RATING : (01-1A)(OTHERS-3A)
 WITHSTANDING VOLTAGE : 500VAC(1 MIN)
 INSULATION RESISTANCE : 1000 MEGOHMS MIN.
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 OPERATION TEMPERATURE : -40°C TO+85°C
 RETENTION FORCE: (01-400G)(05-1000G)
 (OTHERS-540G)MIN

CONTACT: (01-PHOSPHOR BRONZE)
 (OTHERS-BRASS)
 INSULATOR. (06-NYLON 66)
 (OTHER-PBT & 30% G.F.)
 PLATING: GOLD OR TIN


MJ-01 (2.0mm open. H: 3.4mm)

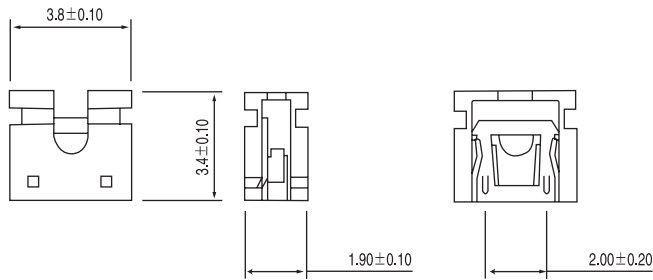


MJ-02 (2.54mm open. H: 4.5mm)

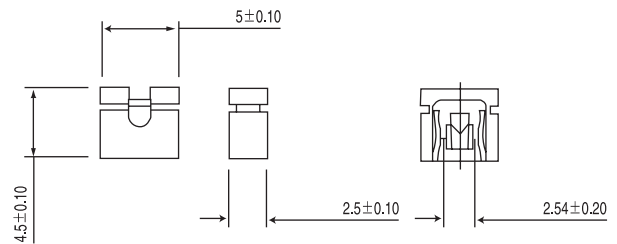


MJ-03 (2.54mm open. H: 6.0mm)

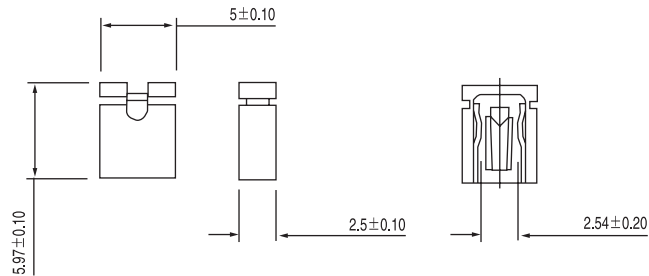


MJ-04 (2.54mm close. H: 6.5mm)

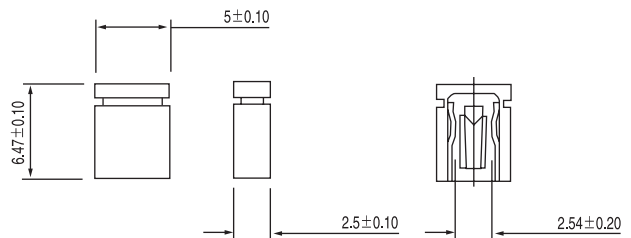

MJ-05 (2.54mm open. H: 8.0mm)

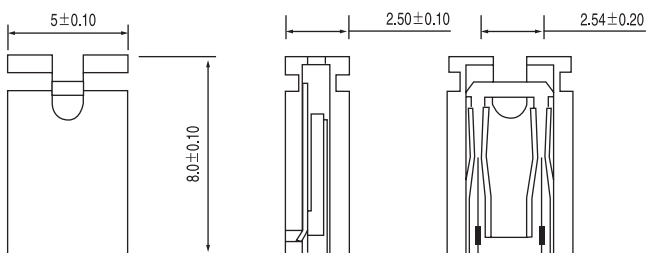

MJ-06 (2.54mm open)

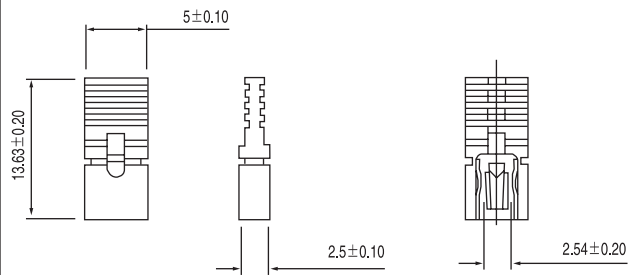

MJ - XX - XX - XX

Series

Plating

T1: Tin

A1: Gold Flash

A2: 3u" Gold

A3: 6u" Gold

A4: 15u" Gold

A5: 30" Gold

A6: 50u" Gold

Color

01: Black

02: Red

03: Blue