


# 45 Amp Ultrafast Rectifiers

## UES4505C — UES4515C

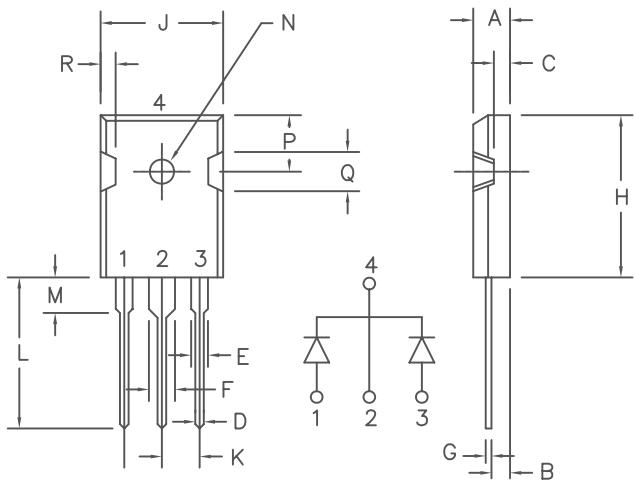

Dim.	Inches		Millimeter	
	Minimum	Maximum	Minimum	Maximum Notes
A	.185	.209	4.70	5.31
B	.087	.102	2.21	2.59
C	.059	.098	1.50	2.49
D	.040	.055	1.02	1.40
E	.079	.094	2.01	2.39
F	.118	.133	3.00	3.38
G	.016	.031	.410	0.78
H	.819	.883	20.80	22.4
J	.627	.650	15.93	16.5
K	.215	—	5.46	—
L	.790	.810	20.07	20.6
M	.157	.180	3.99	4.57
N	.139	.144	3.53	3.66
P	.255	.300	6.48	7.62
Q	.170	.210	4.32	5.33
R	.080	.110	2.03	2.79

Similar to TO-247AD

Microsemi Catalog Number

Industry Part Number

Repetitive Peak Reverse Voltage

Transient Peak Reverse Voltage

UES4505C

50V

50V

UES4510C

100V

100V

UES4515C

150V

150V

- Ultrafast Recovery Rectifiers
- $V_{RRM}$  50–150 Volts
- 150°C junction temperature
- $t_{rr}$  35nS maximum

### Electrical Characteristics

Average forward current per leg  
Average forward current per package  
Maximum surge current per leg  
Max. peak forward voltage per leg  
Typical peak forward voltage per leg  
Max. peak reverse current per leg  
Typical peak reverse current per leg  
Max. reverse recovery time  
Typical junction capacitance per leg

$I_{F(AV)}$  22.5 Amps  
 $I_{F(AV)}$  45 Amps  
 $I_{FSM}$  300 Amps  
 $V_{FM}$  .975 Volts  
 $V_{FM}$  .82 Volts  
 $I_{RM}$  15  $\mu$ A  
 $I_{RM}$  200  $\mu$ A  
 $t_{rr}$  40 nS  
 $C_J$  205 pF

$T_C = 116^\circ\text{C}$   
 $T_C = 116^\circ\text{C}$   
8.3ms, half sine,  $T_J = 150^\circ\text{C}$   
 $I_{FM} = 25\text{A}$ ,  $T_J = 25^\circ\text{C}^*$   
 $I_{FM} = 25\text{A}$ ,  $T_J = 150^\circ\text{C}^*$   
 $V_{RRM}$ ,  $T_J = 25^\circ\text{C}$   
 $V_{RRM}$ ,  $T_J = 150^\circ\text{C}$   
1/2A, 1A, 1/4A  
 $V_R = 10\text{V}$ ,  $T_J = 25^\circ\text{C}$

\*Pulse test: Pulse width 300 usec. Duty Cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range  
Operating junction temp range  
Max thermal resistance per pkg.  
Max thermal resistance per leg  
Mounting torque  
Weight

$T_{STG}$   
 $T_J$   
 $R_{\theta JC}$   
 $R_{\theta JC}$

−55°C to +175°C  
−55°C to +150°C  
1.5°C/W junction to case  
0.75°C/W junction to case  
8–10 inch pounds (#6 screw)  
.22 ounces (6.2 grams) typical

# UES4505C — UES4515C

Figure 1  
Typical Forward Characteristics – Per Leg

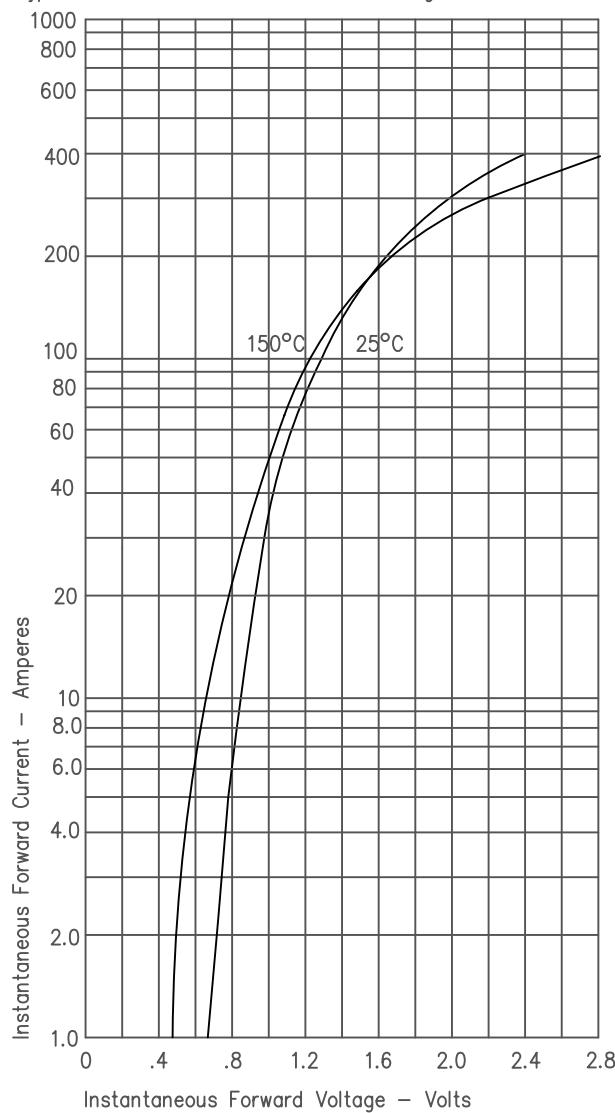


Figure 2  
Typical Reverse Characteristics – Per Leg

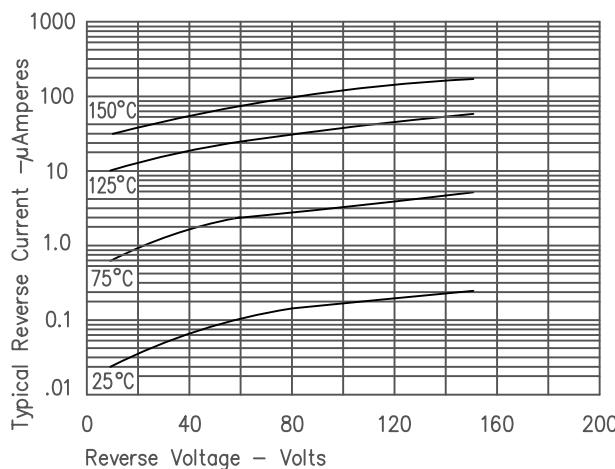


Figure 3  
Typical Junction Capacitance – Per Leg

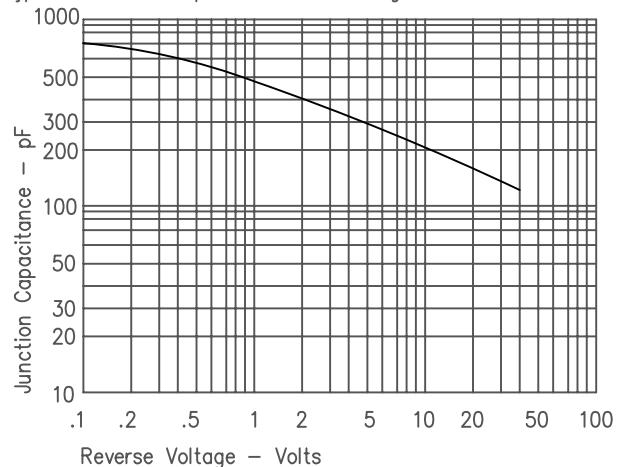


Figure 4  
Forward Current Derating – Per Leg

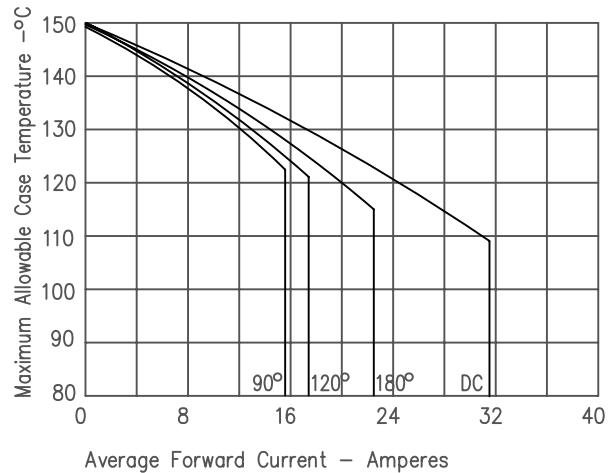


Figure 5  
Maximum Forward Power Dissipation – Per Leg

