MAJOR LEAGUE ELECTRONICS

2mm (.079") c.l. Zero Profile Header - Custom

FastBall Delivery 3/5 Days to You!

High Temp

☐ TSHCP - 2☐☐ - ☐ - ☐☐ - ☐☐☐ - ☐☐ - ☐☐☐

Mates with: SSHS, SSHR, SH, BSSH, BSSQ, BSSHC, SSHSM, SSHQ, SSHQR

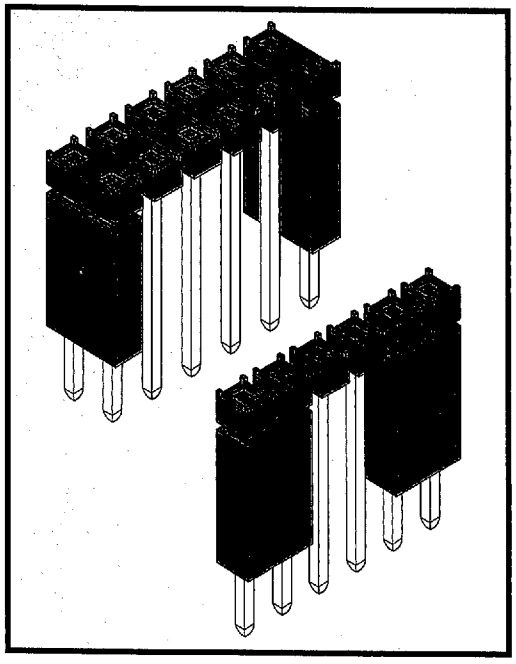

H High Temp.	
Pins per row	02-50
Singles	S
Doubles	D

Pin Options

Overall Length	Maximum Post Height	
(8,20) .323	(5,92) .233	02
(10,08) .397	(7,80) .307	04
(10,59) .417	(8,31) .327	06
(11,58) .456	(9,30) .366	07
(14,10) .555	(11,81) .465	08
(14,61) .575	(12,32) .485	10
(15,09) .594	(12,80) .504	12
(15,60) .614	(13,31) .524	14
(16,18) .637	(13,89) .547	16
(19,10) .752	(16,81) .662	18
(21,11) .831	(18,82) .741	20

(Metric Dimensions) Other pin lengths available upon request

Post Height For Lead Style Selection
See table above for maximum post height

Plating Options

G = 10μ in gold in contact area, gold flash on tail	G
GT = 10μ in gold in contact area, 200μ in tin/lead on tail	GT
H = 30μ gold on contact area, 200μ in tin/lead on tail	H
T = 200μ in tin/lead over entire pin	T

Other plating options available upon request

Position for Polarization Option 001-100

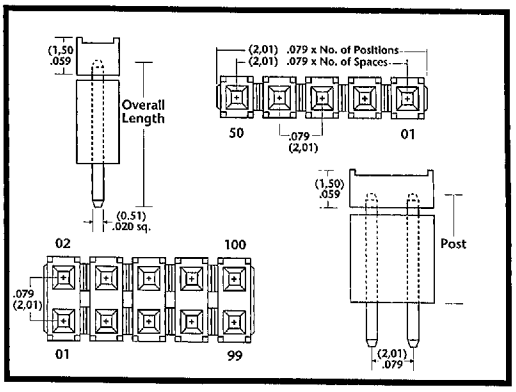

APPLICATION

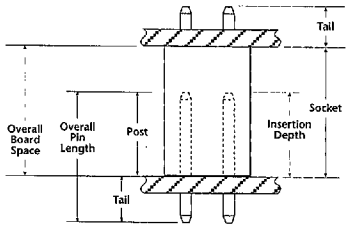

Socket to Zero Profile Header

Product cut to specific sizes is noncancellable/nonreturnable.
Parts are subject to change without notice.

Materials & Performance Specifications

	STANDARD	HIGH TEMPERATURE
Insulator	Black, glass filled, polyester	High temperature thermoplastic
Terminal	Phosphor Bronze	Phosphor Bronze
Insulation Resistance	5,000M Ω minimum	5,000M Ω minimum
Flammability	UL 94V-O	UL 94V-O
Temperature Range	-65°C to +125°C	-65°C to +250°C
Current Rating	2 ampere	2 ampere
Plating	All Plating Options over 50μ in Ni	All Plating Options over 50μ in Ni

2 mm

Delivery On Time, Every Time...Or The Order's Free!

D 24F 9019296 0000041 386

812-944-7244 • Facsimile: 812-944-7268 • Email: mle@iglou.com