
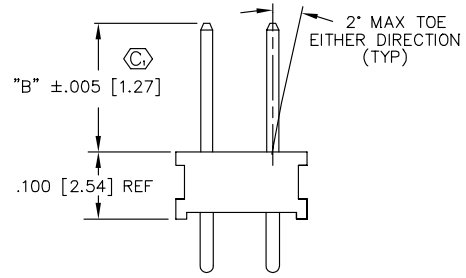
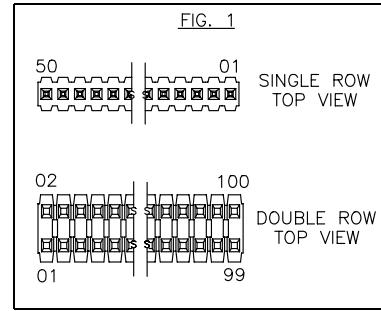
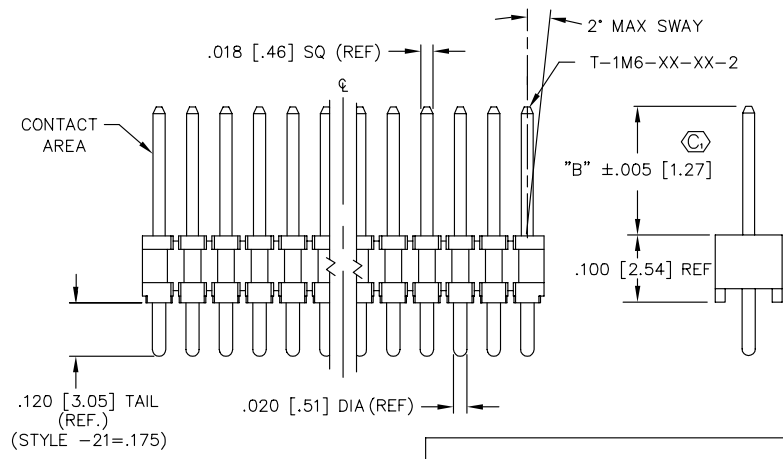
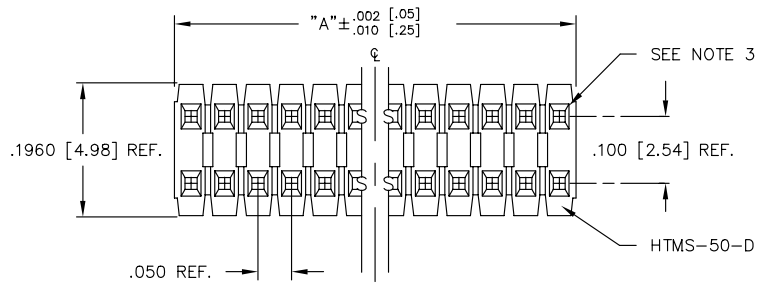


REVISION AF

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES TOLERANCES ARE:

ONE PLACE DECIMALS ± .1 [2.5]	THREE PLACE DECIMALS ± .005 [.13]	ANGLES ± 2°
TWO PLACE DECIMALS ± .01 [.25]	FOUR PLACE DECIMALS ± .0020 [.051]	

TITLE: HI-TEMP TERMINAL MICRO-STRIP
DWG NO: HTMS-1XX-XX-XX-X-XXX
SHEET 1 OF 1

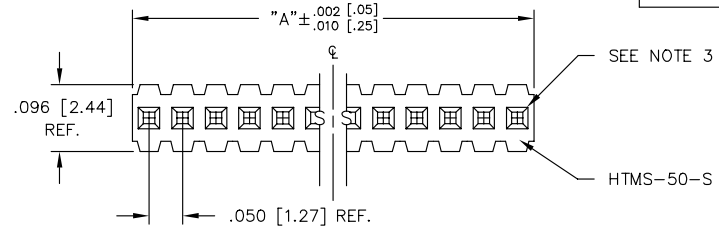

HTMS-1XX-XX-XX-X-XXX

BODY LENGTH SPEC
EXPRESSED IN # POS PER ROW
(-01 THRU -50)
"A" = 'XX' x .050 [1.27]

TERMINAL SPEC
SEE TABLE 1

OPTION
-POLARIZING SPECIFICATION
XXX INDICATES FOS. TO BE OMITTED
(SEE FIG. 1)

BODY SPECIFICATION
-S: SINGLE (USE HTMS-50-S)
-D: DOUBLE (USE HTMS-50-D)

PLATING SPECIFICATION
-G: GOLD, SPECIFY -G
-T: TIN, SPECIFY -T
ONLY AVAILABLE ON LEAD STYLES -01, -02, -51 AND -52.
-S: SELECTIVE, SPECIFY -S
-F: FLASH GOLD, SPECIFY -F
-H: HEAVY GOLD, SPECIFY -H
-TM: MATTE TIN, SPECIFY -T
-SM: SELECTIVE, MATTE TIN TAIL, SPECIFY -S
-FM: FLASH GOLD, MATTE TIN TAIL, SPECIFY -F

TABLE 2

LENGTH	"L"	LENGTH	"L"
-01	.440 [11.18]	-16	.825 [20.96]
-02	.410 [10.41]	-17	.320 [8.13]
-03	.610 [15.49]	-18	.450 [11.43]
-04	.505 [12.83]	-19	.650 [16.51]
-05	.705 [17.91]	-21	.505 [12.83]
-12	.425 [10.80]	-25	.330 [8.38]
-13	.625 [15.88]	-26	.373 [9.47]
-14	.555 [14.10]	-27	.398 [10.12]
-15	.755 [19.18]	-28	1.050 [26.67]

* REF FOR PIN LENGTH


TABLE 1
STRAIGHT

LEAD STYLE	TERMINAL SPEC.	"b"
-01	T-1M6-18-XX-2	.230 [5.84]
-02	T-1M6-17-XX-2	.100 [2.54]
-03	N/A	.125 [3.18]
-21	T-1M6-21-XX-2	.230 [5.84]
-51	T-1M6-02-XX-2	.190 [4.83]
-52	T-1M6-12-XX-2	.205 [5.21]
-53	T-1M6-04-XX-2	.285 [7.24]
-54	T-1M6-14-XX-2	.335 [8.51]
-55	T-1M6-03-XX-2	.390 [9.91]
-56	T-1M6-13-XX-2	.405 [10.29]
-57	T-1M6-19-XX-2	.430 [10.92]
-58	T-1M6-05-XX-2	.485 [12.32]
-59	T-1M6-15-XX-2	.535 [13.59]
-60	T-1M6-16-XX-2	.605 [15.37]

PACKAGING TUBE TABLE

BODY STYLE	LEAD STYLE	TUBE	PLUG
HTMS-DOUBLE STRAIGHT STYLES	-01,-21, -51,-52	PT-HTMS001-D	TP-24
	-02	PT-HTMS001-D	TP-24
	-53	PT-HTMS001-D	TP-24
	-55,-56	PT-HTMS001-D	TP-24
	-54	PT-HTMS001-D	TP-24
	-57,-58	PT-HTMS001-D	TP-24
	-59	PT-HTMS001-D	TP-24
HTMS-SINGLE STRAIGHT STYLES	-01,-21,-53	PT-1-24-01-24	TP-24
	-54,-58 -59,-60	PT-1-24-10-03	TP-33
	-02	PT-1-24-01-12	TP-12
	-51,-52	PT-1-24-01-66	TP-24
	-55,-56	PT-1-24-02-03	TP-24
	-57	PT-1-24-01-46	TP-24

- NOTES:
- MAX ALLOWABLE BOW: .005 INCH/INCH.
 - TERMINAL PUSHOUT FORCE: 2 lbs. MIN.
 - MAX PIN ROTATION IN BODY: 2°.
 - ⊙ REPRESENTS A CRITICAL DIMENSION.
 - POSITIONS -08 THROUGH -50 ARE TO BE PACKAGED IN TUBES; POSITIONS -01 THROUGH -07 ARE TO BE LAYER PACKAGED.
 - CUT FLASH .010 [.25] MAX

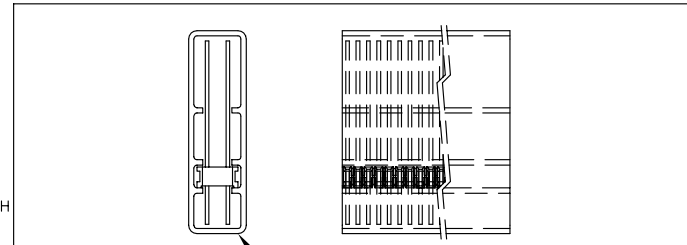

PT-HTMS001-D
PACKAGING VIEW FOR HTMS-1XX-60-X-D-XXX

PLOT SCALE 1=1333

MATERIAL:
INSULATOR:
BLACK LIQUID
CRYSTAL POLYMER OR
NYLON 4/6
TERMINAL:
PHOSPHOR BRONZE

EXISPROD/ASSEMBLY/050
HTMS-ASM

samtec

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY: GREG REDINGER 2-24-92	ENG APPROVAL	HTMS-1XX-XX-XX-X-XXX
CHECKED BY: ECKERT	PAE	SHEET 1 OF 1

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.