

DM54176/DM74176, DM54177/DM74177 Presettable Decade and Binary Counters

General Description

These high-speed counters consist of four d-c coupled, master-slave flip-flops which are internally interconnected to provide either a divide-by-two and a divide-by-five counter (176) or a divide-by-two and a divide-by-eight counter (177). These counters are fully programmable; that is, the outputs may be preset to any state by placing a low on the count/load input and entering the desired data at the data inputs. The outputs will change independent of the state of the clocks.

During the count operation, transfer of information to the outputs occurs on the negative-going edge of the clock pulse. These counters feature a direct clear which, when taken low, sets all outputs low regardless of the state of the clocks.

These counters may also be used as 4-bit latches by using the count/load input as the strobe and entering data at the data inputs. The outputs will directly follow the data inputs when the count/load is low, but will remain unchanged when the count/load is high and the clock inputs are inactive.

(Continued)

Features


- Performs BCD, bi-quinary, or binary counting
- Fully programmable
- Fully independent clear input
- Output Q_A maintains full fan-out capability in addition to driving clock-2 input
- Typical count frequency
 - Clock 1 50 MHz
 - Clock 2 25 MHz
- Typical power dissipation 150 mW

Absolute Maximum Ratings (Note 1)

Supply Voltage	7V
Input Voltage	5.5V
Storage Temperature Range	- 65°C to 150°C

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device can not be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Connection Diagram

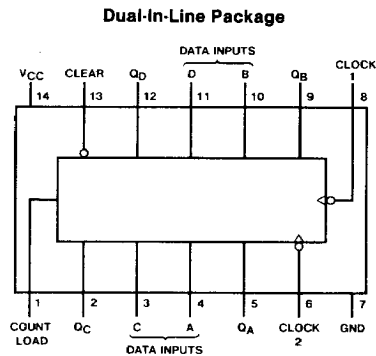

Note: Low input to clear sets Q_A , Q_B , Q_C and Q_D low.

54176 (J)
54177 (J)

74176 (N)
74177 (N)

General Description (Continued)

TYPICAL COUNT CONFIGURATIONS 176

The output of flip-flop A is not internally connected to the succeeding flip-flops; therefore, the count may be operated in three independent modes:

1. When used as a BCD decade counter, the clock-2 input must be externally connected to the Q_A output. The clock-1 input receives the incoming count, and a count sequence is obtained in accordance with the BCD count sequence function table.
2. If a symmetrical divide-by-ten count is desired for frequency synthesizers (or other applications requiring division of a binary count by a power of ten), the Q_D output must be externally connected to the clock-1 input. The input count is then applied at the clock-2 input and a divide-by-ten square wave is obtained at output Q_A in accordance with the bi-quinary function table.
3. For operation as a divide-by-two counter and a divide-by-five counter, no external interconnections are required. Flip-flop A is used as a binary element for the divide-by-two function. The clock-2 input is used to obtain binary divide-by-five operation at the Q_B , Q_C ,

and Q_D outputs. In this mode, the two counters operate independently; however, all four flip-flops are loaded and cleared simultaneously.

177

The output of flip-flop A is not internally connected to the succeeding flip-flops; therefore the counter may be operated in two independent modes:

1. When used as a high-speed 4-bit ripple-through counter, output Q_A must be externally connected to the clock-2 input. The input count pulses are applied to the clock-1 input. Simultaneous divisions by 2, 4, 8, and 16 are performed at the Q_A , Q_B , Q_C and Q_D outputs as shown in the function table.
2. When used as a 3-bit ripple-through counter, the input count pulses are applied to the clock-2 input. Simultaneous frequency divisions by 2, 4, and 8 are available at the Q_B , Q_C , and Q_D outputs. Independent use of flip-flop A is available if the load and clear functions coincide with those of the 3-bit ripple-through counter.

Function Tables

176
Decade (BCD)
(See Note A)

Count	Output			
	Q_D	Q_C	Q_B	Q_A
0	L	L	L	L
1	L	L	L	H
2	L	L	H	L
3	L	L	H	H
4	L	H	L	L
5	L	H	L	H
6	L	H	H	L
7	L	H	H	H
8	H	L	L	L
9	H	L	L	H

176
(See Note B)

Count	Output			
	Q_A	Q_D	Q_C	Q_B
0	L	L	L	L
1	L	L	L	H
2	L	L	H	L
3	L	L	H	H
4	L	H	L	L
5	H	L	L	L
6	H	L	L	H
7	H	L	H	L
8	H	L	H	H
9	H	H	L	L

177
(See Note A)

Count	Output			
	Q_D	Q_C	Q_B	Q_A
0	L	L	L	L
1	L	L	L	H
2	L	L	H	L
3	L	L	H	H
4	L	H	L	L
5	L	H	L	H
6	L	H	H	L
7	L	H	H	H
8	H	L	L	L
9	H	L	L	H
10	H	L	H	L
11	H	L	H	H
12	H	H	L	L
13	H	H	L	H
14	H	H	H	L
15	H	H	H	H

H = High Level, L = Low Level

Note A: Output Q_A connected to clock-2 input.

Note B: Output Q_D connected to clock-1 input.

Recommended Operating Conditions

Sym	Parameter		DM54176			DM74176			Units
			Min	Nom	Max	Min	Nom	Max	
V _{CC}	Supply Voltage		4.5	5	5.5	4.75	5	5.25	V
V _{IH}	High Level Input Voltage		2			2			V
V _{IL}	Low Level Input Voltage				0.8			0.8	V
I _{OH}	High Level Output Current				-0.8			-0.8	mA
I _{OL}	Low Level Output Current				16			16	mA
f _{CLK}	Clock Frequency (Clock 1)		0		35	0		35	MHz
t _W	Pulse Width	Clock 1	14			14			ns
		Clock 2	28			28			
		Clear	25			25			
		Load	20			20			
t _{SU}	Setup Time	Data High	15			15			ns
		Data Low	20			20			
t _H	Data Hold Time		20			20			ns
t _{EN}	Count Enable Time (Note 1)		25			25			ns
T _A	Free Air Operating Temperature		-55		125	0		70	°C

Note 1: Count enable time is the interval immediately preceding the negative-going edge of the clock pulse during which the count/load and clear inputs must both be high to ensure counting.

'176 Electrical Characteristics

over recommended operating free air temperature (unless otherwise noted)

Sym	Parameter	Conditions	Min	Typ (Note 1)	Max	Units
V_I	Input Clamp Voltage	$V_{CC} = \text{Min}, I_I = -12 \text{ mA}$			-1.5	V
V_{OH}	High Level Output Voltage	$V_{CC} = \text{Min}, I_{OH} = \text{Max}$ $V_{IL} = \text{Max}, V_{IH} = \text{Min}$	2.4	3.4		V
V_{OL}	Low Level Output Voltage	$V_{CC} = \text{Min}, I_{OL} = \text{Max}$ $V_{IH} = \text{Min}, V_{IL} = \text{Max}$ (Note 4)		0.2	0.4	V
I_I	Input Current @ Max Input Voltage	$V_{CC} = \text{Max}, V_I = 5.5V$			1	mA
I_{IH}	High Level Input Current	$V_{CC} = \text{Max}$ $V_I = 2.4V$	Count/Load		40	μA
			Data		40	
			Clear		80	
			Clock 1		80	
			Clock 2		120	
I_{IL}	Low Level Input Current	$V_{CC} = \text{Max}$ $V_I = 0.4V$	Count/Load		-1.6	mA
			Data		-1.6	
			Clear		-3.2	
			Clock 1		-4.8	
			Clock 2		-4.8	
I_{OS}	Short Circuit Output Current	$V_{CC} = \text{Max}$ (Note 2)	DM54	-20	-57	mA
			DM74	-18	-57	
I_{CC}	Supply Current	$V_{CC} = \text{Max}$ (Note 3)		30	48	mA

Note 1: All typicals are at $V_{CC} = 5V, T_A = 25^\circ\text{C}$.**Note 2:** Not more than one output should be shorted at a time.**Note 3:** I_{CC} is measured with all inputs grounded and all outputs open.**Note 4:** I_{OL} outputs are tested at $I_{OL} = \text{Max}$ plus the limit value of I_{IL} for the Clock 2 input. This permits driving the Clock 2 input while maintaining full fan-out capability.

'176 Switching Characteristics at $V_{CC} = 5V$ and $T_A = 25^\circ C$
 (See Section 1 for Test Waveforms and Output Load)

Parameter	From (Input) To (Output)	$R_L = 400\Omega$ $C_L = 15\text{ pF}$			Units
		Min	Typ	Max	
f_{MAX} Maximum Clock Frequency	Clock 1 to Q_A	35	50		MHz
t_{PLH} Propagation Delay Time Low to High Level Output	Clock 1 to Q_A		9	13	ns
t_{PHL} Propagation Delay Time High to Low Level Output	Clock 1 to Q_A		11	17	ns
t_{PLH} Propagation Delay Time Low to High Level Output	Clock 2 to Q_B		12	18	ns
t_{PHL} Propagation Delay Time High to Low Level Output	Clock 2 to Q_B		14	21	ns
t_{PLH} Propagation Delay Time Low to High Level Output	Clock 2 to Q_C		27	41	ns
t_{PHL} Propagation Delay Time High to Low Level Output	Clock 2 to Q_C		34	51	ns
t_{PLH} Propagation Delay Time Low to High Level Output	Clock 2 to Q_D		13	20	ns
t_{PHL} Propagation Delay Time High to Low Level Output	Clock 2 to Q_D		17	26	ns
t_{PLH} Propagation Delay Time Low to High Level Output	Data to Output		19	29	ns
t_{PHL} Propagation Delay Time High to Low Level Output	Data to Output		31	46	ns
t_{PLH} Propagation Delay Time Low to High Level Output	Load to Any Q		29	43	ns
t_{PHL} Propagation Delay Time High to Low Level Output	Load to Any Q		32	48	ns
t_{PHL} Propagation Delay Time High to Low Level Output	Clear to Any Q		32	48	ns

Recommended Operating Conditions

Sym	Parameter		DM54177			DM74177			Units
			Min	Nom	Max	Min	Nom	Max	
V _{CC}	Supply Voltage		4.5	5	5.5	4.75	5	5.25	V
V _{IH}	High Level Input Voltage		2			2			V
V _{IL}	Low Level Input Voltage				0.8			0.8	V
I _{OH}	High Level Output Current				-0.8			-0.8	mA
I _{OL}	Low Level Output Current				16			16	mA
f _{CLK}	Clock Frequency (Clock 1)		0		35	0		35	MHz
t _w	Pulse Width	Clock 1	14			14			ns
		Clock 2	28			28			
		Clear	25			25			
		Load	20			20			
t _{SU}	Setup Time	Data High	15			15			ns
		Data Low	20			20			
t _H	Hold Time		20			20			ns
t _{EN}	Count Enable Time (Note 1)		25			25			ns
T _A	Free Air Operating Temperature		-55		125	0		70	°C

Note 1: Count enable time is the interval immediately preceding the negative-going edge of the clock pulse during which the count/load and clear inputs must both be high to ensure counting.

'177 Electrical Characteristics

over recommended operating free air temperature (unless otherwise noted)

Sym	Parameter	Conditions	Min	Typ (Note 1)	Max	Units	
V_I	Input Clamp Voltage	$V_{CC} = \text{Min}, I_I = -12 \text{ mA}$			-1.5	V	
V_{OH}	High Level Output Voltage	$V_{CC} = \text{Min}, I_{OH} = \text{Max}$ $V_{IL} = \text{Max}, V_{IH} = \text{Min}$	2.4	3.4		V	
V_{OL}	Low Level Output Voltage	$V_{CC} = \text{Min}, I_{OL} = \text{Max}$ $V_{IH} = \text{Min}, V_{IL} = \text{Max}$ (Note 4)		0.2	0.4	V	
I_I	Input Current @ Max Input Voltage	$V_{CC} = \text{Max}, V_I = 5.5\text{V}$			1	mA	
I_{IH}	High Level Input Current	$V_{CC} = \text{Max}$ $V_I = 2.4\text{V}$	Count/Load			40	μA
			Data			40	
			Clear			80	
			Clock 1			80	
			Clock 2			80	
I_{IL}	Low Level Input Current	$V_{CC} = \text{Max}$ $V_I = 0.4\text{V}$	Count/Load			-1.6	mA
			Data			-1.6	
			Clear			-3.2	
			Clock 1			-4.8	
			Clock 2			-3.2	
I_{OS}	Short Circuit Output Current	$V_{CC} = \text{Max}$ (Note 2)	DM54	-20		-57	mA
			DM74	-18		-57	
I_{CC}	Supply Current	$V_{CC} = \text{Max}$ (Note 3)		30	48	mA	

Note 1: All typicals are at $V_{CC} = 5\text{V}, T_A = 25^\circ\text{C}$.

Note 2: Not more than one output should be shorted at a time.

Note 3: I_{CC} is measured with all inputs grounded and all outputs open.

Note 4: Q_A outputs are tested at $I_{OL} = \text{Max}$ plus the limit value of I_{IL} for the Clock 2 input. This permits driving the Clock 2 input while maintaining full fan-out capability.

'177 Switching Characteristics at $V_{CC} = 5V$ and $T_A = 25^\circ C$


(See Section 1 for Test Waveforms and Output Load)

Parameter	From (Input) To (Output)	$R_L = 400\Omega$ $C_L = 15\text{ pF}$			Units
		Min	Typ	Max	
f_{MAX} Maximum Clock Frequency	Clock 1 to Q_A	35	50		MHz
t_{PLH} Propagation Delay Time Low to High Level Output	Clock 1 to Q_A		9	13	ns
t_{PHL} Propagation Delay Time High to Low Level Output	Clock 1 to Q_A		11	17	ns
t_{PLH} Propagation Delay Time Low to High Level Output	Clock 2 to Q_B		12	18	ns
t_{PHL} Propagation Delay Time High to Low Level Output	Clock 2 to Q_B		14	21	ns
t_{PLH} Propagation Delay Time Low to High Level Output	Clock 2 to Q_C		27	41	ns
t_{PHL} Propagation Delay Time High to Low Level Output	Clock 2 to Q_C		34	51	ns
t_{PLH} Propagation Delay Time Low to High Level Output	Clock 2 to Q_D		44	66	ns
t_{PHL} Propagation Delay Time High to Low Level Output	Clock 2 to Q_D		50	75	ns
t_{PLH} Propagation Delay Time Low to High Level Output	Data to Output		19	29	ns
t_{PHL} Propagation Delay Time High to Low Level Output	Data to Output		31	46	ns
t_{PLH} Propagation Delay Time Low to High Level Output	Load to Any Q		29	43	ns
t_{PHL} Propagation Delay Time High to Low Level Output	Load to Any Q		32	48	ns
t_{PHL} Propagation Delay Time High to Low Level Output	Clear to Any Q		32	48	ns

Logic Diagrams


DM54176/DM74176, DM54177/DM74177

'176

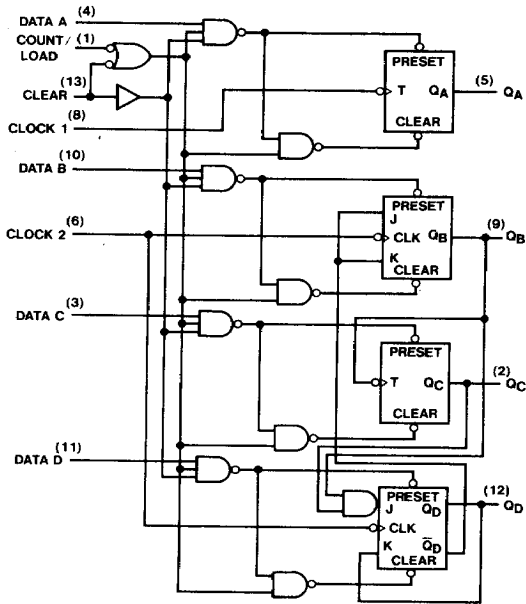

TL/F/6558-2

'177

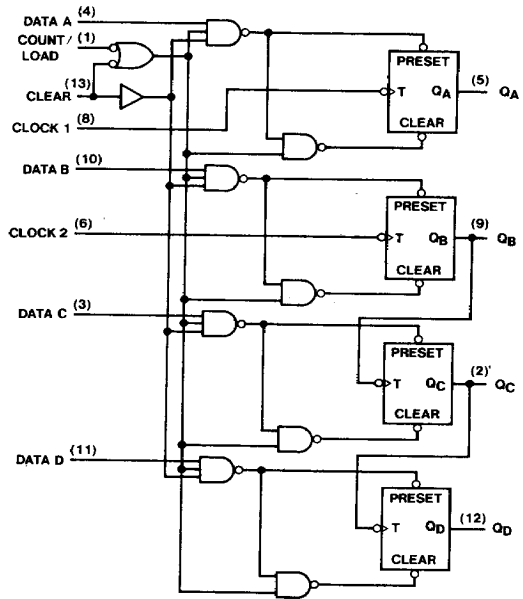

TL/F/6558-3