
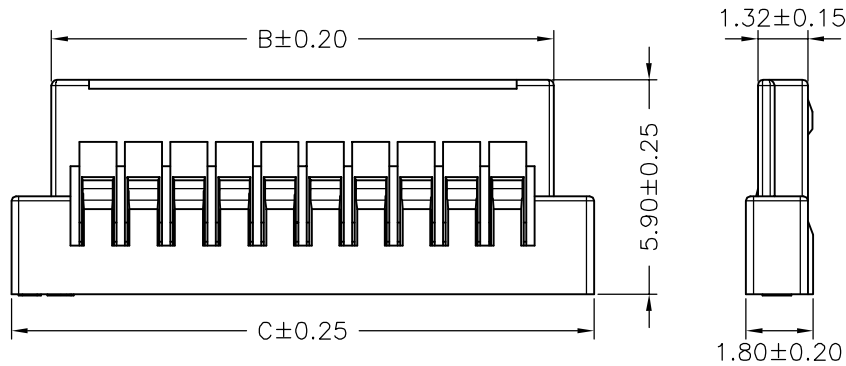


SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 200V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 40mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Black

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
A125H-02P	1.25	3.80	6.00
A125H-03P	2.50	5.05	7.25
A125H-04P	3.75	6.30	8.50
A125H-05P	5.00	7.55	9.75
A125H-06P	6.25	8.80	11.00
A125H-07P	7.50	10.05	12.25
A125H-08P	8.75	11.30	13.50
A125H-09P	10.00	12.55	14.75
A125H-10P	11.25	13.80	16.00
A125H-11P	12.50	15.05	17.25
A125H-12P	13.75	16.30	18.50
A125H-13P	15.00	17.55	19.75
A125H-14P	16.25	18.80	21.00
A125H-15P	17.50	20.05	22.25
A125H-20P	23.75	26.30	28.50
A125H-25P	30.00	32.55	34.75
A125H-30P	36.25	38.80	41.00

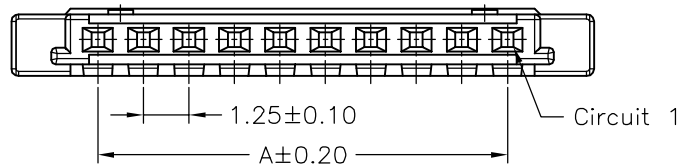

			UNIT	SCALE	SHEET	TITLE:
			mm		1 of 1	
			DRAWN BY		APPROVED BY	1.25mm PITCH HOUSING ULTRA LOW PROFILE
			董正一		董正一	
B3	REVISE	2007.06.29	2001.04.17		2001.04.17	
B2	REVISE	2006.12.28	GENERAL TOLERANCE			
B1	REVISE	2006.11.30	X. X±0.25	ANGLE±		
B0	NEW RELEASE	2005.12.10	X. XX±0.15			
REV.	DESCRIPTION	DATE	X. XXX±0.05			DRAW NO. : A1255H-XP
						REV. B3