
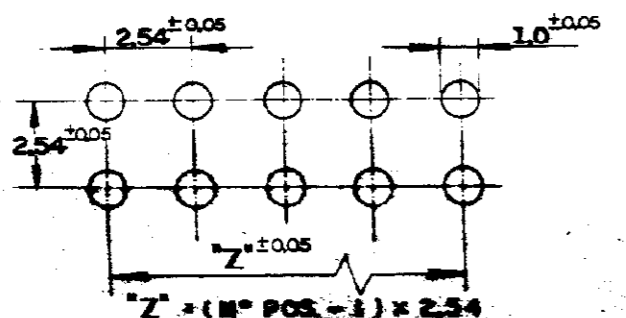


C 880160/161/162

DO NOT SCALE
DIMENSIONS IN MM.

METRIC

3rd ANGLE PROJECTION

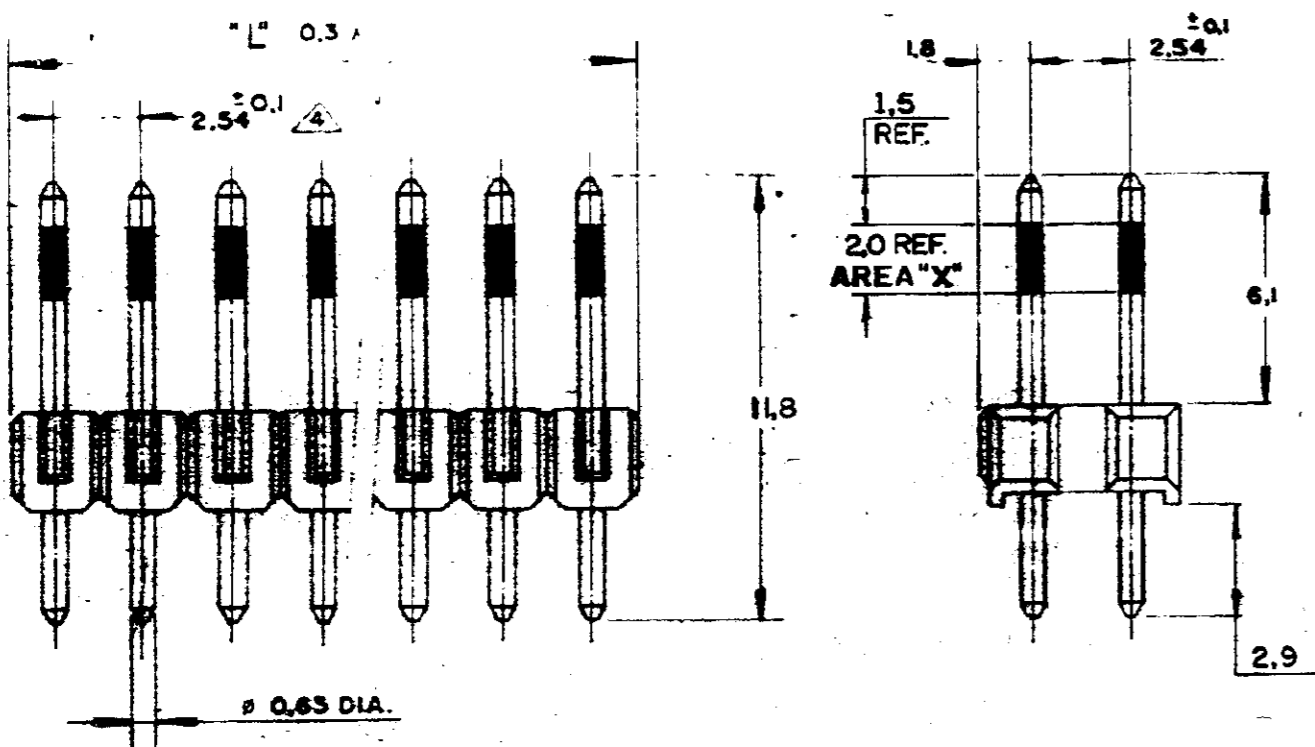

FURAÇÃO RECOMENDADA P/PLACA DE C.I.
P.C. BOARD MOUNTING AND HOLE PATTERN

NOTAS:

- 1 CONTACTO: LATÃO, C/ 0,38 μm MIN. DE Au NA AREA "X"; 2,54 μm MIN. DE SnPb NA AREA DE SOLDA, AMBOS SOBRE BANHO TOTAL DE 1,27 μm MIN. DE Ni.
RECEPTACULO: TERMOPLASTICO C/ F. VIDRO V-O, PRETO.
CONTACT: BRASS, W/ 0,38 μm MIN. Au ON "X" AREA; 2,54 μm MIN. SnPb ON SOLDER AREA, BOTH OVER TOTAL PLATING 1,27 μm MIN. Ni.
HOUSING: THERMOPLASTIC W/GLASS F. V-O, BLACK.
- 2 SIMILAR À NOTA 1, EXCETO PELA AREA "X", C/ 0,76 μm MIN. DE Au.
SIMILAR TO NOTE 1, EXCEPT BY "X" AREA, W/ 0,76 μm MIN. Au.
- 3 CONTACTO: LATÃO, C/ 2,54 μm MIN. DE Sn SOBRE 1,27 μm MIN. DE Ni. EM TODO CONTATO.
RECEPTACULO: TERMOPLASTICO C/ F. VIDRO V-O, PRETO.
CONTACT: BRASS, W/ 2,54 μm MIN. Sn OVER TOTAL PLATING 1,27 μm MIN. Ni.
HOUSING: THERMOPLASTIC W/GLASS F. V-O, BLACK.
- 4 TOLERANCIA NÃO CUMULATIVA.
TOLERANCE NON-CUMULATIVE.

INATIVO
INACTIVE

| | | | | | | |
|--------|----|----|----|----|----|----|
| 127,00 | 50 | 5- | -0 | 5- | -0 | -0 |
| 124,46 | 49 | 4- | -9 | 4- | -9 | -9 |
| 121,92 | 48 | 4- | -8 | 4- | -8 | -8 |
| 119,38 | 47 | 4- | -7 | 4- | -7 | -7 |
| 116,84 | 46 | 4- | -6 | 4- | -6 | -6 |
| 114,30 | 45 | 4- | -5 | 4- | -5 | -5 |
| 111,76 | 44 | 4- | -4 | 4- | -4 | -4 |
| 109,22 | 43 | 4- | -3 | 4- | -3 | -3 |
| 106,68 | 42 | 4- | -2 | 4- | -2 | -2 |
| 104,14 | 41 | 4- | -1 | 4- | -1 | -1 |
| 101,60 | 40 | 4- | 0 | 4- | 0 | 0 |
| 99,06 | 39 | 3- | -9 | 3- | -9 | -9 |
| 96,52 | 38 | 3- | -8 | 3- | -8 | -8 |
| 93,98 | 37 | 3- | -7 | 3- | -7 | -7 |
| 91,44 | 36 | 3- | -6 | 3- | -6 | -6 |
| 88,90 | 35 | 3- | -5 | 3- | -5 | -5 |
| 86,36 | 34 | 3- | -4 | 3- | -4 | -4 |
| 83,82 | 33 | 3- | -3 | 3- | -3 | -3 |
| 81,28 | 32 | 3- | -2 | 3- | -2 | -2 |
| 78,74 | 31 | 3- | -1 | 3- | -1 | -1 |
| 76,20 | 30 | 3- | 0 | 3- | 0 | 0 |
| 73,66 | 29 | 2- | -9 | 2- | -9 | -9 |
| 71,12 | 28 | 2- | -8 | 2- | -8 | -8 |
| 68,58 | 27 | 2- | -7 | 2- | -7 | -7 |
| 66,04 | 26 | 2- | -6 | 2- | -6 | -6 |
| 63,50 | 25 | 2- | -5 | 2- | -5 | -5 |
| 60,96 | 24 | 2- | -4 | 2- | -4 | -4 |
| 58,42 | 23 | 2- | -3 | 2- | -3 | -3 |
| 55,88 | 22 | 2- | -2 | 2- | -2 | -2 |
| 53,34 | 21 | 2- | -1 | 2- | -1 | -1 |
| 50,80 | 20 | 2- | 0 | 2- | 0 | 0 |
| 48,26 | 19 | 1- | -9 | 1- | -9 | -9 |
| 45,72 | 18 | 1- | -8 | 1- | -8 | -8 |
| 43,18 | 17 | 1- | -7 | 1- | -7 | -7 |
| 40,64 | 16 | 1- | -6 | 1- | -6 | -6 |
| 38,10 | 15 | 1- | -5 | 1- | -5 | -5 |
| 35,56 | 14 | 1- | -4 | 1- | -4 | -4 |
| 33,02 | 13 | 1- | -3 | 1- | -3 | -3 |
| 30,48 | 12 | 1- | -2 | 1- | -2 | -2 |
| 27,94 | 11 | 1- | -1 | 1- | -1 | -1 |
| 25,40 | 10 | 1- | 0 | 1- | 0 | 0 |
| 22,86 | 9 | - | -9 | - | -9 | -9 |
| 20,32 | 8 | - | -8 | - | -8 | -8 |
| 17,78 | 7 | - | -7 | - | -7 | -7 |
| 15,24 | 6 | - | -6 | - | -6 | -6 |
| 12,70 | 5 | - | -5 | - | -5 | -5 |
| 10,16 | 4 | - | -4 | - | -4 | -4 |
| 7,62 | 3 | - | -3 | - | -3 | -3 |
| 5,08 | 2 | - | -2 | - | -2 | -2 |
| 2,54 | 1 | - | -1 | - | -1 | -1 |

880162 -1 880161 -1 880160 -1

"L" : 0,3 Nº DE POSIÇÕES

CUSTOMER DWG
for REFERENCE ONLY

THIS DRAWING IS UNPUBLISHED / RELEASED FOR PUBLICATION
C. COPYRIGHT IS BY AMP DO BRASIL LTDA S.P. ALL INTERNATIONAL RIGHTS
RESERVED AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENT PENDING

TOLERANCES UNLESS OTHERWISE STATED:
DEC COG
ANGLES 30°

WIRE DIA RANGE WIRE RANGE SCALE

AMP AMP do BRASIL LTDA
São Paulo, Brasil

REVISIONS:
D. ZENARO / EDU 3/23/83
C. ZENARO / EDU 2/24/83
E. ALT. ACAB. DO PINO 15/11/83

CHK TCA, 25-9-83

AMP MOD II PIN HEADER, DOUBLE ROW, STRAIGHT (Round Post)

REV 12

C 880160/161/162 1 of 1