

**FIXED POSITIVE OUTPUT 3-TERMINAL REGULATOR SERIES**

**DESCRIPTION**

M5F78MXX is a semiconductor integrated circuit which is designed for 3 terminal regulator which is available for maximum load current 500mA class positive output.

An over current protection circuit, heat protection circuit and ASO protection circuit are included.



Especially, the characteristics of Ripple rejection ratio and output impedance are 5 to 10 times superior to the original ones, which make the device suitable for use in a wide range of power supplies such as microcomputer power supply.

**FEATURES**

- No need for external connecting parts
- Ripple rejection ratio . . . . . 90dB
- Output impedance . . . . . 5mΩ
- Variety of output voltage ranks  
 (5V, 6V, 7V, 8V, 9V, 10V, 12V, 15V, 18V, 20V, 24V)

**APPLICATION**

For general power supply of various types of electronic equipment such as VCR, CD

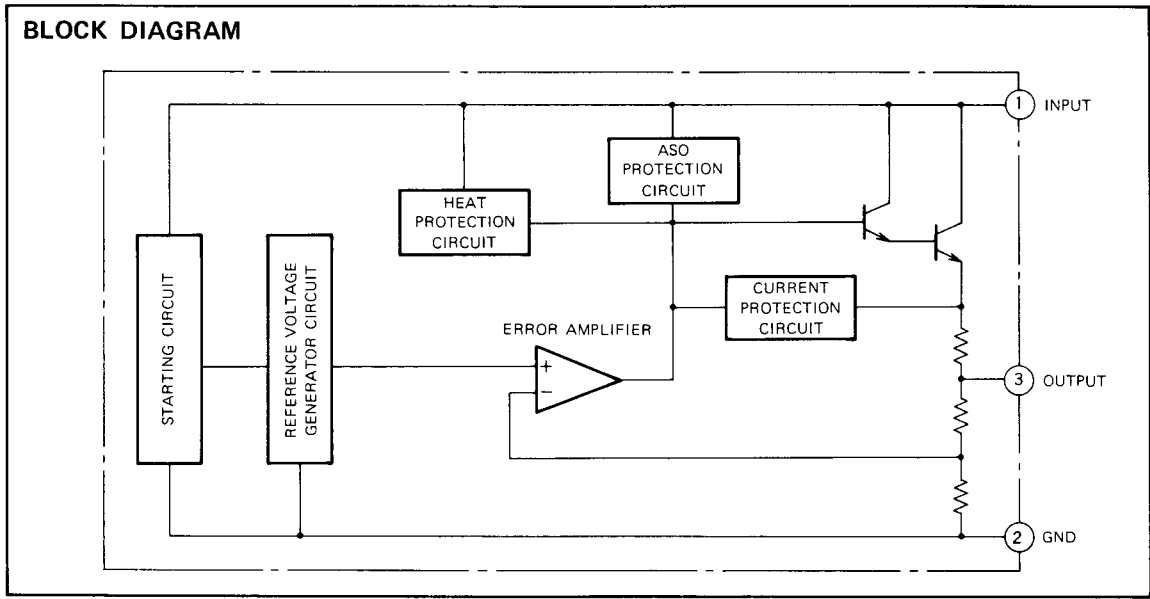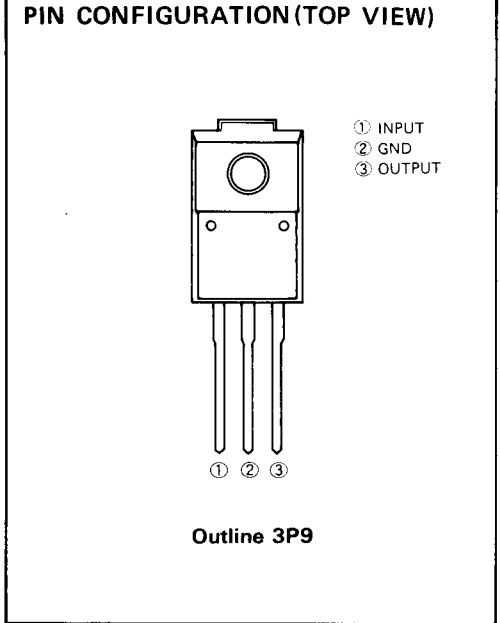


**FIXED POSITIVE OUTPUT 3-TERMINAL REGULATOR SERIES**

**ABSOLUTE MAXIMUM RATINGS** ( $T_a = 25^\circ\text{C}$ , unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
$V_{IN}$	Input voltage		35/40*	V
$P_d$	Power dissipation		2 (no heat sink)	W
			20 (with infinite heat sink)	
$T_a$	Operating temperature		-20 ~ +85	$^\circ\text{C}$
$T_J$	Junction temperature		-20 ~ +150	$^\circ\text{C}$
$T_{stg}$	Storage temperature		-55 ~ +150	$^\circ\text{C}$

\*M5F78M24

**STANDARD CONNECTION**

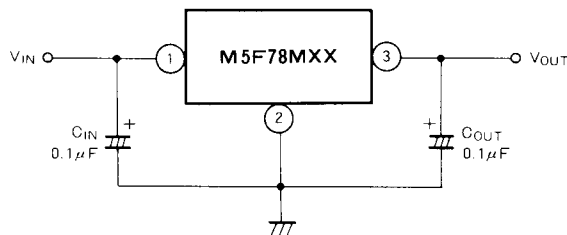

**ELECTRIC CHARACTERISTICS**

**M5F78M05** ( $V_{IN} = 10\text{V}$ ,  $I_O = 350\text{mA}$ ,  $0^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$ )

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
$V_{OUT}$	Output voltage	$T_J = 25^\circ\text{C}$ $7\text{V} \leq V_{IN} \leq 20\text{V}$ , $5\text{mA} \leq I_O \leq 350\text{mA}$	4.8	5.0	5.2	V
$\Delta V_O$ Line	Input stability	$T_J = 25^\circ\text{C}$ , $7\text{V} \leq V_{IN} \leq 25\text{V}$		3	100	mV
		$T_J = 25^\circ\text{C}$ , $8\text{V} \leq V_{IN} \leq 25\text{V}$		1	50	
$\Delta V_O$ Load	Load stability	$T_J = 25^\circ\text{C}$ , $5\text{mA} \leq I_O \leq 500\text{mA}$		4	100	mV
		$T_J = 25^\circ\text{C}$ , $5\text{mA} \leq I_O \leq 200\text{mA}$		2	50	
$I_{CC}$	Operating current	$T_J = 25^\circ\text{C}$		3	5	mA
$\Delta I_{CC}$	Operating current change	$8\text{V} \leq V_{IN} \leq 25\text{V}$ , $I_O = 200\text{mA}$			0.8	mA
		$5\text{mA} \leq I_O \leq 350\text{mA}$			0.5	
$V_N$	Output noise voltage	$T_J = 25^\circ\text{C}$ , 10Hz ~ 100kHz		50		$\mu\text{V}_{rms}$
R.R	Ripple rejection ratio	$f = 120\text{Hz}$ , $8\text{V} \leq V_{IN} \leq 18\text{V}$	72	90		dB
$V_{DROP}$	Input output voltage difference	$T_J = 25^\circ\text{C}$		2		V
$R_O$	Output resistance	$f = 1\text{kHz}$		5		m $\Omega$
$I_{OS}$	Output short current	$T_J = 25^\circ\text{C}$ , $V_{IN} = 35\text{V}$		200		mA
$I_{OP}$	Output peak current	$T_J = 25^\circ\text{C}$		0.7		A
$\Delta V_O / \Delta T_J$	Output voltage temperature coefficient	$I_O = 5\text{mA}$		0.2		mV/ $^\circ\text{C}$

**FIXED POSITIVE OUTPUT 3-TERMINAL REGULATOR SERIES****M5F78M06** ( $V_{IN}=11V$ ,  $I_O=350mA$ ,  $0^\circ C \leq T_J \leq 125^\circ C$ )

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
$V_{OUT}$	Output voltage	$T_J = 25^\circ C$	5.75	6.0	6.25	V
		$8V \leq V_{IN} \leq 21V$ , $5mA \leq I_O \leq 350mA$	5.7		6.3	
$\Delta V_O$ Line	Input stability	$T_J = 25^\circ C$ , $8V \leq V_{IN} \leq 25V$		3	100	mV
		$T_J = 25^\circ C$ , $9V \leq V_{IN} \leq 25V$		1	50	
$\Delta V_O$ Load	Load stability	$T_J = 25^\circ C$ , $5mA \leq I_O \leq 500mA$		5	120	mV
		$T_J = 25^\circ C$ , $5mA \leq I_O \leq 200mA$		2	60	
$I_{CC}$	Operating current	$T_J = 25^\circ C$		3	5	mA
$\Delta I_{CC}$	Operating current change	$9V \leq V_{IN} \leq 25V$ , $I_O = 200mA$			0.8	mA
		$5mA \leq I_O \leq 350mA$			0.5	
$V_N$	Output noise voltage	$T_J = 25^\circ C$ , $10Hz \sim 100kHz$		60		$\mu V_{rms}$
R.R	Ripple rejection ratio	$f = 120Hz$ , $9V \leq V_{IN} \leq 19V$	70	88		dB
$V_{DROP}$	Input output voltage difference	$T_J = 25^\circ C$		2		V
$R_O$	Output resistance	$f = 1kHz$		5		m $\Omega$
$I_{OS}$	Output short current	$T_J = 25^\circ C$ , $V_{IN} = 35V$		200		mA
$I_{OP}$	Output peak current	$T_J = 25^\circ C$		0.7		A
$\Delta V_O/\Delta T_J$	Output voltage temperature coefficient	$I_O = 5mA$		0.2		mV/ $^\circ C$

**M5F78M07** ( $V_{IN}=13V$ ,  $I_O=350mA$ ,  $0^\circ C \leq T_J \leq 125^\circ C$ )

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
$V_{OUT}$	Output voltage	$T_J = 25^\circ C$	6.7	7.0	7.3	V
		$9V \leq V_{IN} \leq 22V$ , $5mA \leq I_O \leq 350mA$	6.65		7.35	
$\Delta V_O$ Line	Input stability	$T_J = 25^\circ C$ , $9V \leq V_{IN} \leq 25V$		4	100	mV
		$T_J = 25^\circ C$ , $10V \leq V_{IN} \leq 25V$		2	50	
$\Delta V_O$ Load	Load stability	$T_J = 25^\circ C$ , $5mA \leq I_O \leq 500mA$		6	140	mV
		$T_J = 25^\circ C$ , $5mA \leq I_O \leq 200mA$		3	70	
$I_{CC}$	Operating current	$T_J = 25^\circ C$		3	5	mA
$\Delta I_{CC}$	Operating current change	$10V \leq V_{IN} \leq 25V$ , $I_O = 200mA$			0.8	mA
		$5mA \leq I_O \leq 350mA$			0.5	
$V_N$	Output noise voltage	$T_J = 25^\circ C$ , $10Hz \sim 100kHz$		71		$\mu V_{rms}$
R.R	Ripple rejection ratio	$f = 120Hz$ , $10V \leq V_{IN} \leq 20V$	69	87		dB
$V_{DROP}$	Input output voltage difference	$T_J = 25^\circ C$		2		V
$R_O$	Output resistance	$f = 1kHz$		5		m $\Omega$
$I_{OS}$	Output short current	$T_J = 25^\circ C$ , $V_{IN} = 35V$		200		mA
$I_{OP}$	Output peak current	$T_J = 25^\circ C$		0.7		A
$\Delta V_O/\Delta T_J$	Output voltage temperature coefficient	$I_O = 5mA$		0.3		mV/ $^\circ C$

**FIXED POSITIVE OUTPUT 3-TERMINAL REGULATOR SERIES****M5F78M08** ( $V_{IN} = 14V$ ,  $I_O = 350mA$ ,  $0^\circ C \leq T_J \leq 125^\circ C$ )

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
$V_{OUT}$	Output voltage	$T_J = 25^\circ C$	7.7	8.0	8.3	V
		$10.5V \leq V_{IN} \leq 23V$ , $5mA \leq I_O \leq 350mA$	7.6		8.4	
$\Delta V_O$ Line	Input stability	$T_J = 25^\circ C$ , $10.5V \leq V_{IN} \leq 25V$		5	100	mV
		$T_J = 25^\circ C$ , $11V \leq V_{IN} \leq 25V$		2	50	
$\Delta V_O$ Load	Load stability	$T_J = 25^\circ C$ , $5mA \leq I_O \leq 500mA$		6	160	mV
		$T_J = 25^\circ C$ , $5mA \leq I_O \leq 200mA$		3	80	
$I_{CC}$	Operating current	$T_J = 25^\circ C$		3	5	mA
$\Delta I_{CC}$	Operating current change	$10.5V \leq V_{IN} \leq 25V$ , $I_O = 200mA$			0.8	mA
		$5mA \leq I_O \leq 350mA$			0.5	
$V_N$	Output noise voltage	$T_J = 25^\circ C$ , 10Hz ~ 100kHz		81		$\mu V_{rms}$
R.R	Ripple rejection ratio	$f = 120Hz$ , $11.5V \leq V_{IN} \leq 21.5V$	68	86		dB
$V_{DROP}$	Input output voltage difference	$T_J = 25^\circ C$		2		V
$R_O$	Output resistance	$f = 1kHz$		5		m $\Omega$
$I_{OS}$	Output short current	$T_J = 25^\circ C$ , $V_{IN} = 35V$		200		mA
$I_{OP}$	Output peak current	$T_J = 25^\circ C$		0.7		A
$\Delta V_O / \Delta T_J$	Output voltage temperature coefficient	$I_O = 5mA$		0.3		mV/ $^\circ C$

**M5F78M09** ( $V_{IN} = 15V$ ,  $I_O = 350mA$ ,  $0^\circ C \leq T_J \leq 125^\circ C$ )

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
$V_{OUT}$	Output voltage	$T_J = 25^\circ C$	8.6	9.0	9.4	V
		$11.5V \leq V_{IN} \leq 24V$ , $5mA \leq I_O \leq 350mA$	8.55		9.45	
$\Delta V_O$ Line	Input stability	$T_J = 25^\circ C$ , $12V \leq V_{IN} \leq 25V$		5	100	mV
		$T_J = 25^\circ C$ , $13V \leq V_{IN} \leq 25V$		2	50	
$\Delta V_O$ Load	Load stability	$T_J = 25^\circ C$ , $5mA \leq I_O \leq 500mA$		7	180	mV
		$T_J = 25^\circ C$ , $5mA \leq I_O \leq 200mA$		3	90	
$I_{CC}$	Operating current	$T_J = 25^\circ C$		3	5	mA
$\Delta I_{CC}$	Operating current change	$12V \leq V_{IN} \leq 28V$ , $I_O = 200mA$			0.8	mA
		$5mA \leq I_O \leq 350mA$			0.5	
$V_N$	Output noise voltage	$T_J = 25^\circ C$ , 10Hz ~ 100kHz		91		$\mu V_{rms}$
R.R	Ripple rejection ratio	$f = 120Hz$ , $12.5V \leq V_{IN} \leq 22.5V$	67	85		dB
$V_{DROP}$	Input output voltage difference	$T_J = 25^\circ C$		2		V
$R_O$	Output resistance	$f = 1kHz$		5		m $\Omega$
$I_{OS}$	Output short current	$T_J = 25^\circ C$ , $V_{IN} = 35V$		200		mA
$I_{OP}$	Output peak current	$T_J = 25^\circ C$		0.7		A
$\Delta V_O / \Delta T_J$	Output voltage temperature coefficient	$I_O = 5mA$		0.4		mV/ $^\circ C$

**FIXED POSITIVE OUTPUT 3-TERMINAL REGULATOR SERIES****M5F78M10** ( $V_{IN} = 17V$ ,  $I_O = 350mA$ ,  $0^\circ C \leq T_J \leq 125^\circ C$ )

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V <sub>OUT</sub>	Output voltage	T <sub>J</sub> = 25°C	9.6	10.0	10.4	V
		12.5V ≤ V <sub>IN</sub> ≤ 25V, 5mA ≤ I <sub>O</sub> ≤ 350mA	9.5		10.5	
ΔV <sub>O</sub> Line	Input stability	T <sub>J</sub> = 25°C, 12.5V ≤ V <sub>IN</sub> ≤ 28V		6	100	mV
		T <sub>J</sub> = 25°C, 14V ≤ V <sub>IN</sub> ≤ 28V		2	50	
ΔV <sub>O</sub> Load	Load stability	T <sub>J</sub> = 25°C, 5mA ≤ I <sub>O</sub> ≤ 500mA		8	200	mV
		T <sub>J</sub> = 25°C, 5mA ≤ I <sub>O</sub> ≤ 200mA		4	100	
I <sub>CC</sub>	Operating current	T <sub>J</sub> = 25°C		3	5	mA
ΔI <sub>CC</sub>	Operating current change	12.5V ≤ V <sub>IN</sub> ≤ 28V, I <sub>O</sub> = 200mA			0.8	mA
		5mA ≤ I <sub>O</sub> ≤ 350mA			0.5	
V <sub>N</sub>	Output noise voltage	T <sub>J</sub> = 25°C, 10Hz ~ 100kHz		100		μV <sub>rms</sub>
R.R	Ripple rejection ratio	f = 120Hz, 13V ≤ V <sub>IN</sub> ≤ 23V	66	84		dB
V <sub>DROP</sub>	Input output voltage difference	T <sub>J</sub> = 25°C		2		V
R <sub>O</sub>	Output resistance	f = 1kHz		6		mΩ
I <sub>OS</sub>	Output short current	T <sub>J</sub> = 25°C, V <sub>IN</sub> = 35V		200		mA
I <sub>OP</sub>	Output peak current	T <sub>J</sub> = 25°C		0.7		A
ΔV <sub>O</sub> /ΔT <sub>J</sub>	Output voltage temperature coefficient	I <sub>O</sub> = 5mA		0.4		mV/°C

**M5F78M12** ( $V_{IN} = 19V$ ,  $I_O = 350mA$ ,  $0^\circ C \leq T_J \leq 125^\circ C$ )

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V <sub>OUT</sub>	Output voltage	T <sub>J</sub> = 25°C	11.5	12.0	12.5	V
		14.5V ≤ V <sub>IN</sub> ≤ 27V, 5mA ≤ I <sub>O</sub> ≤ 350mA	11.4		12.6	
ΔV <sub>O</sub> Line	Input stability	T <sub>J</sub> = 25°C, 14.5V ≤ V <sub>IN</sub> ≤ 30V		7	100	mV
		T <sub>J</sub> = 25°C, 16V ≤ V <sub>IN</sub> ≤ 30V		2	50	
ΔV <sub>O</sub> Load	Load stability	T <sub>J</sub> = 25°C, 5mA ≤ I <sub>O</sub> ≤ 500mA		9	240	mV
		T <sub>J</sub> = 25°C, 5mA ≤ I <sub>O</sub> ≤ 200mA		5	120	
I <sub>CC</sub>	Operating current	T <sub>J</sub> = 25°C		3	5	mA
ΔI <sub>CC</sub>	Operating current change	15V ≤ V <sub>IN</sub> ≤ 31V, I <sub>O</sub> = 200mA			0.8	mA
		5mA ≤ I <sub>O</sub> ≤ 350mA			0.5	
V <sub>N</sub>	Output noise voltage	T <sub>J</sub> = 25°C, 10Hz ~ 100kHz		120		μV <sub>rms</sub>
R.R	Ripple rejection ratio	f = 120Hz, 15V ≤ V <sub>IN</sub> ≤ 25V	64	82		dB
V <sub>DROP</sub>	Input output voltage difference	T <sub>J</sub> = 25°C		2		V
R <sub>O</sub>	Output resistance	f = 1kHz		6		mΩ
I <sub>OS</sub>	Output short current	T <sub>J</sub> = 25°C, V <sub>IN</sub> = 35V		200		mA
I <sub>OP</sub>	Output peak current	T <sub>J</sub> = 25°C		0.7		A
ΔV <sub>O</sub> /ΔT <sub>J</sub>	Output voltage temperature coefficient	I <sub>O</sub> = 5mA		0.5		mV/°C

**FIXED POSITIVE OUTPUT 3-TERMINAL REGULATOR SERIES****M5F78M15** ( $V_{IN}=23V$ ,  $I_O=350mA$ ,  $0^\circ C \leq T_J \leq 125^\circ C$ )

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V <sub>OUT</sub>	Output voltage	T <sub>J</sub> = 25°C	14.4	15.0	15.6	V
		17.5V ≤ V <sub>IN</sub> ≤ 30V, 5mA ≤ I <sub>O</sub> ≤ 350mA	14.25		15.75	
ΔV <sub>O</sub> Line	Input stability	T <sub>J</sub> = 25°C, 17.5V ≤ V <sub>IN</sub> ≤ 30V		9	100	mV
		T <sub>J</sub> = 25°C, 20V ≤ V <sub>IN</sub> ≤ 30V		3	50	
ΔV <sub>O</sub> Load	Load stability	T <sub>J</sub> = 25°C, 5mA ≤ I <sub>O</sub> ≤ 500mA		12	300	mV
		T <sub>J</sub> = 25°C, 5mA ≤ I <sub>O</sub> ≤ 200mA		6	150	
I <sub>CC</sub>	Operating current	T <sub>J</sub> = 25°C		3	5	mA
ΔI <sub>CC</sub>	Operating current change	17.5V ≤ V <sub>IN</sub> ≤ 30V, I <sub>O</sub> = 200mA			0.8	mA
		5mA ≤ I <sub>O</sub> ≤ 350mA			0.5	
V <sub>N</sub>	Output noise voltage	T <sub>J</sub> = 25°C, 10Hz ~ 100kHz		150		μV <sub>rms</sub>
R.R	Ripple rejection ratio	f = 120Hz, 18.5V ≤ V <sub>IN</sub> ≤ 28.5V	62	80		dB
V <sub>DROP</sub>	Input output voltage difference	T <sub>J</sub> = 25°C		2		V
R <sub>O</sub>	Output resistance	f = 1kHz		7		mΩ
I <sub>OS</sub>	Output short current	T <sub>J</sub> = 25°C, V <sub>IN</sub> = 35V		200		mA
I <sub>OP</sub>	Output peak current	T <sub>J</sub> = 25°C		0.7		A
ΔV <sub>O</sub> /ΔT <sub>J</sub>	Output voltage temperature coefficient	I <sub>O</sub> = 5mA		0.6		mV/°C

**M5F78M18** ( $V_{IN}=27V$ ,  $I_O=350mA$ ,  $0^\circ C \leq T_J \leq 125^\circ C$ )

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V <sub>OUT</sub>	Output voltage	T <sub>J</sub> = 25°C	17.3	18.0	18.7	V
		21V ≤ V <sub>IN</sub> ≤ 33V, 5mA ≤ I <sub>O</sub> ≤ 350mA	17.1		18.9	
ΔV <sub>O</sub> Line	Input stability	T <sub>J</sub> = 25°C, 21V ≤ V <sub>IN</sub> ≤ 33V		10	100	mV
		T <sub>J</sub> = 25°C, 24V ≤ V <sub>IN</sub> ≤ 33V		3	50	
ΔV <sub>O</sub> Load	Load stability	T <sub>J</sub> = 25°C, 5mA ≤ I <sub>O</sub> ≤ 500mA		14	360	mV
		T <sub>J</sub> = 25°C, 5mA ≤ I <sub>O</sub> ≤ 200mA		7	180	
I <sub>CC</sub>	Operating current	T <sub>J</sub> = 25°C		3	5	mA
ΔI <sub>CC</sub>	Operating current change	21V ≤ V <sub>IN</sub> ≤ 35V, I <sub>O</sub> = 200mA			0.8	mA
		5mA ≤ I <sub>O</sub> ≤ 350mA			0.5	
V <sub>N</sub>	Output noise voltage	T <sub>J</sub> = 25°C, 10Hz ~ 100kHz		180		μV <sub>rms</sub>
R.R	Ripple rejection ratio	f = 120Hz, 22V ≤ V <sub>IN</sub> ≤ 32V	61	79		dB
V <sub>DROP</sub>	Input output voltage difference	T <sub>J</sub> = 25°C		2		V
R <sub>O</sub>	Output resistance	f = 1kHz		7		mΩ
I <sub>OS</sub>	Output short current	T <sub>J</sub> = 25°C, V <sub>IN</sub> = 35V		200		mA
I <sub>OP</sub>	Output peak current	T <sub>J</sub> = 25°C		0.7		A
ΔV <sub>O</sub> /ΔT <sub>J</sub>	Output voltage temperature coefficient	I <sub>O</sub> = 5mA		0.7		mV/°C

**FIXED POSITIVE OUTPUT 3-TERMINAL REGULATOR SERIES**

**M5F78M20** ( $V_{IN}=30V, I_O=350mA, 0^\circ C \leq T_J \leq 125^\circ C$ )

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V <sub>OUT</sub>	Output voltage	T <sub>J</sub> = 25°C	19.2	20.0	20.8	V
		23V ≤ V <sub>IN</sub> ≤ 35V, 5mA ≤ I <sub>O</sub> ≤ 350mA	19.0		21.0	
ΔV <sub>O</sub> Line	Input stability	T <sub>J</sub> = 25°C, 23V ≤ V <sub>IN</sub> ≤ 35V		12	100	mV
		T <sub>J</sub> = 25°C, 24V ≤ V <sub>IN</sub> ≤ 35V		4	50	
ΔV <sub>O</sub> Load	Load stability	T <sub>J</sub> = 25°C, 5mA ≤ I <sub>O</sub> ≤ 500mA		16	400	mV
		T <sub>J</sub> = 25°C, 5mA ≤ I <sub>O</sub> ≤ 200mA		8	200	
I <sub>CC</sub>	Operating current	T <sub>J</sub> = 25°C		3	5	mA
ΔI <sub>CC</sub>	Operating current change	23V ≤ V <sub>IN</sub> ≤ 35V, I <sub>O</sub> = 200mA			0.8	mA
		5mA ≤ I <sub>O</sub> ≤ 350mA			0.5	
V <sub>N</sub>	Output noise voltage	T <sub>J</sub> = 25°C, 10Hz ~ 100kHz		200		μV <sub>rms</sub>
R.R	Ripple rejection ratio	f = 120Hz, 24V ≤ V <sub>IN</sub> ≤ 34V	60	78		dB
V <sub>DROP</sub>	Input output voltage difference	T <sub>J</sub> = 25°C		2		V
R <sub>O</sub>	Output resistance	f = 1kHz		8		mΩ
I <sub>OS</sub>	Output short current	T <sub>J</sub> = 25°C, V <sub>IN</sub> = 35V		200		mA
I <sub>OP</sub>	Output peak current	T <sub>J</sub> = 25°C		0.7		A
ΔV <sub>O</sub> /ΔT <sub>J</sub>	Output voltage temperature coefficient	I <sub>O</sub> = 5mA		0.8		mV/°C

**M5F78M24** ( $V_{IN}=33V, I_O=350mA, 0^\circ C \leq T_J \leq 125^\circ C$ )

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V <sub>OUT</sub>	Output voltage	T <sub>J</sub> = 25°C	23.0	24.0	25.0	V
		27V ≤ V <sub>IN</sub> ≤ 38V, 5mA ≤ I <sub>O</sub> ≤ 350mA	22.8		25.2	
ΔV <sub>O</sub> Line	Input stability	T <sub>J</sub> = 25°C, 27V ≤ V <sub>IN</sub> ≤ 38V		14	100	mV
		T <sub>J</sub> = 25°C, 28V ≤ V <sub>IN</sub> ≤ 38V		5	50	
ΔV <sub>O</sub> Load	Load stability	T <sub>J</sub> = 25°C, 5mA ≤ I <sub>O</sub> ≤ 500mA		19	480	mV
		T <sub>J</sub> = 25°C, 5mA ≤ I <sub>O</sub> ≤ 200mA		9	240	
I <sub>CC</sub>	Operating current	T <sub>J</sub> = 25°C		3	5	mA
ΔI <sub>CC</sub>	Operating current change	27V ≤ V <sub>IN</sub> ≤ 38V, I <sub>O</sub> = 200mA			0.8	mA
		5mA ≤ I <sub>O</sub> ≤ 350mA			0.5	
V <sub>N</sub>	Output noise voltage	T <sub>J</sub> = 25°C, 10Hz ~ 100kHz		240		μV <sub>rms</sub>
R.R	Ripple rejection ratio	f = 120Hz, 28V ≤ V <sub>IN</sub> ≤ 38V	58	76		dB
V <sub>DROP</sub>	Input output voltage difference	T <sub>J</sub> = 25°C		2		V
R <sub>O</sub>	Output resistance	f = 1kHz		10		mΩ
I <sub>OS</sub>	Output short current	T <sub>J</sub> = 25°C, V <sub>IN</sub> = 35V		200		mA
I <sub>OP</sub>	Output peak current	T <sub>J</sub> = 25°C		0.7		A
ΔV <sub>O</sub> /ΔT <sub>J</sub>	Output voltage temperature coefficient	I <sub>O</sub> = 5mA		1		mV/°C