


Datamate J-Tek Connectors

Female Crimp Trio-Tek Housings

- ❖ Part numbers are for housings only, see following page for Trio-Tek contacts.
- ❖ Contacts are rear insertable.
- ❖ Crimp inspection window in housing.
- ❖ Mates with all standard Datamate J-Tek male connectors.
- ❖ Ideal for volume applications.

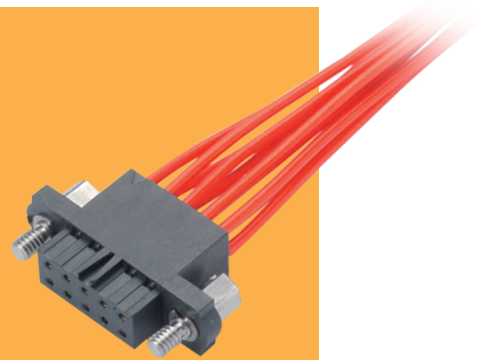

DATAMATE J-TEK

WITHOUT JACKSCREWS		WITH JACKSCREWS										
		<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Hex Slotted Jackscrew</p> </div> <div style="text-align: center;"> <p>Hex Socket Jackscrew</p> </div> </div>										
		<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="2">CALCULATION</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>B + 12</td> </tr> <tr> <td>B</td> <td>Total no. of contacts - 2</td> </tr> <tr> <td>C</td> <td>B + 7</td> </tr> </tbody> </table>		CALCULATION		A	B + 12	B	Total no. of contacts - 2	C	B + 7	
CALCULATION												
A	B + 12											
B	Total no. of contacts - 2											
C	B + 7											
TOOLS		WIRE STRIPPING DETAILS										
<p>Recommended Hand Crimp Tool - Z80-255 Contact Removal Tool - Z80-258</p> <ul style="list-style-type: none"> ❖ Open crimp contacts shown on following page. ❖ Instruction sheets available at www.harwin.com/instructions. 												
HOW TO ORDER												
<p>M80 - 45X XX 98</p>												
<p>SERIES CODE</p>		<p>FINISH</p> <table border="1"> <tr> <td>98</td> <td>Housings</td> </tr> </table>		98	Housings							
98	Housings											
<table border="1"> <thead> <tr> <th colspan="2">TYPE</th> </tr> </thead> <tbody> <tr> <td>454</td> <td>Without Jackscrews</td> </tr> <tr> <td>455</td> <td>With Hex Slotted Jackscrews</td> </tr> <tr> <td>456</td> <td>With Hex Socket Jackscrews</td> </tr> </tbody> </table>		TYPE		454	Without Jackscrews	455	With Hex Slotted Jackscrews	456	With Hex Socket Jackscrews	<p>TOTAL NO. OF CONTACTS</p> <table border="1"> <tr> <td>04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</td> </tr> </table>		04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50
TYPE												
454	Without Jackscrews											
455	With Hex Slotted Jackscrews											
456	With Hex Socket Jackscrews											
04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50												

All dimensions in mm.