

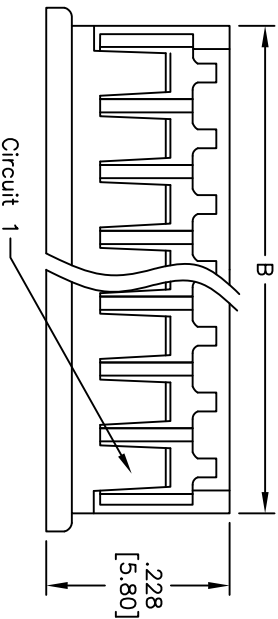


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/23/10	

APPROVED: _____
 DATE: _____ TITLE: _____

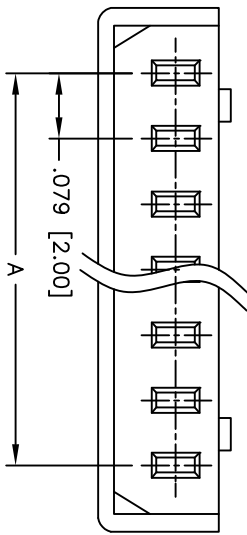

Positions: 2 thru 15
 A = .079 [2.00] x No. of Spaces
 B = .079 [2.00] x No. of Spaces + .114 [2.90]

SPECIFICATIONS:
 Material:
 Insulator: NY66, rated UL 94V-0
 Insulator color: Natural
 Electrical:
 Voltage rating: 125 V AC,DC
 Current rating: 2A AC/DC
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 800 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES	
.X	± .10
.XX	± .020
.XXX	± .015
.XXX	± .015
.XXX	± .010
APPROVALS	DATE
DRAWN AY	11/23/10
CHECKED AH	11/23/10
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	SIZE	PART NO.	REV.
.079 [2.00] CRIMP HOUSING	X	2CH-F-XX	-
REF: S00099T	SCALE: NTS	SHEET 1 OF 1	