

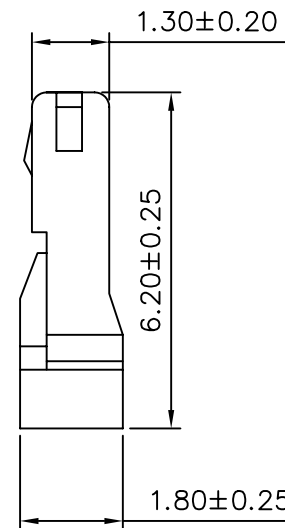


SPECIFICATIONS

Current Rating:1A AC,DC
 Voltage Rating:100V AC,DC
 Temperature Range:-25°C ~+85°C
 Contact Resistance:20Milliohms max.
 Insulation Resistance:500Megohms Min.
 Withstanding Voltage:500V AC /Minute
 Material:Nylon 66,UL 94V-0

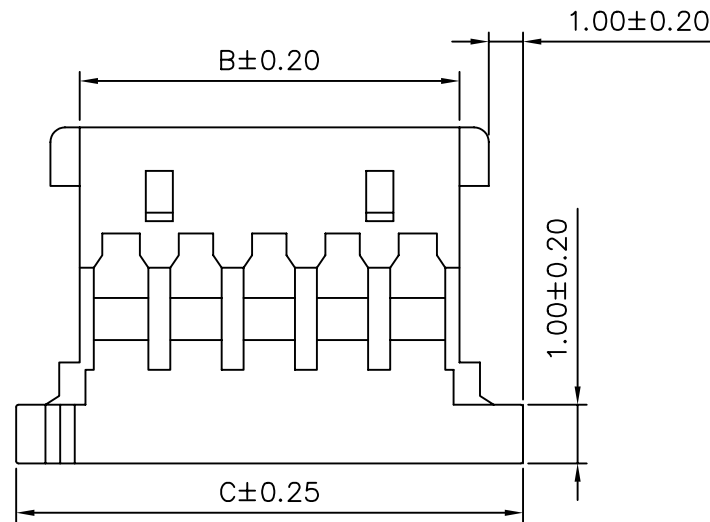

CKT	A	B	C
2	1.25	2.72	5.72
3	2.50	3.97	6.97
4	3.75	5.22	8.22
5	5.00	6.47	9.47
6	6.25	7.72	10.72
7	7.50	8.97	11.97
8	8.75	10.22	13.22
9	10.00	11.47	14.47
10	11.25	12.72	15.72
11	12.50	13.97	16.97
12	13.75	15.22	18.22
14	16.25	17.72	20.72
15	17.50	18.97	21.97
20	23.75	25.22	28.22
30	36.25	37.72	40.72

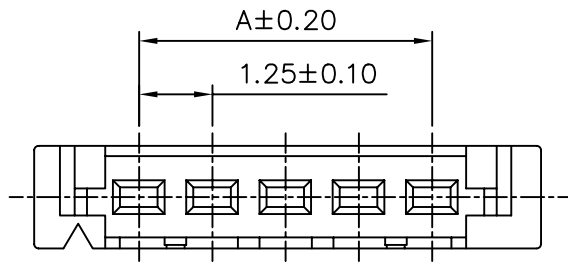

A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 .XXX
PART No. PNMXXH		MEI		
DRAWING No. PNMXXH		CHECKED BY BECKY		
SCALE NONE		DRAWING BY HZF		
REV.	A	UNIT	mm	
AREA	REVISIONS	CHK	DATE	