

PROGRAMMABLE PRECISION REFERENCE


LTL431xxTLT1G

DESCRIPTION

The LTL431 is a three-terminal adjustable regulator with a guaranteed thermal stability over applicable temperature ranges. The output voltage may be set to any value between V_{ref} (approximately 2.5V) and 36V with two external resistors. It provides very wide applications, including shunt regulator, series regulator, switching regulator, voltage reference and others.



FEATURES

- Programmable output Voltage to 36V.
- Low dynamic output impedance 0.2Ω
- Sink current capability of 1 to 100mA.
- Equivalent full-range temperature coefficient of 50ppm/ $^{\circ}C$ typical for operation over full rated operating temperature range.

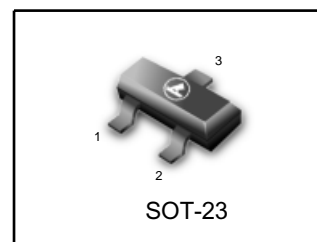

Pin 1: Cathode; 2: Ref; 3: Anode

Pb-Free package is available

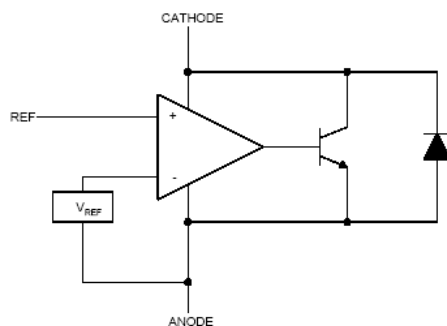BLOCK DIAGRAM


ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

PARAMETER	SYMBOL	VALUE	UNIT
Cathode Voltage	V _K A	36	V
Cathode Current Range(Continuous)	I _K A	-100 ~ +150	mA
Reference Input Current Range	I _{ref}	-0.05 ~ +10	mA
Operating Junction Temperature	T _j	150	°C
Operating Ambient Temperature	T _{opr}	-40 ~ +125	°C
Storage Temperature Temperature	T _{stg}	-65 ~ +150	°C

RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Cathode Voltage	V _K A	V _{REF}		36	V
Cathode Current	I _K A	1		100	mA

ELECTRICAL CHARACTERISTICS (T_a=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reference Input Voltage *	V _{ref}	V _K A=V _{REF} , I _K A=10mA		2.50 2.495		V
Deviation of reference Input Voltage Over temperature(note 1)	ΔV _{ref} /ΔT	V _K A=V _{REF} , I _K A=10mA T _{MIN} ≤T _A ≤T _{MAX}		4.5	17	mV
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage	ΔV _{ref} /ΔV _K A	I _K A=10mA ΔV _K A=10V~V _{REF} ΔV _K A=36V~10V		-1.0 -0.5	-2.7 -2.0	mV/V
Reference Input Current	I _{ref}	I _K A=10mA, R ₁ =10kΩ, R ₂ =∞		1.5	4	μA
Deviation of Reference Input Current Over Full Temperature Range	ΔI _{ref} /ΔT	I _K A=10mA, R ₁ =10kΩ, R ₂ =∞ T _A =full Temperature		0.4	1.2	μA
Minimum Cathode Current for Regulation	I _K A(min)	V _K A=V _{REF}		0.05	0.1	mA
Off-State Cathode Current	I _K A(OFF)	V _K A=36V, V _{REF} =0		0.05	1.0	μA
Dynamic Impedance	Z _K A	V _K A=V _{REF} , I _K A=1 to 100mA f≤1.0kHz		0.15	0.5	Ω

Note1: T_{MIN}= -40 °C, T_{MAX}=+125 °C

*In order to match the special request of customer

*** CLASSIFICATION OF V_{ref} AND PACKAGE**

Type	RanK	Range(V)	Marking	Packa	T _{opr}
LTL431ATLT1G	0.5%	2.487~2.512	LA2	SOT-23	-40~+125 °C
LTL431BTLT1G	1%	2.475~2.525	LB2	SOT-23	-40~+125 °C
LTL431APTLT1G	0.5%	2.482~2.507	LA3	SOT-23	-40~+125 °C
LTL431BPTLT1G	1%	2.470~2.520	LB3	SOT-23	-40~+125 °C











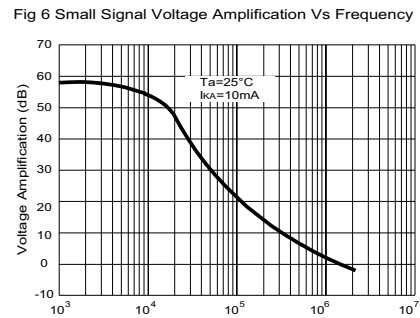
TYPICAL PERFORMANCE CHARACTERISTICS


Fig 7 Stability Boundary Conditions

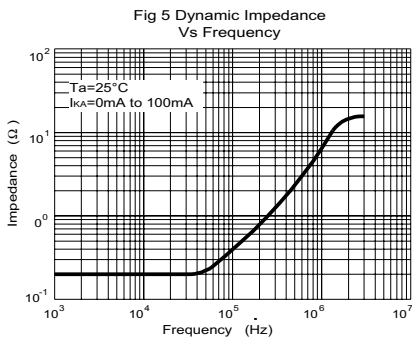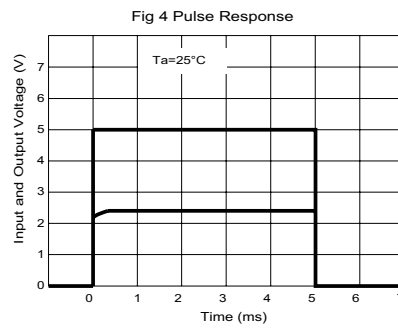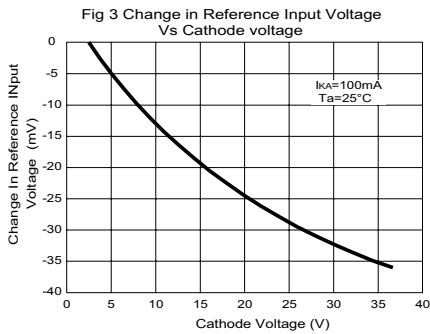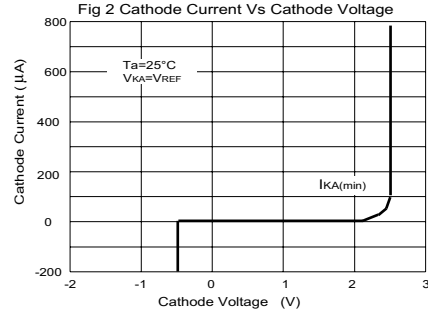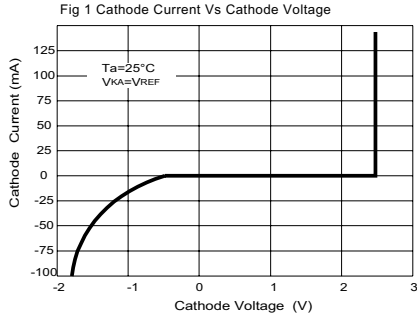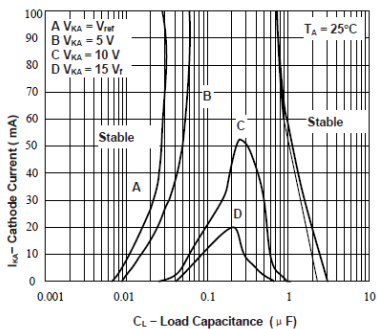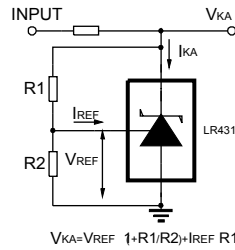


TEST CIRCUIT

 Test Circuit For $V_{KA}=V_{REF}$

 Test Circuit for $V_{KA} \geq V_{REF}$

$$V_{KA} = V_{REF} (1 + R1/R2) + I_{REF} R1$$



 Test Circuit For $I_{KA(OFF)}$
APPLICATION CIRCUIT


Shutdown Regulator




Output Control of a Three-Terminal Fixed Regulator

$$V_o = (1 + R1/R2) V_{REF}$$




Higher-current Shunt Regulator

$$V_o = (1 + R1/R2) V_{REF}$$

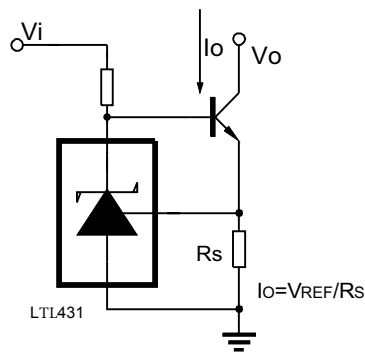


Constant-current Sink

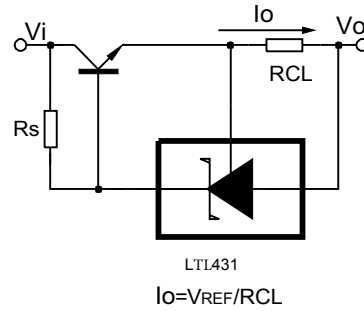

Current Limiting or Current Source

$$I_o = V_{REF}/R_{CL}$$

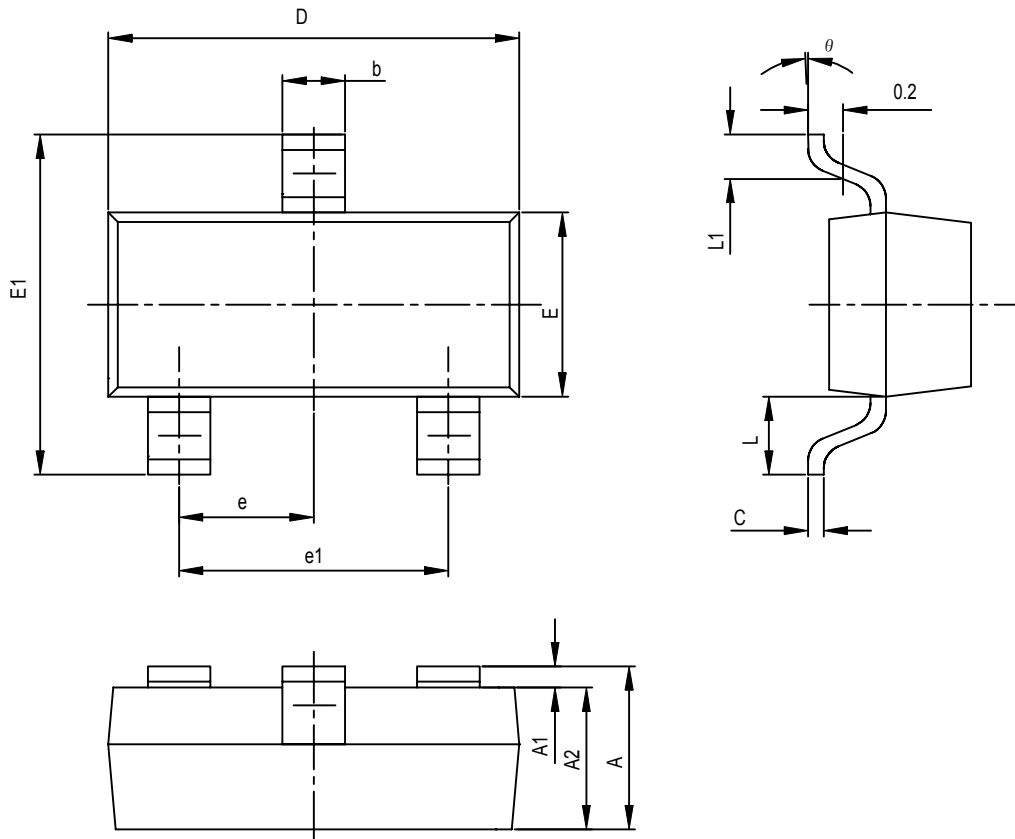SOT-23 PACKAGE OUTLINE DIMENSIONS


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.100	0.110	0.118
E	1.200	1.610	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TPY		0.037TPY	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°